Reflex Sensor
with Background Suppression

OHP551B0003 LASER

Part Number

- **Smallest Recognizable Distance Difference: 100 µm**
- **Spot Diameter: 0,3 mm**

These sensors are particularly well suited for recognizing objects in front of any type of background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

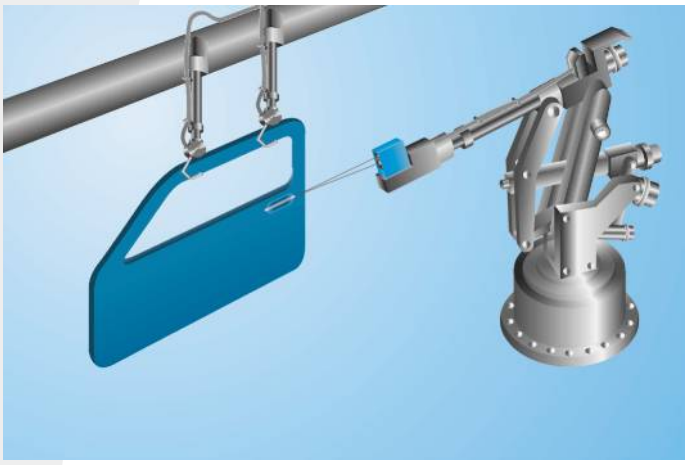

Technical Data

Optical Data	
Range	55 mm
Adjustable Range	45...55 mm
Switching Hysteresis	< 100 µm
Light Source	Laser (red)
Wave Length	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	< 0,3 mm
Focus Distance	75 mm
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (Ub = 24 V)	< 30 mA
Switching Frequency	800 Hz
Response Time	650 µs
Temperature Drift	< 5 µm/K
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
PNP Contamination Output/Switching Current	50 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
Contamination Output	●
PNP NO	●
Connection Diagram No.	103
Control Panel No.	P 2
Suiting Connection Technology No.	2
Suiting Mounting Technology No.	380

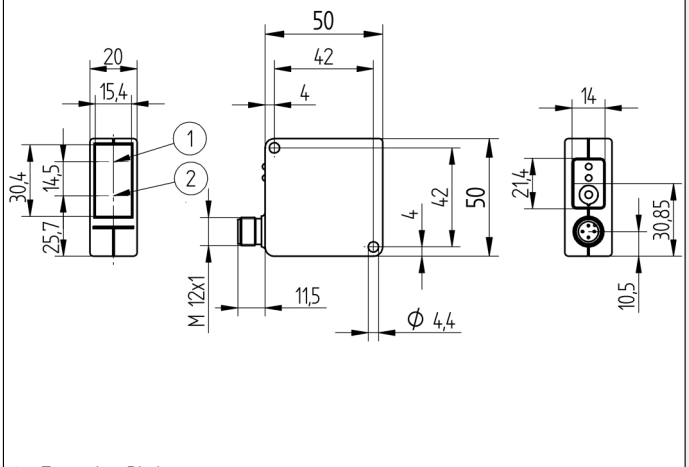

1 = Transmitter Diode
2 = Receiver Diode
All dimensions in mm (1 mm = 0.03937 Inch)

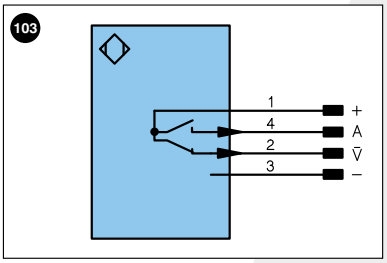

Legend

+	Supply Voltage +	U	Test Input	PoE	Power over Ethernet
–	Supply Voltage 0 V	Ū	Test Input inverted		
~	Supply Voltage (AC Voltage)	W	Trigger Input		
A	Switching Output (NO)	O	Analog Output		Wire Colors according to DIN IEC 757
Ā	Switching Output (NC)	O–	Ground for the Analog Output		
V	Contamination/Error Output (NO)	BZ	Block Discharge	BK	Black
V̄	Contamination/Error Output (NC)	AMV	Valve Output	BN	Brown
E	Input (analog or digital)	a	Valve Control Output +	RD	Red
T	Teach Input	b	Valve Control Output 0 V	OG	Orange
Z	Time Delay (activation)	SY	Synchronization	YE	Yellow
S	Shielding	E+	Receiver-Line	GN	Green
RxD	Interface Receive Path	S+	Emitter-Line	BU	Blue
TxD	Interface Send Path	⏚	Grounding	VT	Violet
RDY	Ready	SnR	Switching Distance Reduction	GY	Grey
GND	Ground	Rx+/–	Ethernet Receive Path	WH	White
CL	Clock	Tx+/–	Ethernet Send Path	PK	Pink
E/A	Output/Input programmable	Bus	Interfaces-Bus A(+)/B(–)	GNYE	Green Yellow
	IO-Link	La	Emitted Light disengageable		

Complementary Products

Protection Housing Set ZSP-NN-02
Protection Housing ZSV-0x-01

Ctrl.Panel



01 = Switching Status Indicator
05 = Switching Distance Adjuster
32 = Contamination Warning/ Error Warning

Switching Distance Deviation

Typical characteristic curve based on Kodak white, 90 %

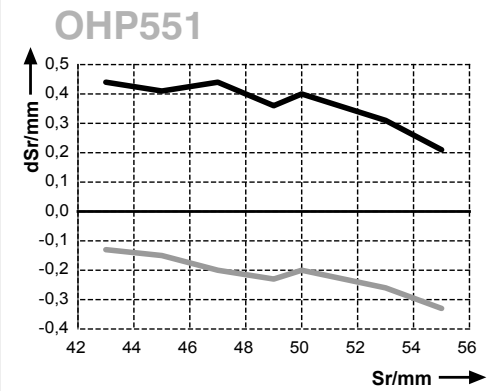

Sr = Switching Distance — black 6 %
dSr = Switching Distance Change — grey 18 %

Specifications are subject to change without notice