

Operating Instructions

P1KH055

Reflex Sensor with Background Suppression



EN



Table of Contents

1	General	3
1.1	Information Concerning these Instructions	3
1.2	Explanation of Symbols	3
1.3	Limitation of Liability	4
1.4	Copyrights	4
2	For Your Safety	5
2.1	Use for Intended Purpose	5
2.2	Use for Other than the Intended Purpose	5
2.3	Personnel Qualifications	5
2.4	Modification of Products	6
2.5	General Safety Precautions	6
2.6	Approvals and protection classes	6
3	Technical Data	7
3.1	General information	7
3.1.1	Light spot diameter	8
3.1.2	Range	8
3.2	Housing Dimensions	8
3.3	Control panel	9
3.4	Complementary Products	9
4	Transport and Storage	10
4.1	Transport	10
4.2	Storage	10
5	Installation and Electrical Connection	11
5.1	Installation	11
5.2	Adjustment	11
5.3	Electrical Connection	13
5.4	Diagnosis	14
5.5	Troubleshooting	14
6	Settings	16
6.1	Adjustment via Potentiometer	16
6.2	Setting via IO-Link and wTeach2	16
7	Maintenance Instructions	17
8	Proper Disposal	18
9	Declarations of Conformity	19

1 General

1.1 Information Concerning these Instructions

- It ensures safe and efficient use of the product.
- This manual is part of the product and must be retained for the entire service life.
- In addition, local accident prevention regulations and national occupational safety regulations must be observed.
- The product is subject to technical development, so the instructions and information in these operating instructions are also subject to change. You can find the current version at www.wenglor.com in the product's download section.



INFORMATION

The operating instructions must be read carefully before use and kept for future reference.

1.2 Explanation of Symbols

- Safety precautions and warnings are emphasized by means of symbols and signal words.
- Safe use of the product is only possible if these safety precautions and warnings are adhered to.

The safety precautions and warnings are laid out in accordance with the following principle:

SIGNAL WORD

Type and source of danger!

Possible consequences in the event that the hazard is disregarded.

→ Measures for averting the hazard.

The meanings of the signal words, as well as the scope of the associated hazards, are listed below:



⚠ DANGER

This signal word indicates a hazard with a high degree of risk which, if not avoided, results in death or severe injury.



⚠ WARNING

This signal word indicates a hazard with a medium degree of risk which, if not avoided, may result in death or severe injury.



⚠ CAUTION

This signal word indicates a hazard with a low degree of risk which, if not avoided, may result in minor or moderate injury.



NOTICE

This signal word draws attention to a potentially hazardous situation which, if not avoided, may result in property damage.



INFORMATION

Information draws attention to useful tips and suggestions, as well as information on efficient, error-free use.

1.3 Limitation of Liability

- The product has been developed in consideration of the current state-of-the-art technology, as well as applicable standards and guidelines. Subject to change without notice.
- A valid declaration of conformity can be accessed at www.wenglor.com in the product's separate download area.
- wenglor sensoric elektronische Geräte GmbH (hereinafter referred to as "wenglor") excludes all liability in the event of:
 - Non-compliance with the instructions
 - Use of the product for purposes other than those intended.
 - Use by untrained personnel.
 - Use of unapproved spare parts.
 - Unapproved modification of products.
- These operating instructions do not include any guarantees from wenglor with regard to the described procedures or specific product characteristics.
- wenglor assumes no liability for printing errors or other inaccuracies contained in these operating instructions unless wenglor was verifiably aware of such errors at the point in time at which the operating instructions were prepared.

1.4 Copyrights

- The contents of these instructions are protected by copyright law.
- All rights are reserved by wenglor.
- Commercial reproduction or any other commercial use of the provided content and information, in particular graphics and images, is not permitted without previous written consent from wenglor.

2 For Your Safety

2.1 Use for Intended Purpose

Reflex Sensors with Background Suppression

Reflex sensors with background suppression evaluate the light reflected by objects. As they operate according to the angle measurement principle, the object's color, shape, and surface finish have practically no influence on the detection range. Even dark objects are reliably recognized against bright backgrounds. When the object reaches the selected detection range, the sensor's output is switched.

This Product Can Be Used in the Following Industry Sectors:

- Special-purpose mechanical engineering
- Heavy mechanical engineering
- Logistics
- Automotive industry
- Food industry
- Packaging industry
- Pharmaceuticals industry
- Plastics industry
- Woodworking industry
- Consumer goods industry
- Paper industry
- Electronics industry
- Glass industry
- Steel industry
- Aviation industry
- Chemicals industry
- Alternative energies
- Raw materials extraction

2.2 Use for Other than the Intended Purpose

- Not a safety component in accordance with 2006/42/EC (Machinery Directive).
- The product is not suitable for use in potentially explosive atmospheres.
- The product may be used only with accessories supplied or approved by wenglor, or in combination with approved products. A list of approved accessories and combination products can be found at www.wenglor.com on the product detail page.



DANGER

Risk of personal injury or property damage in case of use for other than the intended purpose!

Use for other than the intended purpose may lead to hazardous situations.

→ Observe instructions regarding use for intended purpose.

2.3 Personnel Qualifications

- Suitable technical training is a prerequisite.
- In-house electronics training is required.
- Trained personnel who use the product must have (permanent) access to the operating instructions.



DANGER

Risk of personal injury or property damage in case of incorrect initial start-up and maintenance!

Personal injury and damage to equipment may occur.

→ Adequate training and qualification of personnel

2.4 Modification of Products



DANGER

Risk of personal injury or property damage if the product is modified!

Personal injury and damage to equipment may occur. Noncompliance may result in loss of the CE and/or UKCA mark and voiding of the warranty.

→ Modification of the product is not permitted

2.5 General Safety Precautions



INFORMATION




These instructions are an integral part of the product and must be kept on hand for the entire duration of its service life.

In the event of possible changes, the current version of the operating instructions can be found at www.wenglor.com in the product's separate download area.

Read the operating instructions carefully before using the product.

Protect the sensor against contamination and mechanical influences.

2.6 Approvals and protection classes



3 Technical Data

3.1 General information

	P1KH055
Optical data	
Range	1300 mm
Setting Range	100...1300 mm
Switching Hysteresis	< 7 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	40000 Lux
Electrical data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 25 mA
Switching Frequency	200 Hz
Switching Frequency (interference-free mode)	40 Hz
Response Time	2.5 ms
Response time (interference-free mode)	13 ms
Temperature Drift	< 10 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic, ABS/PC
Degree of Protection	IP67 IP68
Connection	M8 × 1; 4-pin
Optic Cover	Plastic, PMMA
Safety technology data	
MTTFd (EN ISO 13849-1)	1073.57 a
General data	
Scope of delivery	1 × initial start-up instructions 1 × sensor
Output functions	
Output	PNP
Circuit	NC+NO
Adjustable parameters	
Output	PNP

P1KH055	
Circuit	inactive Error output NC NC+NO NO
Other parameters	Off-delay On-delay Mode of operation Hysteresis Switching point Emitted light

3.1.1 Light spot diameter


Detection Range	100 mm	600 mm	1300 mm
Light Spot Diameter	10 mm	25 mm	50 mm

3.1.2 Range

Typical maximum switching distance deviation $dSr = \pm 0,06$ m

White 90% remission	2,50 m
Gray 18 % remission	2,00 m
Black 6 % remission	1,20 m

3.2 Housing Dimensions

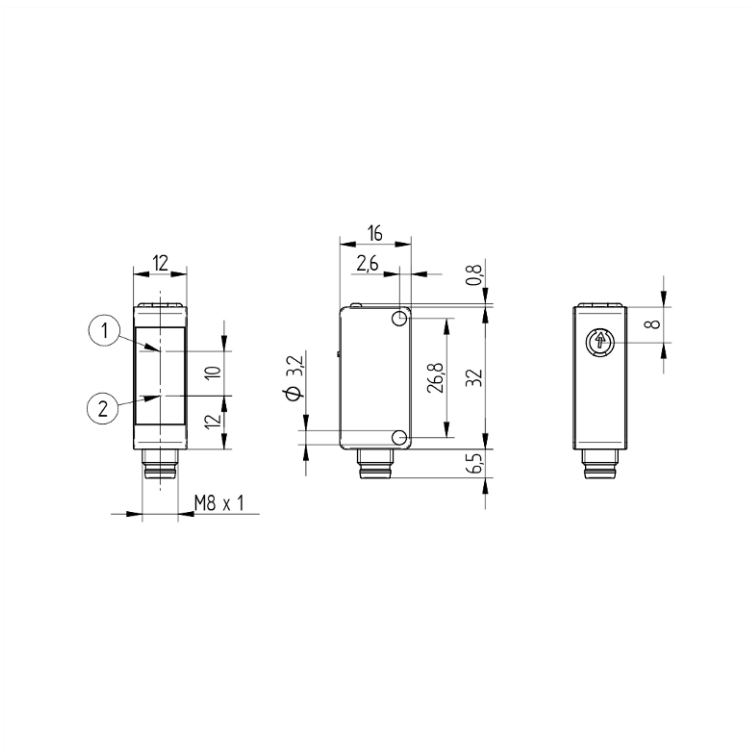

① Receiver Diode


② Transmitter Diode

Screw M3 = 0,5 Nm

Dimensions in mm (1 mm = 0.03937 inch)

3.3 Control panel

1K4



- 05 = Switching Distance Adjuster
- 68 = Power LED
- 5a = Switching Status Indicator, O1

3.4 Complementary Products

wenglor offers you the right connection and mounting technology as well as other accessories for your product. You can find this at www.wenglor.com on the product details page at the bottom.

4 Transport and Storage

4.1 Transport

Upon receipt of shipment, the goods must be inspected for damage in transit. In the case of damage, conditionally accept the package and notify the manufacturer of the damage. Then return the device, making reference to damage in transit.

4.2 Storage

The following points must be taken into consideration with regard to storage:

- Do not store the product outdoors.
- Store the product in a dry, dust-free place.
- Protect the product against mechanical impacts.
- Protect the product against exposure to direct sunlight.



NOTICE

Risk of property damage in case of improper storage!

The product may be damaged.

→ Storage instructions must be complied with.

5 Installation and Electrical Connection

5.1 Installation

- Protect the product from contamination during installation.
- Relevant electrical and mechanical regulations, standards, and safety rules must be observed.
- Protect the product from mechanical impact.
- Ensure that the sensor is mechanically secure.
- Torque values must be observed (see section Technical Data [▶ 7]).



NOTICE

Risk of property damage in case of improper installation!

The product may be damaged!

→ Comply with installation instructions.



CAUTION

Risk of personal injury or property damage during installation!

Personal injury and damage to the product may occur.

→ Ensure a safe installation environment.

5.2 Adjustment

The following guidelines should be followed during sensor calibration to ensure the most stable object detection possible:

Highly glossy, reflective, and uneven objects



Care should be taken to ensure that no direct reflections fall on the receiving optics when dealing with highly reflective, shiny, or uneven surfaces, as they can impair object detection.

Steps, edges, and recesses




To ensure reliable detection, the light spot must be aligned directly with the object. If the light spot is large, ensure the object is of sufficient size.

Object movement



For moving objects, the movement should be at a right angle to the sensor's emitter/receiver axis to avoid direct reflections onto the receiver.

Background

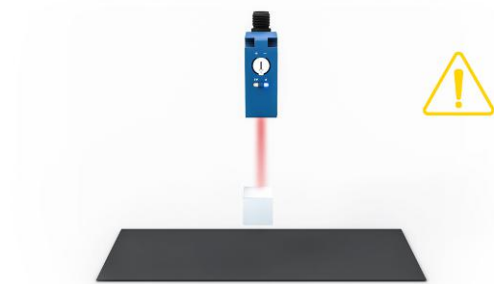

If possible, align reflex sensors with background suppression to a defined, static background. Ensure that the object is at a sufficient distance from the background in accordance with the sensor's switching hysteresis.



NOTICE

In the preset mode of operation (Standard Mode), it is recommended to limit the distance between the sensor and the background to a maximum of 15 m.

Otherwise, ambiguities in object detection are possible (for example, with highly reflective objects in the background).

If the background is at a distance greater than 15 m, it is recommended to use Interference-Free Mode.

5.3 Electrical Connection

- Wire the sensor according to the connection diagram.
- Switch on the supply voltage (see section Technical Data [► 7]).
- If using IO-Link, connect the sensor to 18...30 V DC.
- If not using IO-Link, connect the sensor to 10...30 V DC.




DANGER

Risk of personal injury or property damage due to electric current.





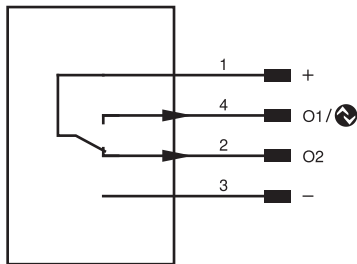


Live parts may cause damage to persons and equipment.




→ The electrical device may only be connected by qualified personnel.



pin	Pin function	Polarity	Circuit
1	Supply voltage +		
2	switching output	PNP	antivalent
3	Supply voltage 0 V		
4	switching output	PNP	NO

5.4 Diagnosis

display	Status	Meaning
Power LED P		Sensor ready
		No voltage supply available
		Warning The LED for switching status indicator A1 remains in operation
		Error The LED for switching status indicator A1 is not functioning
		Localization Localization function active, A1 remains in operation
Switching status indicator A1		switching output active
		Switching output not active

	= Not illuminated
	= Permanently lit
	= Flashing

5.5 Troubleshooting

Error	Short circuit	<ul style="list-style-type: none"> Check the electrical wiring and eliminate the short circuit
	Temperature error	<ul style="list-style-type: none"> Disconnect the sensor from the supply voltage and allow it to cool Mount the mounting bracket as a heat sink Reduce load on outputs
	Device error	<ul style="list-style-type: none"> Disconnect the sensor from the supply voltage and restart it Replace the sensor



INFORMATION

Action in case of error:

1. Take the machine out of service.
2. Analyze and rectify the cause of the error using the diagnostic information.
3. If the fault cannot be rectified, contact wenglor support.
4. Do not operate the machine if the error behavior is unclear.
5. The machine must be taken out of service if the error cannot be clearly identified or reliably rectified.



DANGER

Risk of personal injury or property damage if not observed!

The safety function of the system is disabled. Damage to personnel and equipment.

→ Behavior in case of error as specified.

6 Settings

The sensor can be set via the control, IO-Link and wTeach2. The different setting options are outlined below.

6.1 Adjustment via Potentiometer

Object detection directly in front of a background or surface

- Adjust the sensor and mount it securely so that the light spot falls perpendicularly onto the object to be detected.
- Turn the potentiometer to the right stop or maximum switching distance setting.
- Remove the object, then slowly turn the potentiometer back until the output switches. The background or surface is now masked out.
- Place the object back under the light spot and check whether the sensor switches on again.

Detection of objects without a distracting background

- Adjust the sensor and mount it securely so that the light spot falls perpendicularly onto the object to be detected.
- Turn the potentiometer to the left stop or minimum switching distance setting.
- Turn the potentiometer until the sensor switches on, and turn it slightly further if necessary to increase switching reliability.

6.2 Setting via IO-Link and wTeach2

The sensors can exchange parameters and process data via IO-Link. The parameters can be used to make many additional settings on the device. The process data transmit cyclical data and condition monitoring.

To this end, the sensor is connected to a suitable IO-Link master (see product detail page/complementary products). The interface protocol and the IODD can be found at www.wenglor.com in the download area for the respective product.

For information on installing and connecting the wTeach2 software and its structure, as well as information on the general functions, see the wTeach2 operating instructions. They can be found online in the download area at www.wenglor.com under order number DNNF005.

7 Maintenance Instructions



NOTICE

This wenglor product is maintenance-free.

Cleaning and inspection of the plug connections at regular intervals are advisable.

Do not clean the product with solvents or cleaning agents that could damage the product.

The product must be protected against contamination during initial start-up.

8 Proper Disposal

wenglor sensoric GmbH does not accept the return of unusable or irreparable products. Respectively valid national waste disposal regulations apply to product disposal.

9 **Declarations of Conformity**

Declarations of conformity can be found on our website at www.wenglor.com in the product's separate download area.