

brose

Excellence in Mechatronics

Brose Fahrzeugteile SE & Co. KG

Released Components

List Electrics BN569001 2023


Photoelectronic Sensors

Ultrasonic Sensors

2D/3D Sensors

1D/2D and Barcode Scanners

System Components

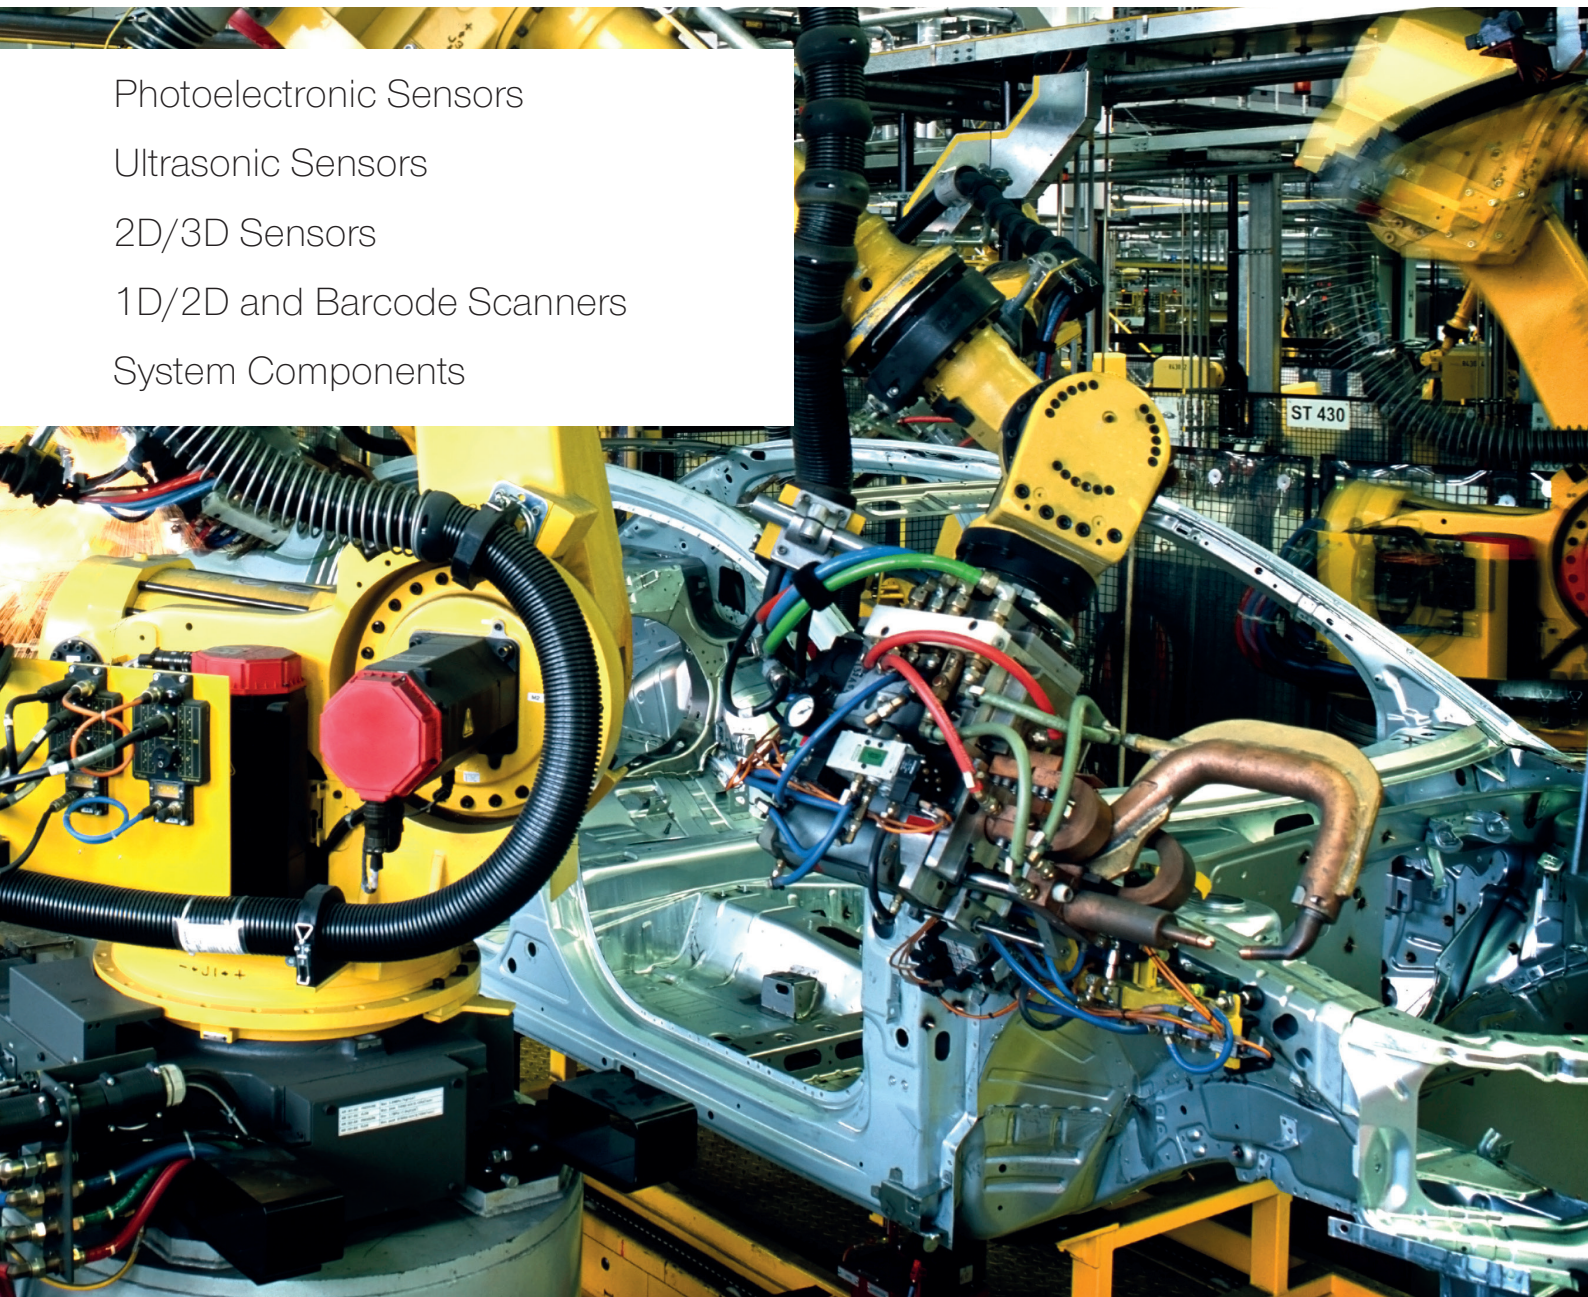

Contact persons

Contact person at Brose Fahrzeugteile SE & Co. KG, Coburg

Frank Gräbert
Control technology/production technology
Brose Gruppe
Otto-Hahn-Straße 34
42369 Wuppertal
Germany
Phone +49 202 4667 385
Fax +49 202 4667 77385
Mobile+49 15112247130
E-mail frank.graebert@brose.com
Internet www.brose.com

Contact person at wenglor sensoric GmbH

Patrick Junker
Key Account Management
wenglor sensoric GmbH
wenglor Str. 3
DE-88069 Tett nang
Phone +49 (0)7542 5399-257
Fax +49 (0)7542 5399 958
Mobile +49 (0)16095664768
E-mail patrick.junker@wenglor.com
Internet www.wenglor.com

Further contact persons at wenglor sensoric GmbH

DE – Coburg

Gunther Riethmüller-Haupt
Area Sales Expert SensorTec
Phone +49 (0)7542 5399-154
Mobile +49 (0)170 7849 609
E-mail gunther.riethmueller@wenglor.com

Holger Tauer
Senior Area Sales Expert CamTec
Phone +49 (0)75425 399-147
Mobile +49 (0)151 4634 9995
E-mail holger.tauer@wenglor.com

DE – Würzburg

Dominik Jeßberger
Senior Area Sales Manager SensorTec
Phone +49 (0)7542 5399-186
Mobile +49 (0)171 1546 058
E-mail dominik.jessberger@wenglor.com

Tim Spengler
Area Sales Expert CamTec
Telefon +49 (0)7542 5399-190
Mobil +49 (0)160 9088 9661
E-Mail tim.spengler@wenglor.com

DE – Bamberg/Hallstadt

David Hoffmann
Technical Sales Manager SensorTec
Telefon +49 (0)7542 5399-191
Mobil +49 (0)170 8553 163
E-Mail david.hoffmann@wenglor.com

Tim Spengler
Area Sales Expert CamTec
Telefon +49 (0)7542 5399-190
Mobil +49 (0)160 9088 9661
E-Mail tim.spengler@wenglor.com

DE – Wuppertal

Uwe Ising
Executive Area Sales Expert SensorTec
Phone +49 (0)7542 5399-150
Mobile +49 (0)171 7717 794
E-mail uwe.ising@wenglor.com

Matthias Klein
Area Sales Expert CamTec
Telefon +49 (0)7542 5399-180
Mobil +49 (0)160 9051 7133
E-Mail matthias.klein@wenglor.com

USA

Thomas Wagner
General Manager USA
Phone +1 93 7320 0011
Mobile +1 93 7668 1300
E-mail thomas.wagner@wenglor.com

China

Carl Wang
Country Leader China
Telefon +86 21 6855 4890
Mobil +86 138 1613 3871
E-Mail carl.wang@wenglor.com

Dear Ladies and Gentlemen,

In these official regulations of Brose Fahrzeugteile SE & Co. KG you will find the approved sensors of the company wenglor sensoric GmbH.

This approved material list contains all the necessary technical data and drawings.

It will help to find the right sensor for your application.

You can download all our drawings in 2D and 3D format from the Internet at www.wenglor.com. We will be happy to answer any further questions you may have.

Best regards,



Patrick Junker
Key Account Manager
wenglor sensoric GmbH

Content

	Page																														
Contact Person/Letter	2 - 5																														
Index	6 - 7																														
Photoelectronic Sensors	8 - 27																														
Laser Distance Sensors	10-15																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>P1KY001</td> <td>0...1000 mm</td> <td>Laser (red)</td> <td>32 × 22 × 12 mm (1K)</td> <td>Plastic</td> <td>11</td> </tr> <tr> <td>OY2P303A0135</td> <td>0...3000 mm</td> <td>Laser (red)</td> <td>50 × 50 × 20 mm (P)</td> <td>Plastic</td> <td>13</td> </tr> <tr> <td>OCP662X0135</td> <td>660 mm</td> <td>Laser (red)</td> <td>50 × 50 × 20 mm (P)</td> <td>Plastic</td> <td>15</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		P1KY001	0...1000 mm	Laser (red)	32 × 22 × 12 mm (1K)	Plastic	11	OY2P303A0135	0...3000 mm	Laser (red)	50 × 50 × 20 mm (P)	Plastic	13	OCP662X0135	660 mm	Laser (red)	50 × 50 × 20 mm (P)	Plastic	15							
Part Number	Range	Light Source	Dimensions	Housing Material																											
P1KY001	0...1000 mm	Laser (red)	32 × 22 × 12 mm (1K)	Plastic	11																										
OY2P303A0135	0...3000 mm	Laser (red)	50 × 50 × 20 mm (P)	Plastic	13																										
OCP662X0135	660 mm	Laser (red)	50 × 50 × 20 mm (P)	Plastic	15																										
Reflex Sensors with Background Suppression	16-21																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>P1KH006</td> <td>120 mm</td> <td>Laser (red)</td> <td>32 × 16 × 12 mm (1K)</td> <td>Plastic</td> <td>17</td> </tr> <tr> <td>P1KH019</td> <td>150 mm</td> <td>Blue Light</td> <td>32 × 16 × 12 mm (1K)</td> <td>Plastic</td> <td>19</td> </tr> <tr> <td>P1KH004</td> <td>150 mm</td> <td>Red Light</td> <td>32 × 16 × 12 mm (1K)</td> <td>Plastic</td> <td>19</td> </tr> <tr> <td>HO08PA3</td> <td>80 mm</td> <td>Red Light</td> <td>M12 × 1</td> <td>CuZn, nickel-plated</td> <td>21</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		P1KH006	120 mm	Laser (red)	32 × 16 × 12 mm (1K)	Plastic	17	P1KH019	150 mm	Blue Light	32 × 16 × 12 mm (1K)	Plastic	19	P1KH004	150 mm	Red Light	32 × 16 × 12 mm (1K)	Plastic	19	HO08PA3	80 mm	Red Light	M12 × 1	CuZn, nickel-plated	21	
Part Number	Range	Light Source	Dimensions	Housing Material																											
P1KH006	120 mm	Laser (red)	32 × 16 × 12 mm (1K)	Plastic	17																										
P1KH019	150 mm	Blue Light	32 × 16 × 12 mm (1K)	Plastic	19																										
P1KH004	150 mm	Red Light	32 × 16 × 12 mm (1K)	Plastic	19																										
HO08PA3	80 mm	Red Light	M12 × 1	CuZn, nickel-plated	21																										
Fiber-Optic Cable Amplifiers	22-23																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>ODX402P0088</td> <td></td> <td>Red Light</td> <td>53 × 60 × 50 mm (X)</td> <td>Plastic</td> <td>23</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		ODX402P0088		Red Light	53 × 60 × 50 mm (X)	Plastic	23																			
Part Number	Range	Light Source	Dimensions	Housing Material																											
ODX402P0088		Red Light	53 × 60 × 50 mm (X)	Plastic	23																										
Retro-Reflex Sensors Universal	24-25																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>P1NL101</td> <td>7000 mm</td> <td>Red Light</td> <td>75 × 32,5 × 18 mm (1N)</td> <td>Plastic</td> <td>25</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		P1NL101	7000 mm	Red Light	75 × 32,5 × 18 mm (1N)	Plastic	25																			
Part Number	Range	Light Source	Dimensions	Housing Material																											
P1NL101	7000 mm	Red Light	75 × 32,5 × 18 mm (1N)	Plastic	25																										
Retro-Reflex Sensors with light band	26-27																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>P1EL300</td> <td>1600 mm</td> <td>Laser (red)</td> <td>83 × 63 × 27 mm (1E)</td> <td>Plastic</td> <td>27</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		P1EL300	1600 mm	Laser (red)	83 × 63 × 27 mm (1E)	Plastic	27																			
Part Number	Range	Light Source	Dimensions	Housing Material																											
P1EL300	1600 mm	Laser (red)	83 × 63 × 27 mm (1E)	Plastic	27																										
Ultrasonic Sensors	28 - 31																														
Ultrasonic Distance Sensors	30-31																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>U1KT001</td> <td>30...400 mm</td> <td>32 × 16 × 12 mm (1K)</td> <td>Plastic</td> <td>31</td> </tr> </tbody> </table>	Part Number	Range	Dimensions	Housing Material		U1KT001	30...400 mm	32 × 16 × 12 mm (1K)	Plastic	31																					
Part Number	Range	Dimensions	Housing Material																												
U1KT001	30...400 mm	32 × 16 × 12 mm (1K)	Plastic	31																											
2D/3D Sensors	32 - 35																														
2D/3D Profile Sensors	34-35																														
<table border="1"> <thead> <tr> <th>Part Number</th> <th>Range</th> <th>Light Source</th> <th>Dimensions</th> <th>Housing Material</th> <th></th> </tr> </thead> <tbody> <tr> <td>MLSL123</td> <td>90...280 mm</td> <td>Laser (red)</td> <td>92 × 64,6 × 38 mm</td> <td>Aluminium; Plastic</td> <td>35</td> </tr> </tbody> </table>	Part Number	Range	Light Source	Dimensions	Housing Material		MLSL123	90...280 mm	Laser (red)	92 × 64,6 × 38 mm	Aluminium; Plastic	35																			
Part Number	Range	Light Source	Dimensions	Housing Material																											
MLSL123	90...280 mm	Laser (red)	92 × 64,6 × 38 mm	Aluminium; Plastic	35																										

1D/2D and Barcode Scanners

36 - 39

1D/2D Code Scanners

38-39

Part Number	Range	Light Source	Dimensions	Housing Material	
C5PC103	50...300 mm	Red Light	25,4 × 44,4 × 44,5 mm	Metal	39
C5PC211	50...300 mm	Red Light	25,4 × 44,4 × 44,5 mm	Metal	39

System Components

40 - 49

Mounting Technology

42-46

Part Number		
W12S12AL	Mounting for M12 × 1	42
W8S12AL	Mounting for M8 × 1	42
WNS12AL	Mounting for 76 × 32,5 × 18 mm (N)	42
WPS12AL	Mounting for 50 × 50 × 20...30 mm (P)	42
WKS12AL	Mounting for 32 × 16/22 × 12 mm (K/1K)	43
Z1EX003	Mounting Bracket for 83 × 63 × 27 mm (1E)	44
WN	Mounting Bracket for 76 × 32,5 × 18 mm (N)	44
WP	Mounting Bracket for 50 × 50 × 20...30 mm (P)	44
WK	Mounting Bracket for 32 × 16/22 × 12 mm (K/1K)	44
BSM12B	Mounting Clamp for M12 × 1	45
BSM12NB	Mounting Clamp for M12 × 1	45
BSM8NB	Mounting Clamp for M8 × 1	45
BSM5NB	Mounting Clamp for M5 × 0,5	45
Z08M001	Mounting Console with Fixed Limit Stop for M8 × 1; Flush Mounting	46
Z08M002	Mounting Console with Fixed Limit Stop for M8 × 1; Semi-Flush Mounting	46
Z08M003	Mounting Console with Fixed Limit Stop for M8 × 1; Non-Flush Mounting	46

Reflectors and Reflector Foils

47

Part Number		
Z90R009	Reflector	47
RE6040BA	Reflector 60 × 41 × 8 mm	47

Connection Equipment and Connection Boxes

48-49

Part Number		
S23-2M	Connection Line M12 × 1; 4-pin	48
S61-2M	Connection Line M8 × 1; 4-pin	48
S49-2M	Connection Line M8 × 1; 3-pin	49
S80-2M	Connection Line M12 × 1; 8-pin	49

Connection Diagrams

50 - 51

Index alphabetical

52 - 53

Change History

54 - 55



Photoelectronic Sensors

wenglor sensoric is your competent partner for photoelectronic sensors. Our diverse range of innovative products provide solutions for complex automation applications. Our photoelectronic sensors can detect or count objects without contact, measure distances with high accuracy and identify colors, brightness or luminescence.

Various mounting systems allow for easy, flexible installation. Fiber optic cables that can be connected to sensors allow them to be used under extreme conditions or in tight spaces.

On the following pages you will find:

Laser Distance Sensors	10-15
Reflex Sensors with Background Suppression	16-21
Fiber-Optic Cable Amplifiers	22-23
Retro-Reflex Sensors Universal	24-25
Retro-Reflex Sensors with light band	26-27

Laser Distance Sensor

Time of Flight

0...1000 mm

LASER

Range


der wintec.



- Interference-free towards gloss in the background with wintec
- Miniature design
- No mutual interference with wintec
- Reliable in case of glossy objects with wintec
- Secure detection of black objects also in extremely inclined positions with wintec


These miniature sensors determine distance between the sensor and the object by means of transit time measurement.



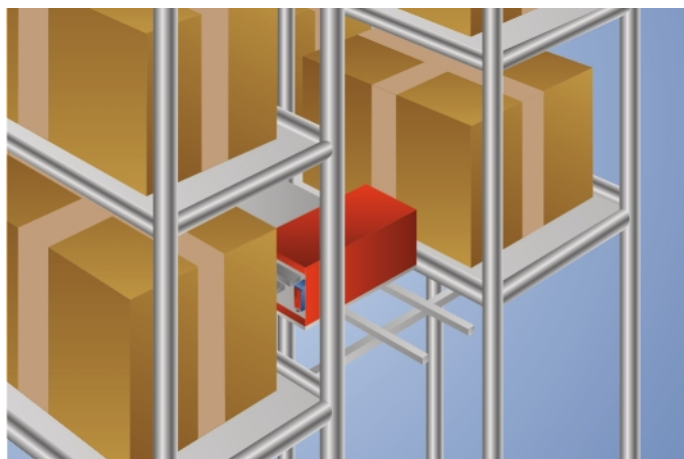



wenglor's interference-free technology (wintec) is revolutionizing sensor technology: it prevents numerous sensors arranged directly opposite or next to each other from interfering with one another. The sensors reach a very high switching frequency and use laser class 1, which is safe for the human eye.

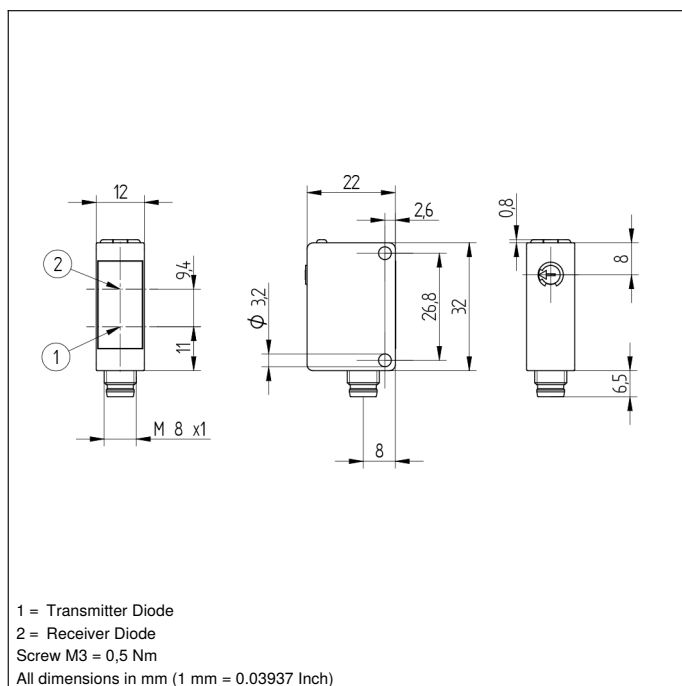

Technical Data

Optical Data	
Working Range	0...1000 mm
Setting Range	100...1000 mm
Switching Hysteresis	< 20 mm
Light Source	Laser (red)
Wavelength	680 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Beam Divergence	< 16 mrad
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Triple Dot Laser	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	1000 Hz
Response Time	0,5 ms
Temperature Drift	< 2,5 %
Temperature Range	-40...50 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	1620293-001
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Optic Cover	PMMA
Degree of Protection	IP67
Connection	M8 × 1; 4-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	996,97 a



Plug Version	
  	Part Number P1KY001
  	
PNP NC, PNP NO	●
Connection Diagram No.	101
Control Panel No.	1K1
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400

Connection Diagrams page 50 / System Components page 40

Table 1


Working Distance	100 mm	500 mm	1000 mm
Light Spot Diameter	4 mm	7 mm	15 mm

Complementary Products

PNP-NPN Converter BG7V1P-N-2M

Ctrl. Panel

1K1




05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

P1KY0

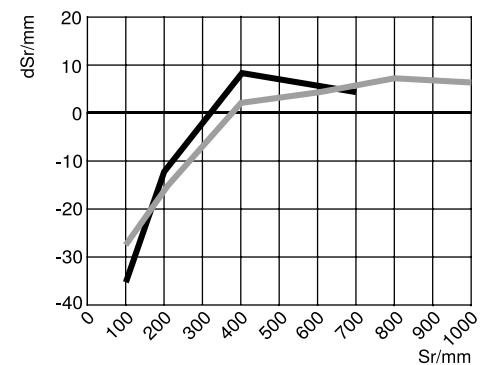

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

— grey 18 % remission

Laser Distance Sensor

Time of Flight

0...3000 mm

LASER

Range

der wintec.




- Interference-free towards gloss in the background with wintec
- No mutual interference with wintec
- Reliable in case of glossy objects with wintec
- Secure detection of black objects also in extremely inclined positions with wintec

These sensors have scratch-resistant optics and the emitted light can be switched off. They use the transit time measurement principle to measure the distance between the sensor and the object.


wenglor interference-free technology (wintec) has revolutionized sensor technology:



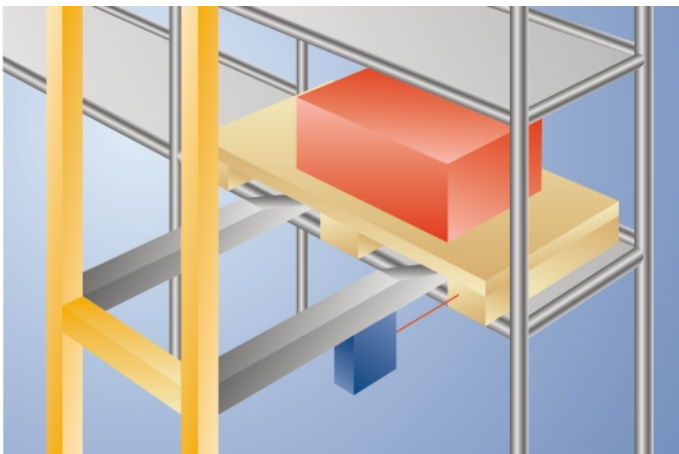



It makes it possible to mount several sensors directly next to, or opposite each other without the sensors influencing each other. The sensors reach a very high switching frequency and use laser class 1, which is safe for the human eye.

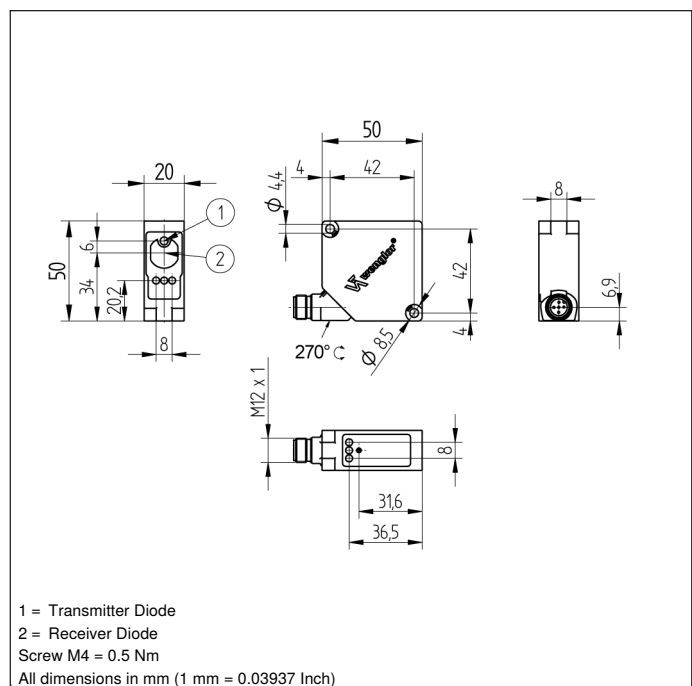

Technical Data

Optical Data	
Working Range	0...3000 mm
Setting Range	200...3000 mm
Switching Hysteresis	< 15 mm
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Beam Divergence	< 2 mrad
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 50 mA
Switching Frequency	1000 Hz
Response Time	0,5 ms
Temperature Drift (-10 °C < T _u < 50 °C)	< 1 %
Temperature Drift (T _u < -10 °C, T _u > 50 °C)	< 2,5 %
Temperature Range	-40...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	0710891-003
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Optic Cover	PMMA
Degree of Protection	IP68
Connection	M12 x 1; 4/5-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	771,39 a



Plug Version	
  	Part Number OY2P303A0135
  	
PNP NC, PNP NO	●
Connection Diagram No.	780
Control Panel No.	P10
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	380

Connection Diagrams page 50 / System Components page 40

Complementary Products


PNP-NPN Converter BG2V1P-N-2M

Protective Housing ZSV-0x-01

Set Protective Housing ZSP-NN-02

Ctrl. Panel

P10




01 = Switching Status Indicator
 02 = Contamination Warning
 06 = Teach Button
 68 = supply voltage indicator

Table 1

Working Distance	0 m	3 m
Light Spot Diameter	5 mm	9 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

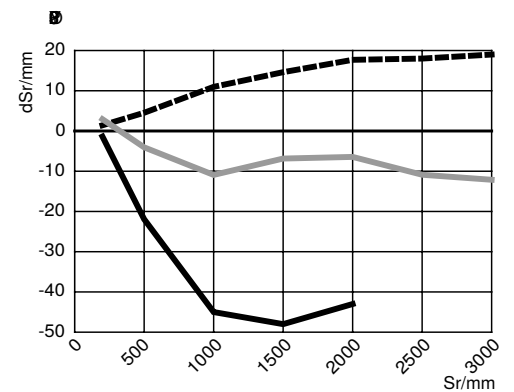

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

- - - grey 18 % remission

⋯ Aluminum

Laser Distance Sensor

Triangulation

660 mm LASER

Range




- CMOS line array
- Highly accurate switching distance
- Minimal switching hysteresis
- Switching point independent of material, color and brightness

These sensors work with a high resolution CMOS line and DSP technology and calculate the distance via an angle measurement. This virtually eliminates switching point differences caused by material, color and brightness.


Two independent switching outputs are available, at which two switching thresholds and one on-delay or off-delay time can be set in 10 ms increments.



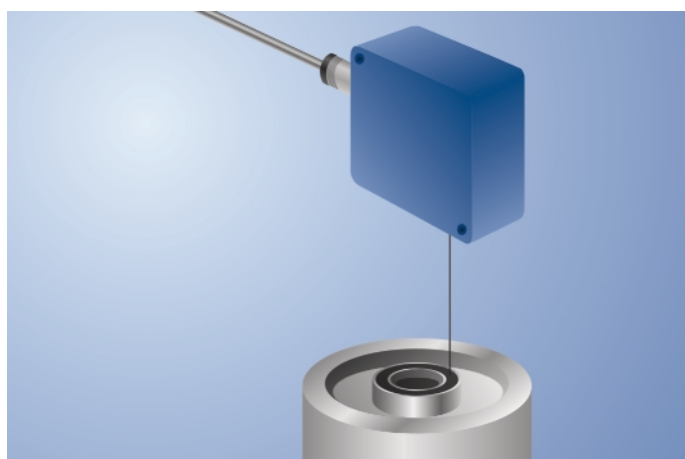


Sensor functions can be activated and values can be output via the RS-232 interface.

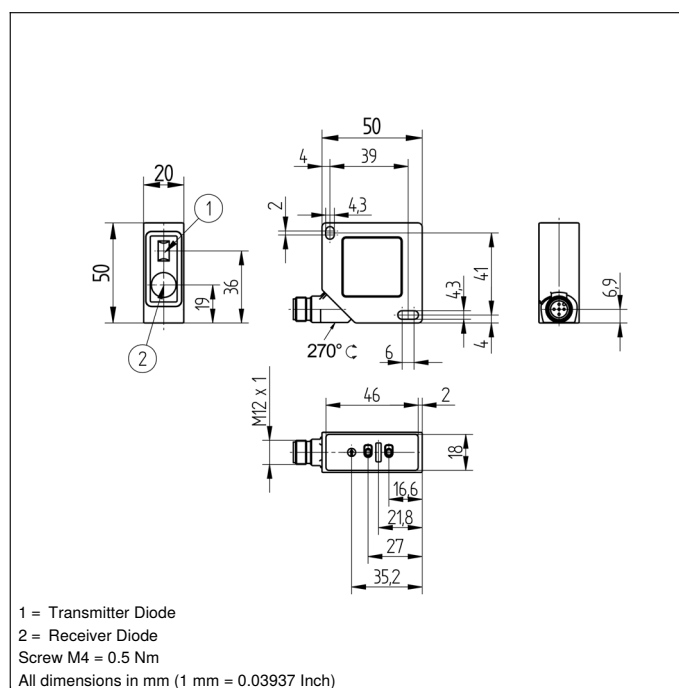

Technical Data

Optical Data	
Range	660 mm
Setting Range	60...660 mm
Switching Hysteresis	< 1 %
Light Source	Laser (red)
Wavelength	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 50 mA
Switching Frequency	100 Hz
Response Time	< 5 ms
On-/Off-Delay (RS-232)	0...1 s
Temperature Drift	< 50 μm/K
Temperature Range	-25...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 1,5 V
Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Teach Mode	HT, VT, FT, TP
Baud Rate	9600 Bd
Protection Class	III
FDA Accession Number	1120728-000
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin



		Plug Version	
  		Part Number	OCP662X0135
 			
Error Output			●
PNP NO			●
RS-232 with Adapterbox			●
External teach-in input			●
Connection Diagram No.		779	
Control Panel No.		P8	
Suitable Connection Equipment No.		2	35
Suitable Mounting Technology No.		380	

Connection Diagrams page 50 / System Components page 40

Complementary Products

Adapterbox A232


Protective Housing ZSV-0x-01

Set Protective Housing ZSP-NN-02

Software

Ctrl. Panel

P8



01 = Switching Status Indicator 25 = Minus Button

03 = Error Indicator

07 = Selector Switch

24 = Plus Button

Table 1

Detection Range	60 mm	660 mm
Spot Size	0,5 x 1,2 mm	2 x 5,5 mm

Reflex Sensor

with Background Suppression


120 mm LASER

Range




- Condition monitoring
- Detect extremely small parts starting at 0.1 mm
- IO-Link 1.1
- Laser class 1



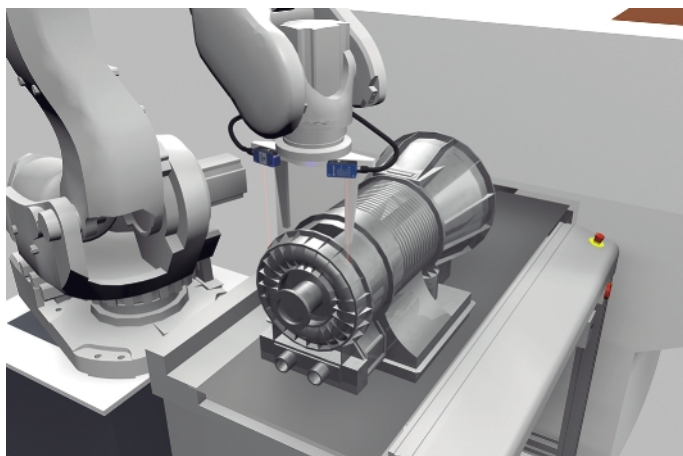



The reflex sensor with background suppression works with laser light according to the angle measurement principle and is designed to detect objects against any background. The sensor always has the same switching distance, regardless of the color, shape and surface of the objects. The fine laser beam means that even the smallest parts, starting at 0.1 mm in size, can be reliably detected. The IO-Link interface can be used to configure the reflex sensors (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and distance values.

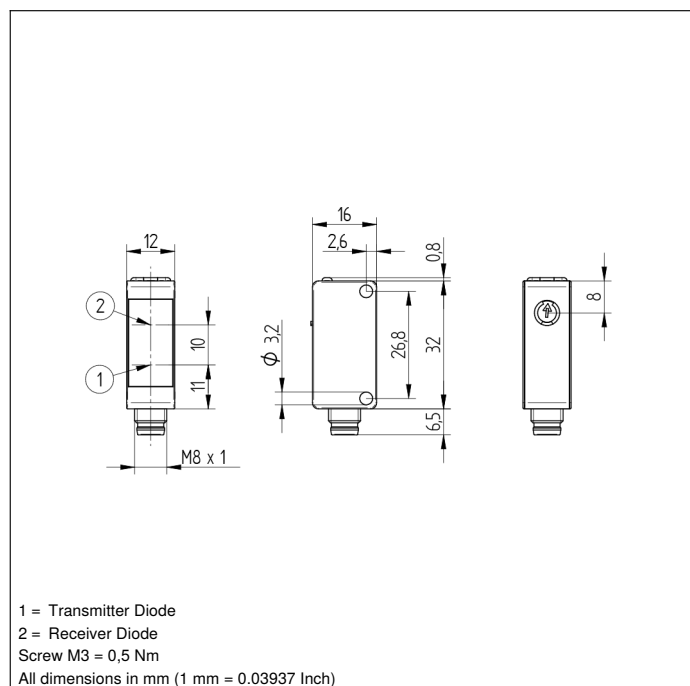

Technical Data

Optical Data	
Range	120 mm
Setting Range	30...120 mm
Switching Hysteresis	< 10 %
Light Source	Laser (red)
Wavelength	680 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	1000 Hz
Switching Frequency (interference-free mode)	500 Hz
Response Time	0,5 ms
Response time (interference-free mode)	1 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III
FDA Accession Number	1710976-001
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M8 × 1; 4-pin
Optic Cover	PMMA
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1641,23 a



Plug Version	
     	Part Number P1KH006
PNP NC, PNP NO	●
IO-Link	●
Connection Diagram No.	215
Control Panel No.	1K1
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400


Connection Diagrams page 50 / System Components page 40

Complementary Products

IO-Link Master
 Software

Ctrl. Panel

1K1




05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator

Table 1

Detection Range	40 mm	80 mm	120 mm
Light Spot Diameter	2,5 mm	1,5 mm	1 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

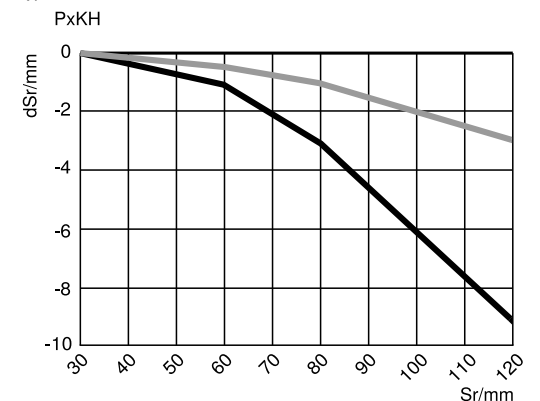

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

— grey 18 % remission

Reflex Sensor

with Background Suppression


150 mm

Range




- Blue light for dark, shiny objects
- Condition monitoring
- IO-Link 1.1
- Low switching distance deviation for black/white
- Reliably detect objects against any background



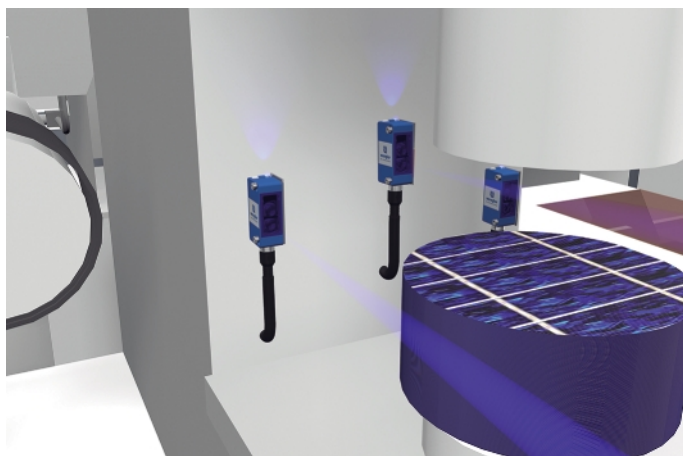


The reflex sensor with background suppression works with blue light according to the angle measurement principle and is designed to detect objects against any background. The sensor always has the same switching distance, regardless of the color, shape and surface of the objects. The reflect sensor with blue light is specially designed for applications with dark shiny objects, such as when manufacturing solar wafers. The IO-Link interface can be used to configure the reflex sensors (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and distance values.

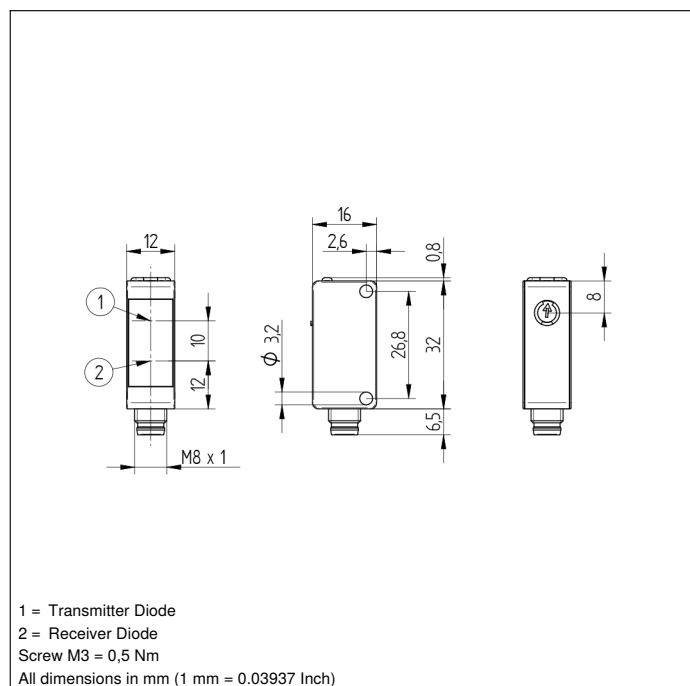

Technical Data

Optical Data	
Range	150 mm
Setting Range	30...150 mm
Switching Hysteresis	< 10 %
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	1000 Hz
Switching Frequency (interference-free mode)	500 Hz
Response Time	0,5 ms
Response time (interference-free mode)	1 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Optic Cover	PMMA



	Plug Version	
	P1KH019	P1KH004
  		
 		
Part Number	P1KH019	P1KH004
PNP NO		●
PNP NC, PNP NO	●	
IO-Link	●	●
Light Source	Blue Light	Red Light
Risk Group (EN 62471)	1	
Connection	M8 × 1; 4-pin	M8 × 1; 3-pin
MTTFd (EN ISO 13849-1)	1717,03 a	1725,77 a
Connection Diagram No.	215	216
Control Panel No.	1K1	1K1
Suitable Connection Equipment No.	7	8
Suitable Mounting Technology No.	400	400


Connection Diagrams page 50 / System Components page 40

Complementary Products

IO-Link Master
Software

Ctrl. Panel

1K1



05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator


Table 1

Detection Range	50 mm	100 mm	150 mm
Light Spot Diameter	4 mm	6 mm	10 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

P1KH BLUE

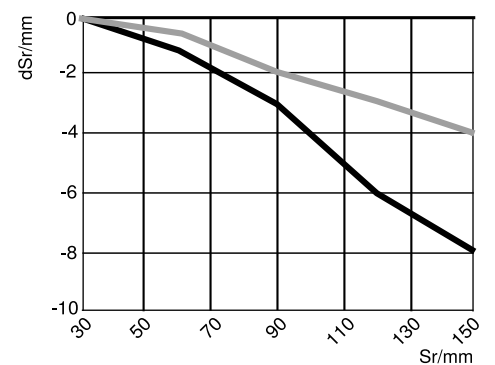

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

— grey 18 % remission

Reflex Sensor

with Background Suppression


80 mm

Range




- Adjustable switching distance
- Excellent ambient light suppression
- High switching frequency
- Large detection range



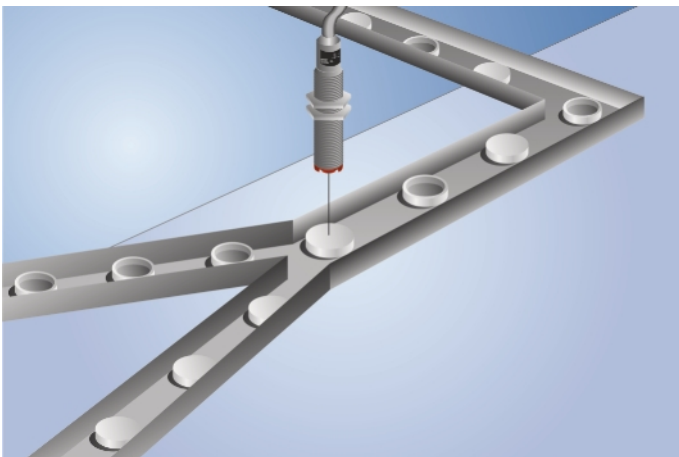

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance. Also these sensors don't influence each other if their light spots are pointed onto the same spot or against each other.

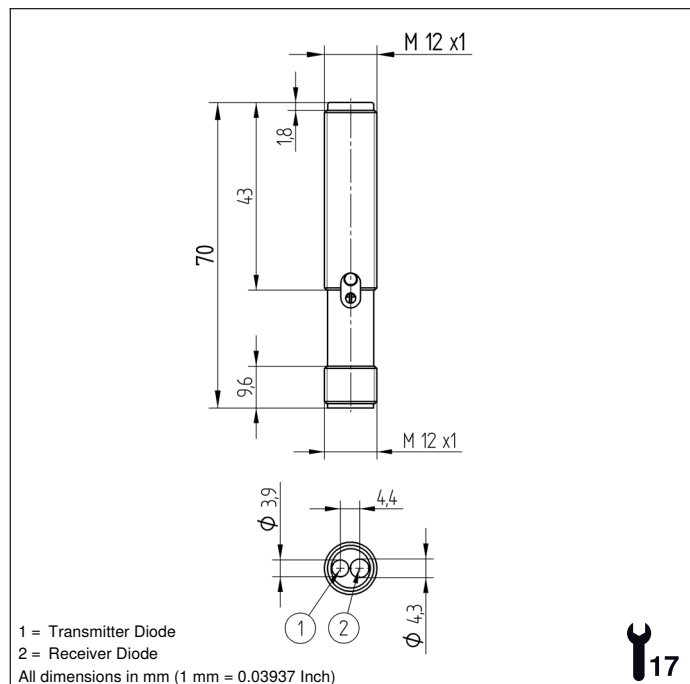

Technical Data

Optical Data	
Range	80 mm
Setting Range	25...80 mm
Switching Hysteresis	see Table 1
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 40 mA
Switching Frequency	1 kHz
Response Time	500 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	CuZn, nickel-plated
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin



Plug Version	
   	Part Number HO08PA3
PNP NC, PNP NO	●
Connection Diagram No.	101
Control Panel No.	O3
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	170

Connection Diagrams page 50 / System Components page 40

Table 1

Detection Range	40 mm	60 mm	80 mm
Light Spot Diameter	3 mm	5 mm	7 mm
Switching Hysteresis	< 2 mm	< 3 mm	< 8 mm

Complementary Products

PNP-NPN Converter BG2V1P-N-2M

Ctrl. Panel


O3



05 = Switching Distance Adjuster
 31 = Switching Status/Contamination-/Short Circuit Warning

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

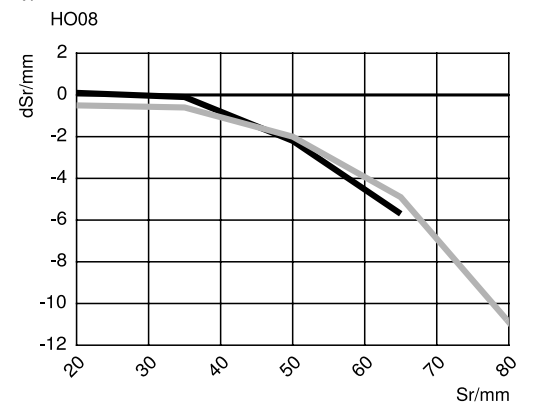

Sr = Switching Distance
 dSr = Switching Distance Change
 — black 6 % remission
 — grey 18 % remission


Fiber-optic amplifier



- Basic module
- Menu-driven settings
- Modular system – 12 add-on modules can be connected, ODX402P0099
- Mount for fiber optic cable adapter 3
- Recognition of transparent objects


Three wenglor fiber-optic cables are connected to these sensors. Up to 12 add-on modules can be connected to this basic module, making 15 fiber-optic cables available.

The graphic display guarantees easy, menu-driven sensor setup. Signal strengths and the switching threshold can be read from the display as numeric values or as a bar graph. Convenient programming and quick diagnosis is possible via the IO-Link interface.

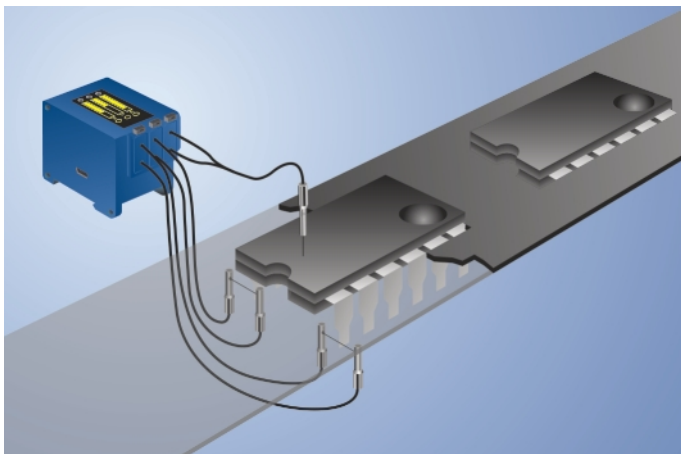



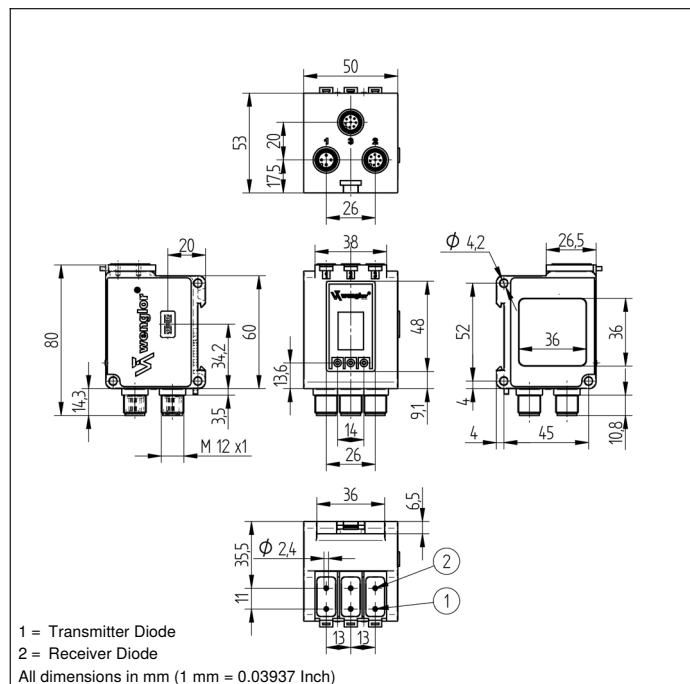


Technical Data

Optical Data	
Switching Hysteresis	< 15 %
Light Source	Red Light
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 70 mA
Switching Frequency	2 kHz
Response Time	250 μs
On-/Off-Delay	0...10000 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Teach Mode	NT, MT, ZT, DT, FT, HT, TP
Interface	IO-Link V1.0
IO-Link Parameter	> 12
Protection Class	III
Mechanical Data	
Setting Method	Menu (OLED)
Housing Material	Plastic
Degree of Protection	IP50
Connection	M12 × 1; 4+8-pin
DIN-Rail mounting	35 mm
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	347,83 a



Display brightness may decrease with age. This does not result in any impairment of the sensor function.

		Plug Version			
  		Part Number	ODX402P0088		
 					
Speed Measurement			●		
Selectable menu language			●		
Password Protection			●		
Logic Output			AND / OR		
Contamination Output			●		
IO-Link			●		
PNP NO			●		
Connection Diagram No.		773	775	776	
Control Panel No.		X2			
Suitable Connection Equipment No.		2	89		
Suitable Fiber-Optic Cable Adapter No.		003			


Connection Diagrams page 50 / System Components page 40

Complementary Products

- Add-on Module ODX402P0099
- Glass Fiber-Optic Cable
- IO-Link Master
- Plastic Fiber-Optic Cable
- Software

Ctrl. Panel

X2



- 20 = Enter key
- 22 = Up key
- 23 = Down key
- 60 = display

Retro-Reflex Sensor

Universal


7000 mm

Range




- Also suitable for glossy and reflective objects
- Condition monitoring
- High switching frequency
- IO-Link 1.1
- No blind spot from single-lens optics



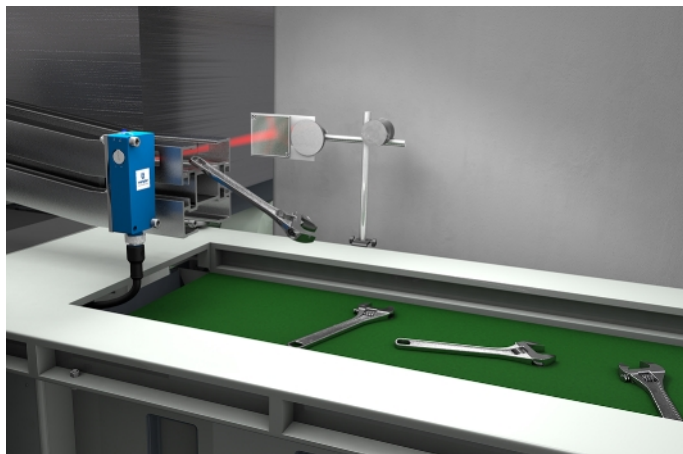

The retro-reflex sensor works with red light and a reflector. It also reliably detects objects with reflective or glossy surfaces at high speeds. Thanks to its great range, the sensor can, for example, be used to manage feed and presence controls as well as to detect objects on wide feed belts. The IO-Link interface can be used to configure retro-reflective barriers (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and signal values.

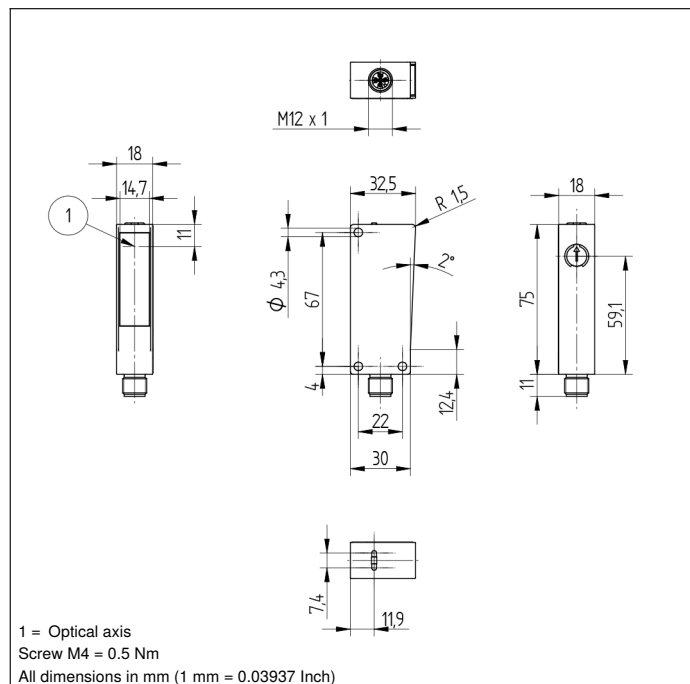

Technical Data

Optical Data	
Range	7000 mm
Reference Reflector/Reflector Foil	RQ100BA
Min. Distance to Reflector	0 mm
Smallest Recognizable Part	see Table 2
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	2000 Hz
Switching frequency (speed mode)	3500 Hz
Response Time	0,25 ms
Response time (speed mode)	0,14 ms
Temperature Drift	< 10 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2690,44 a



Plug Version	
   	Part Number PINL101
IO-Link	●
PNP NC, PNP NO	●
Connection Diagram No.	215
Control Panel No.	A28
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	350


Connection Diagrams page 50 / System Components page 40

Complementary Products

Dust Extraction Tube STAUBTUBUS-03
IO-Link Master
Reflector, Reflector Foil
Set Protective Housing Z1NS001
Software

Ctrl. Panel

A28



05 = Switching Distance Adjuster
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator

Table 1

Working Distance	1,5 m	3,5 m	7 m
Light Spot Diameter	60 mm	120 mm	250 mm

Table 2

Distance, Sensor to Reflector	1,5 m	3,5 m	7 m
Smallest Recognizable Part	10 mm	6 mm	15 mm

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...7 m	RR25KP	0...1,3 m
RE18040BA	0...5 m	RR21_M	0...1,4 m
RQ84BA	0...5,8 m	Z90R004	0,15...2,2 m
RR84BA	0...7 m	Z90R005	0,15...3,6 m
RE9538BA	0...2,5 m	ZRAE02B01	0...3,1 m
RE6151BM	0...5,2 m	ZRME01B01	0...0,9 m
RR50_A	0...5 m	ZRME03B01	0...3,2 m
RE6040BA	0...5,7 m	ZRMR02K01	0...1,1 m
RE8222BA	0...3,4 m	RF505	0...2,1 m
RR34_M	0...3 m	RF508	0...2,1 m
RE3220BM	0...2,5 m	RF258	0...1,8 m
RE6210BM	0...1,8 m	ZRDF03K01	0...4,5 m
RR25_M	0...2,2 m	ZRDF10K01	0...5,5 m

Retro-Reflex Sensor with light band


1600 mm LASER

Range




- Compensation of uneven conveyor belt areas with dynamic teach-in
- Dynamic readjustment of the switching threshold
- Flexible mounting options thanks to 180° rotatable plug
- Precise front edge detection with non-uniform objects



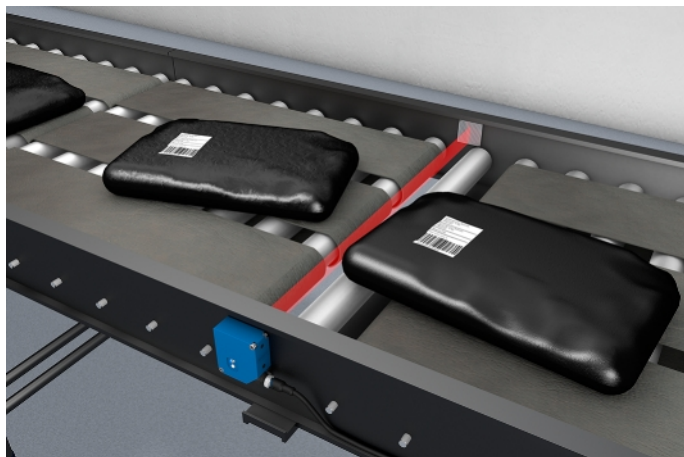



The Retro-Reflex Sensor with Light Band scans a significantly larger range than a retro-reflex sensor with a dot-shaped light spot. This makes it ideally suitable for reliably detecting the front edges of objects with irregular shapes or variable sizes. The sensor's collimated laser light band is absolutely homogeneous and can thus be precisely aligned to the conveyor belt's level. The sensor detects objects as small as just four millimeters. The compact format can be integrated into the smallest of spaces, for example in the side panels of conveyor systems.

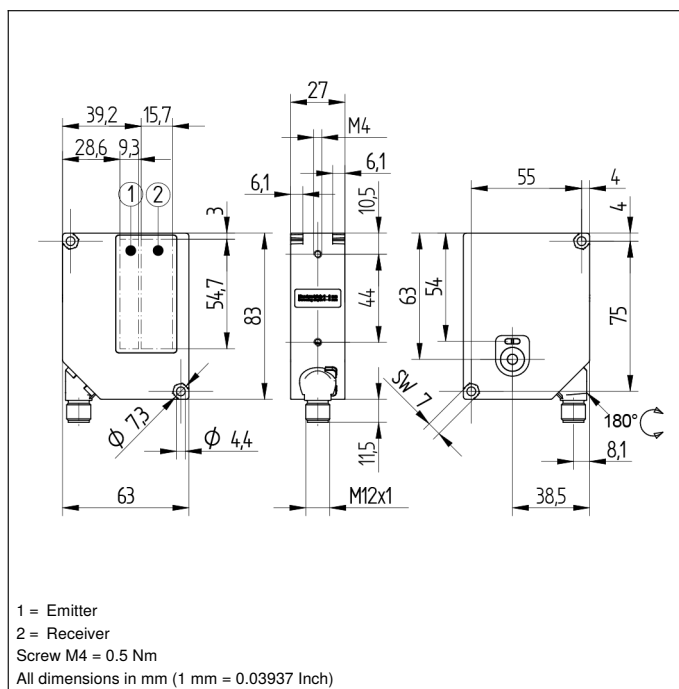

Technical Data

Optical Data	
Range	2500 mm
Reference Reflector/Reflector Foil	Z90R009
Smallest Recognizable Part	see Table
Light Source	Laser (red)
Wavelength	650 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Strip Height	54 mm
Electrical Data	
Supply Voltage	12...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	125 Hz
Response Time	4 ms
Temperature Range	-30...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1599,51 a



Plug Version	
     	Part Number
	P1EL300
PNP NO	●
Connection Diagram No.	150
Control Panel No.	1E1
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	112


Connection Diagrams page 50 / System Components page 40

Complementary Products

PNP-NPN Converter BG2V1P-N-2M

Ctrl. Panel

1E1



06 = Teach Button
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator

Table 1

Distance, Sensor to Reflector	0,40 ... 1,60 m	1,60 ... 2,50 m
Smallest Recognizable Part	4 mm	10 mm

Feasible reflector distance

Reflector type, mounting distance

Z90R009	0,4...2,5 m	ZRDF10K01	0,4...1,6 m
ZRDF03K01	0,4...1,6 m		



On the following pages you will find:

Ultrasonic Distance Sensors

30-31

Distance Sensor


30...400 mm

Range




- 2 mutually independent switching outputs
- Miniature design
- Ready for Industrie 4.0 with IO-Link version 1.1
- Reflex and through-beam operation mode are possible

These ultrasonic sensors evaluate the sound reflected from the object. They detect almost any object regardless of the material and its condition. They are therefore especially well suited for monitoring fill levels of liquids and bulk goods and for detecting transparent objects. The measured value can be read out via IO-Link, and the sensor can be optimally adapted to the application. The sensor can be used in reflex mode operation and as an ultrasonic through-beam sensor.

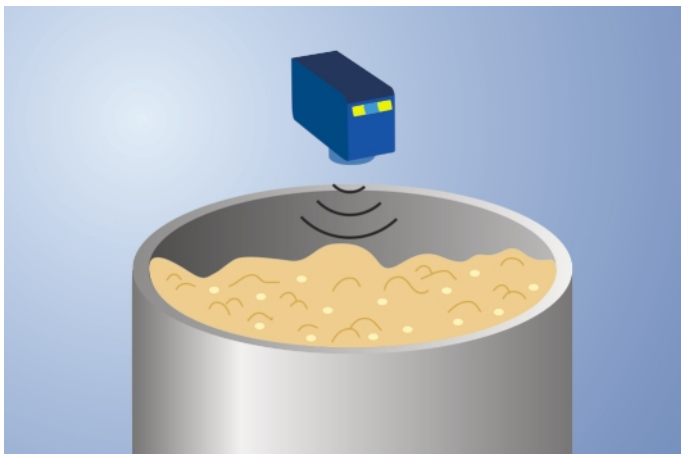



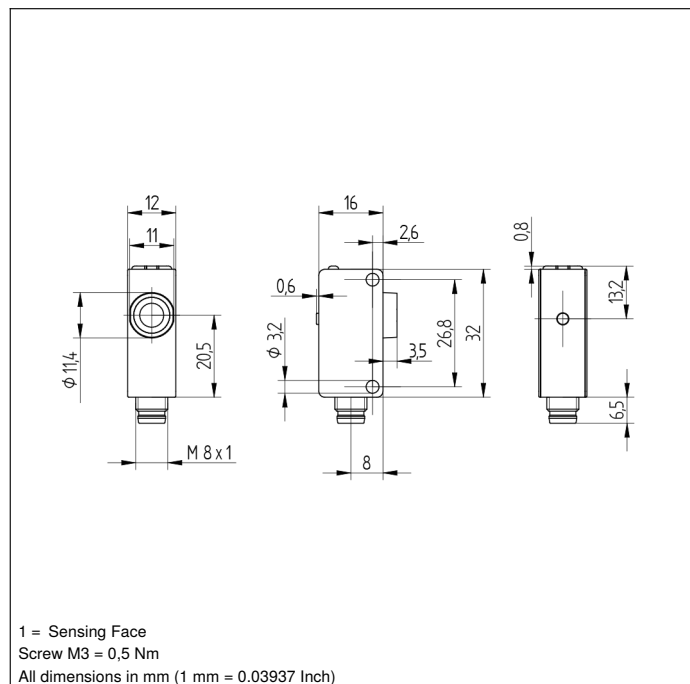


Technical Data

Ultrasonic Data	
Working range, reflex sensor	30...400 mm
Working range, through-beam sensor	1...800 mm
Setting Range	30...400 mm
Reproducibility maximum	4 mm
Linearity Deviation	4 mm
Resolution	0,5 mm
Ultrasonic Frequency	325 kHz
Opening Angle	< 12 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	2 mm
Switching Hysteresis	1 % *
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching frequency, reflex sensor	30 Hz
Switching frequency, through-beam sensor	70 Hz
Response time, reflex sensor	17 ms
Response time, through-beam sensor	8 ms
Temperature Range	-30...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Synchronous Mode	up to 40 sensors
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP68
Connection	M8 × 1; 4-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1106,71 a



* Referring to the switching distance, at least 2 mm.

		Plug Version	
  		Part Number	U1KT001
 			
PNP NO			●
Programmable error output			●
IO-Link			●
Connection Diagram No.		259	
Control Panel No.		A23	
Suitable Connection Equipment No.		7	
Suitable Mounting Technology No.		400	

Connection Diagrams page 50 / System Components page 40


Complementary Products

IO-Link Master

Software

Ctrl. Panel

A 23




06 = Teach Button
 5a = Switching Status Display, O1
 68 = supply voltage indicator
 6a = Switching Status Display, O2

Characteristic response curve

Characteristic curves show the position of the center of the measured object (100 × 100 mm plate) at the time of switching.

U1KT

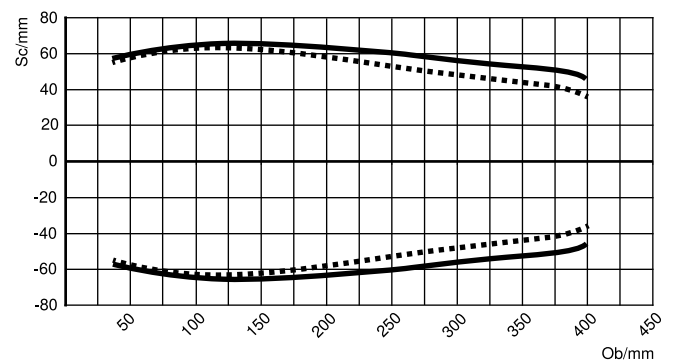

Ob = Object

Sc = Sonic cone width

— Standard

- - - Narrow



2D/3D Sensors

The 2D and 3D sensors by the wenglor subsidiary wenglor MEL GmbH are designed for two- and three-dimensional object detection. The company based in Eching near Munich is mainly known for its expertise in the field of 2D/3D profile sensors and for more than 35 years of experience in the field of measurement electronics as a successful supplier of high-tech products. wenglor MEL GmbH has been part of wenglor sensoric as an independent brand since 2013.

On the following pages you will find:

2D/3D Profile Sensors

34-35

2D/3D Profile Sensor

90...280 mm LASER

Range

weCat3D



- Compact, lightweight design – even suitable for robot applications
- Precise measuring range resolution X (> 1200 measuring points)
- Up to 3.6 million measuring points per second

2D/3D Profile Sensors project a laser line onto the object to be detected and generate an accurate, linearized height profile with an internal camera which is set up at a triangulation angle. Thanks to its uniform, open interface, the weCat3D series can be incorporated by means of the DLL program library or the GigE Vision standard without an additional control unit. Alternatively, wenglor offers its own software packages for implementing your application.



Technical Data

Optical Data

Working range Z	90...280 mm
Measuring range Z	190 mm
Measuring range X	62...145 mm
Linearity Deviation	95 µm
Resolution Z	9,4...49 µm
Resolution X	54...123 µm
Light Source	Laser (red)
Wavelength	660 nm
Laser Class (EN 60825-1)	2M

Environmental conditions


Ambient temperature	0...45 °C
Storage temperature	-20...70 °C
Max. Ambient Light	5000 Lux
EMC	DIN EN 61000-6-2; 61000-6-4
Shock resistance per DIN IEC 68-2-27	30 g / 11 ms
Vibration resistance per DIN IEC 60068-2-6	6 g (10...55 Hz)






Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	300 mA
Measuring Rate	200...4000 /s
Subsampling	800...4000 /s
Inputs/Outputs	4
Switching Output Voltage Drop	< 1,5 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	Ethernet TCP/IP
Baud Rate	100/1000 Mbit/s
Protection Class	III
FDA Accession Number	1610450-003

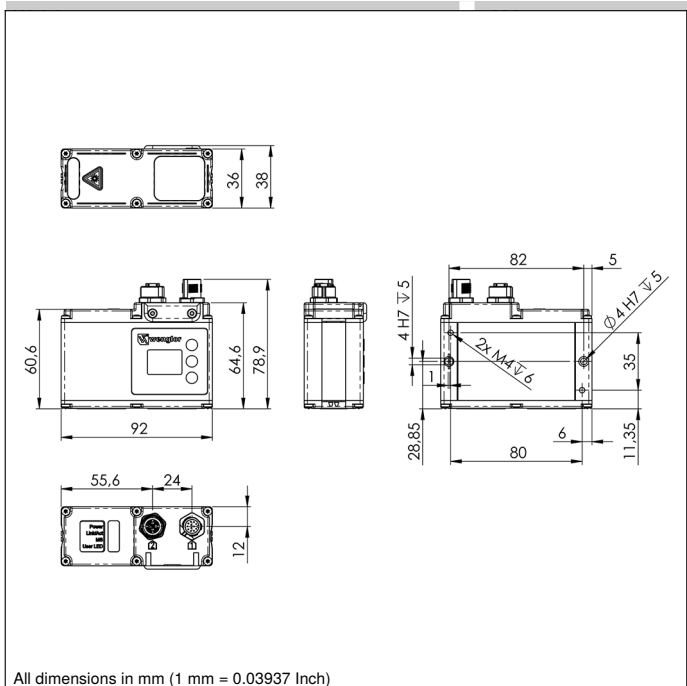Mechanical Data

Housing Material	Aluminium; Plastic
Degree of Protection	IP67
Connection	M12 × 1; 12-pin
Type of Connection Ethernet	M12 × 1; 8-pin, X-cod.
Optic Cover	Plastic



		Plug Version	
  		Part Number	MLSL123
 			
Web server		yes	
Push-Pull		●	
Connection Diagram No.		1022	1034
Control Panel No.		X2	A22
Suitable Connection Equipment No.		50	87
Suitable Mounting Technology No.		343	


Connection Diagrams page 50 / System Components page 40

Complementary Products


- Control Unit
- Cooling Unit ZLSK001
- Protective Housing ZLSS003
- Protective Screen Retainer ZLSS001
- Software
- Switch EHSS001

Ctrl. Panel

A22




X2




- 20 = Enter key
- 22 = Up key
- 23 = Down key
- 4a = User LED
- 60 = display
- 68 = supply voltage indicator
- 78 = Module status
- 85 = Link/Act LED

Measuring field X, Z

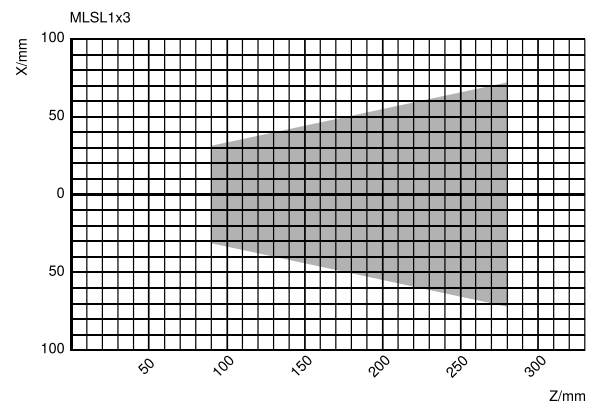

Z = Working distance
 X = Measuring Range

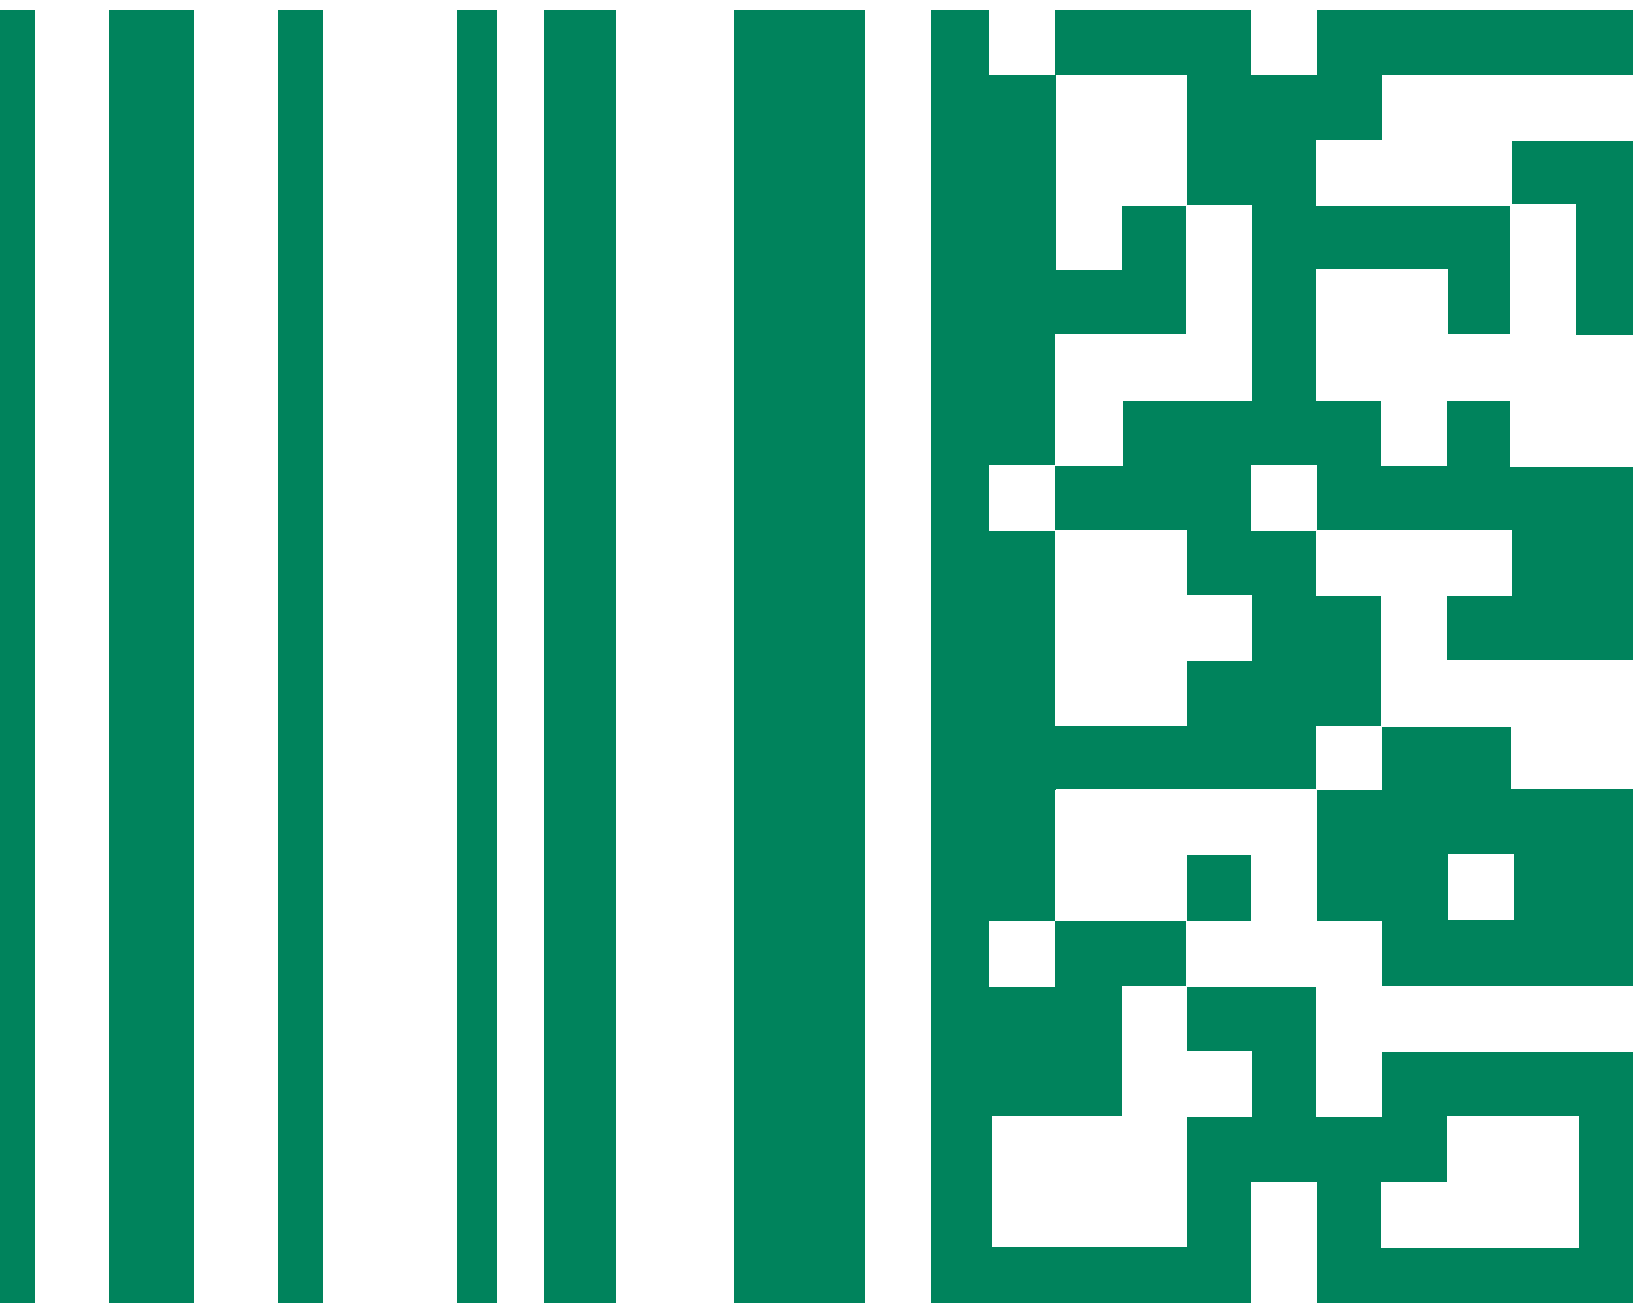

On the following pages you will find:

1D/2D Code Scanners

38-39

1D/2D Code Scanner

50...300 mm

Range

IndustrialEthernet



- Auto-button function
- DPM
- Integrated code reconstruction
- Integrated LED illumination
- PROFINET and EtherNet/IP™
- Web link


These 2D code scanners are suitable for omnidirectional scanning of 1D and 2D codes.

The following code types can be processed:

1D codes: Code39, Code93, Code128, UPC/EAN, BC412, Interleaved 2 of 5, Codabar, Postal Codes, Pharmacode


2D codes: DataMatrix ECC 0...200, PDF417, Micro PDF417, QR-Code, Micro QR-Code, Aztec Code, GS1 Databar, Dot code



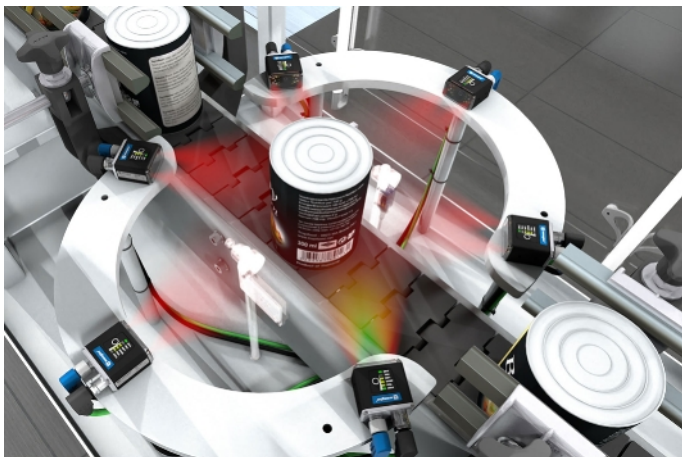


Additional code types upon request.

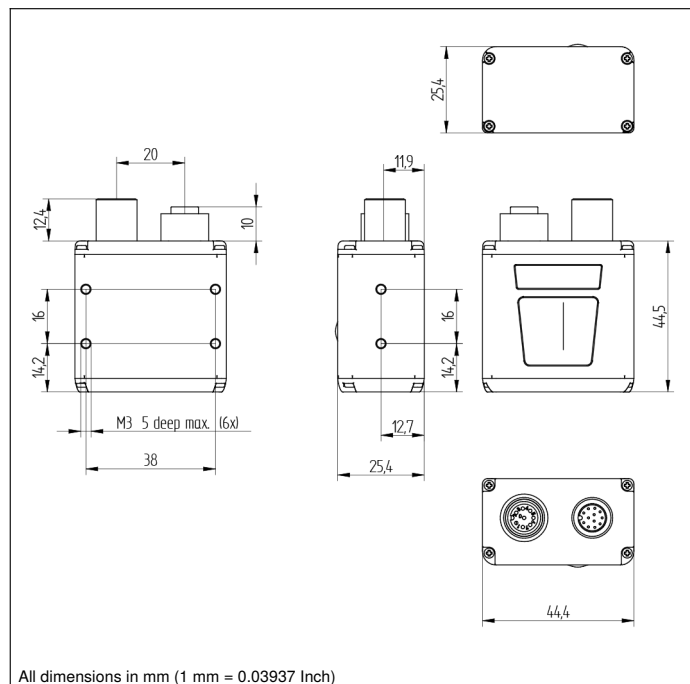

Technical Data

Optical Data	
Read Range	50...300 mm
Light Source	Red Light
Wavelength	617 nm
Focus	Autofocus
Electrical Data	
Supply Voltage	5...30 V DC
Current Consumption (U _b = 24 V)	180 mA
Temperature Range	0...45 °C
Switching Output	Optoisolator
Number of Switching Outputs	3
Switching Output/Switching Current	< 100 mA
Reverse Polarity Protection	yes
Interface	RS-232/Ethernet
Trigger Input	Optoisolator
Signal Input	Optoisolator
Number of Signal Inputs	3
Mechanical Data	
Setting Method	Ethernet
Housing Material	Metal
Weight	68 g
Degree of Protection	IP65/IP67
Connection	M12 × 1; 12-pin
Type of Connection Ethernet	M12 × 1; 8-pin




	Plug Version	
	C5PC103	C5PC211
  	Part Number	
 		
PNP NO/NC switchable	●	●
NPN NO/NC switchable	●	●
Ethernet	●	●
PROFINET-I/O, CC-B	●	●
EtherNet/IP™	●	●
Barcode Density	Standard density	High density
Resolution	752 × 480 Pixel	1280 × 960 Pixel
min. Resolution	> 0,191 mm	> 0,064 mm
Scan Rate	60 scans/sec	42 scans/sec
Connection Table No.	39	39
Control Panel No.	A24	A24
Suitable Connection Equipment No.	87	87
Suitable Mounting Technology No.	430	430

System Components page 40

Distance	Max.Field of View	Min.Resolution	Read Range	
			1D	2D
50 mm	51 × 33 mm	0,191 mm	50...64 mm	50 mm
100 mm	97 × 62 mm	0,254 mm	50...81 mm	50...64 mm
150 mm	142 × 90 mm	0,381 mm	50...133 mm	50...102 mm
200 mm	187 × 119 mm	0,508 mm	50...190 mm	50...133 mm
250 mm	232 × 148 mm	0,762 mm	50...300 mm	50...190 mm
300 mm	277 × 177 mm	1,016 mm	50...400 mm	50...300 mm

Ctrl. Panel


A24



03 = Error Indicator 50 = Good Read
 06 = Teach Button 68 = supply voltage indicator
 36 = Mode Indicator 70 = Run/Trigger
 48 = Network Status

Complementary Products

Connection Cable ZCYV00x
 Connection cable ZDCG005
 Path-Folding Mirror ZNNG028
 Protective Housing ZSV-0x-01
 Software
 ZNNG053 Replacement disc
 ZNNG054 Optical diffuser
 ZNNG055 Polarization filter
 ZNNG056 ESD protective screen
 ZNNG057 YAG filter

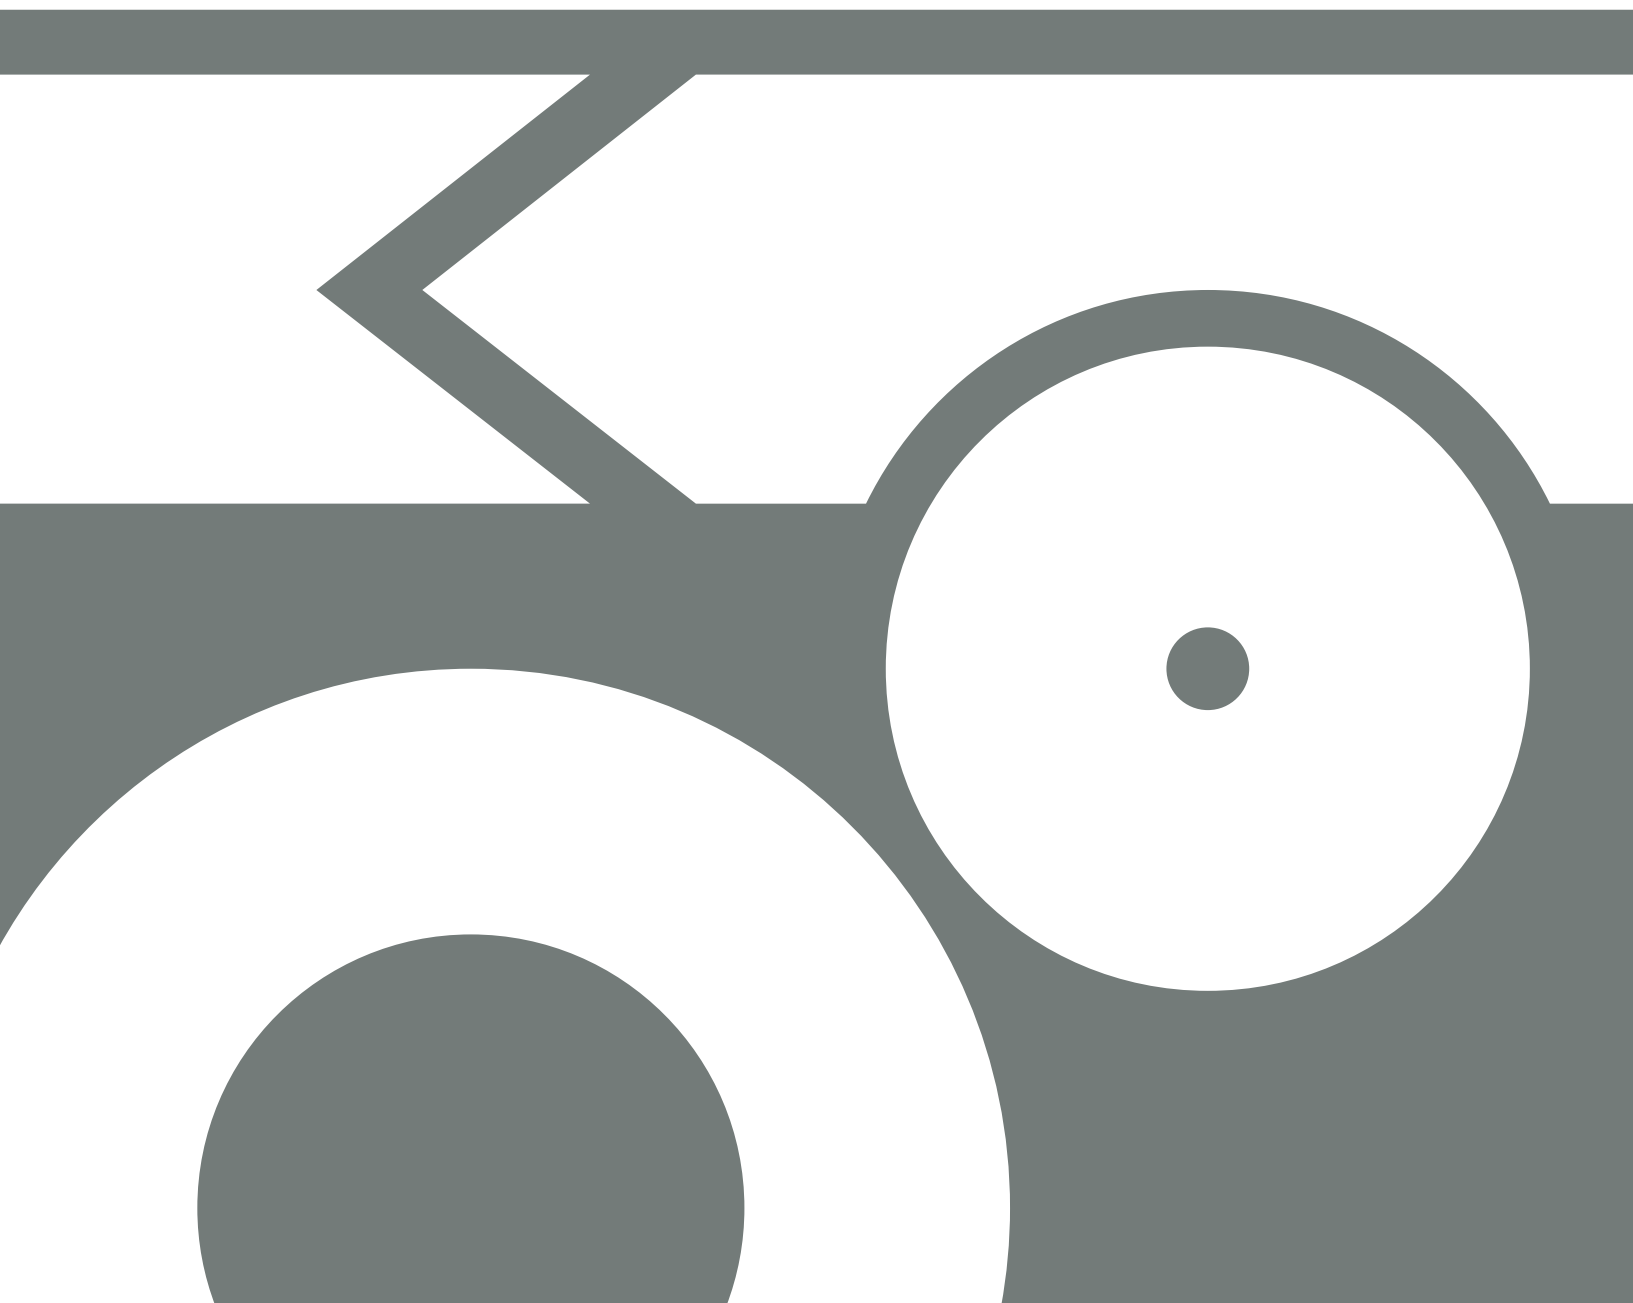

System Components

In this chapter you will find the correct components not only to mount and connect wenglor products but to also integrate them into automation processes.

On the following pages you will find:

Mounting Technology	42-46
Reflectors and Reflector Foils	47
Connection Equipment and Connection Boxes	48-49

Mounting

for 32 × 16 × 12 mm (1K)/reflector foil

Mounting for M12 × 1

Part Number W12S12AL

Mechanical Data


Material Mounting Head	Aluminum
Material Mounting Plate	Stainless Steel V2A
for Round Profile Diameter	8...13 mm

Packaging unit 1 Piece

Suitable Mounting Technology No. **550**



170

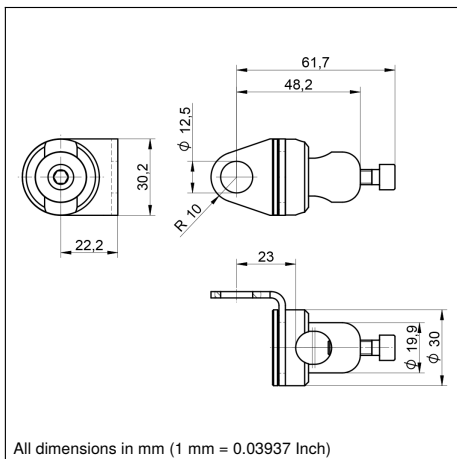

All dimensions in mm (1 mm = 0.03937 Inch)

Mounting for M8 × 1

Part Number W8S12AL

Mechanical Data


Material Mounting Head	Aluminum
Material Mounting Plate	Stainless Steel V2A
for Round Profile Diameter	8...13 mm

Packaging unit 1 Piece

Suitable Mounting Technology No. **550**



200

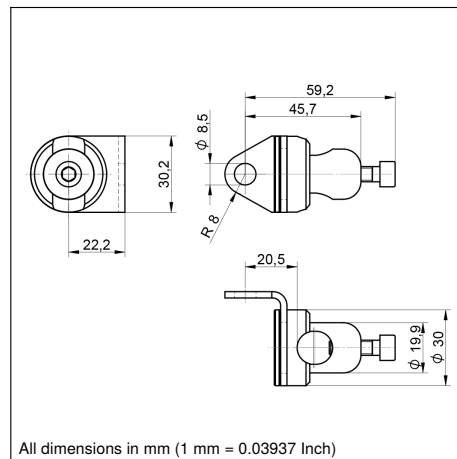

All dimensions in mm (1 mm = 0.03937 Inch)

Mounting for 76 × 32,5 × 18 mm (N)

Part Number WNS12AL

Mechanical Data


Material Mounting Head	Aluminum
Material Mounting Plate	Stainless Steel V2A
for Round Profile Diameter	8...12,5 mm

Packaging unit 1 Piece

Suitable Mounting Technology No. **550**



350

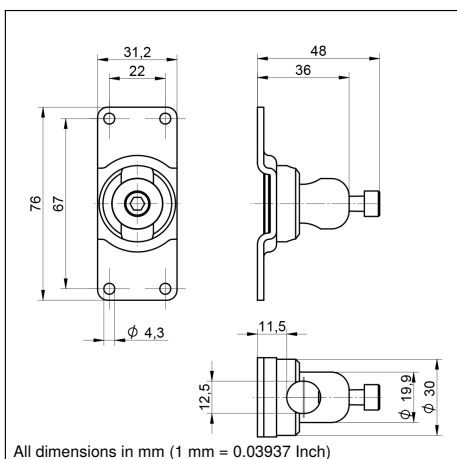

All dimensions in mm (1 mm = 0.03937 Inch)

Mounting for 50 × 50 × 20...30 mm (P)

Part Number WPS12AL

Mechanical Data


Material Mounting Head	Aluminum
Material Mounting Plate	Stainless Steel V2A
for Round Profile Diameter	8...12,5 mm

Packaging unit 1 Piece

Suitable Mounting Technology No. **550**



380

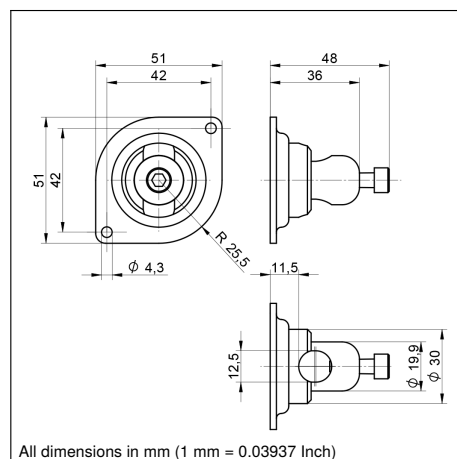

All dimensions in mm (1 mm = 0.03937 Inch)

Mounting for 32 × 16 × 12 mm (1K)/reflector foil

Mounting for 32 × 16/22 × 12 mm (K/1K)

Part Number WKS12AL

Mechanical Data


Material Mounting Head	Aluminum
Material Mounting Plate for Round Profile Diameter	Stainless Steel V2A
Packaging unit	1 Piece

Suitable Mounting Technology No.

550



400

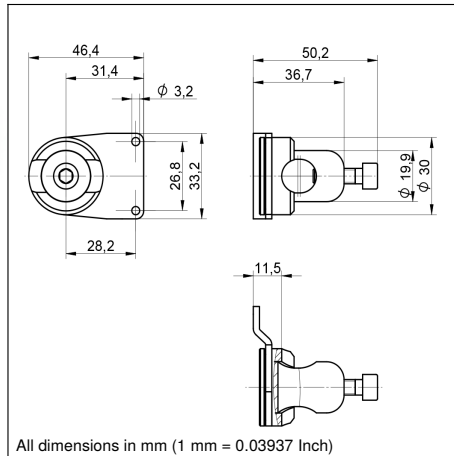

All dimensions in mm (1 mm = 0.03937 Inch)

Mounting Bracket

Mounting Bracket for 83 × 63 × 27 mm (1E)


Part Number Z1EX003

Mechanical Data

Material	Stainless Steel
Scope of delivery	BEF-SET-21
Packaging unit	1 Piece



112

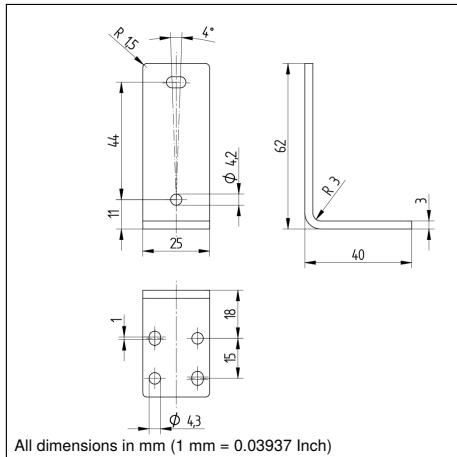

Mounting Bracket for 32 × 16/22 × 12 mm (K/1K)


Part Number WK

Mechanical Data

Material	Steel Plate, nickel-plated
Packaging unit	1 Piece



400

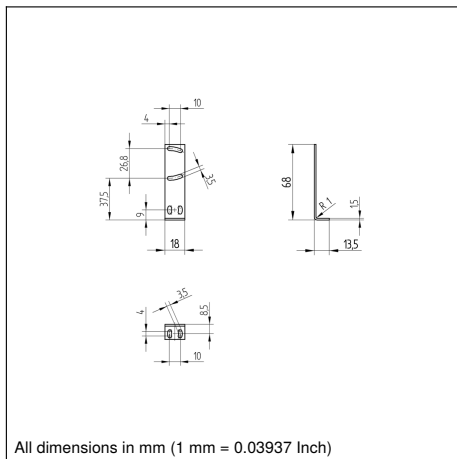

Mounting Bracket for 76 × 32,5 × 18 mm (N)


Part Number WN

Mechanical Data

Material	Steel Plate, nickel-plated
Packaging unit	1 Piece



350

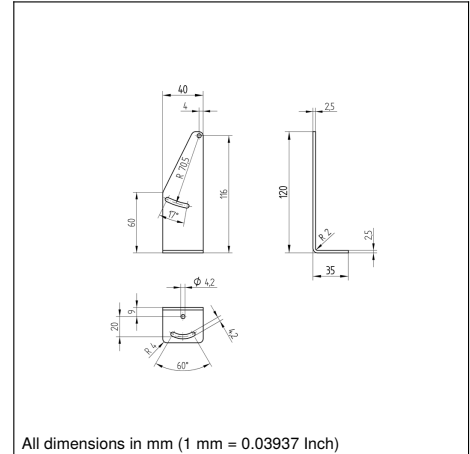

Mounting Bracket for 50 × 50 × 20...30 mm (P)


Part Number WP

Mechanical Data

Material	Steel Plate, nickel-plated
Packaging unit	1 Piece



380

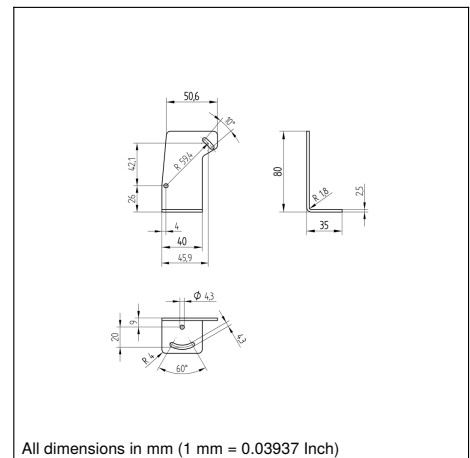

Mounting Clamp


Mounting Clamp for M12 × 1
Part Number BSM12B

Mechanical Data

Material	Plastic
Mounting	flush
Packaging unit	1 Piece



170

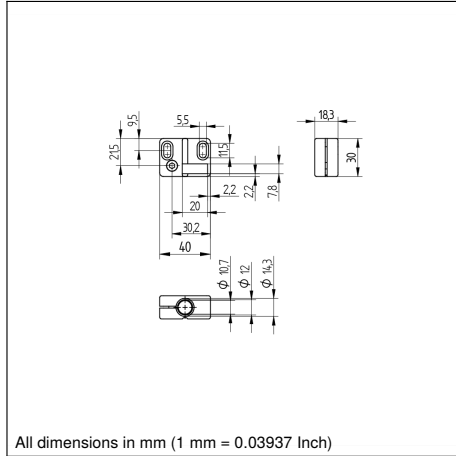


Mounting Clamp for M12 × 1
Part Number BSM12NB

Mechanical Data

Material	Plastic
Packaging unit	1 Piece



170

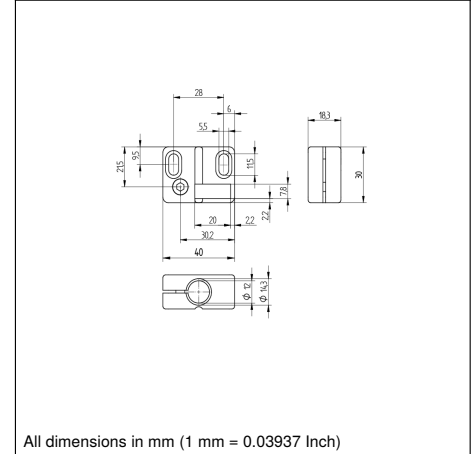


Mounting Clamp for M5 × 0,5
Part Number BSM5NB

Mechanical Data

Material	Plastic
Packaging unit	1 Piece



260

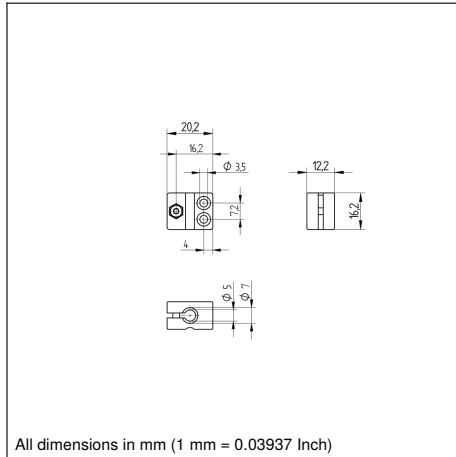


Mounting Clamp for M8 × 1
Part Number BSM8NB

Mechanical Data

Material	Plastic PA
Packaging unit	1 Piece



200

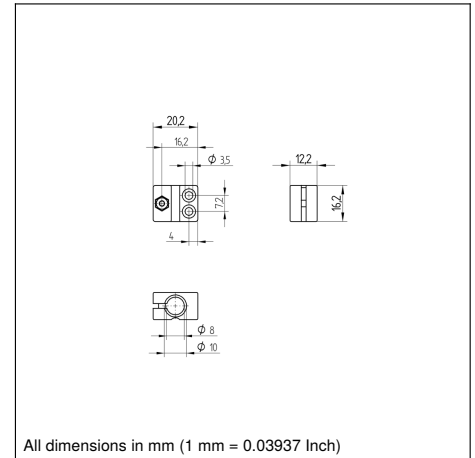


Mounting Console with Fixed Limit Stop

Mounting Console with Fixed Limit Stop for M8 × 1; Flush Mounting

Part Number Z08M001

Mechanical Data

Material	Stainless Steel; Plastic
Threaded sleeve tightening torque	max. 2 Nm
Clamp retainer tightening torque	0,3 Nm
Packaging unit	1 Piece

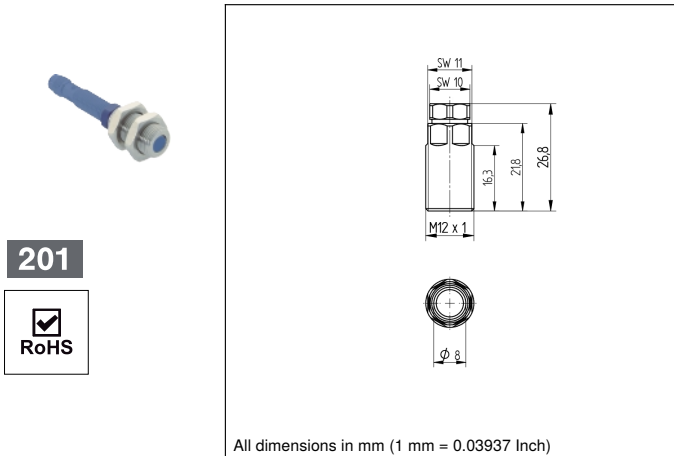


Mounting Console with Fixed Limit Stop for M8 × 1; Semi-Flush Mounting

Part Number Z08M002

Mechanical Data

Material	Stainless Steel; Plastic
Threaded sleeve tightening torque	max. 2 Nm
Clamp retainer tightening torque	0,3 Nm
Packaging unit	1 Piece

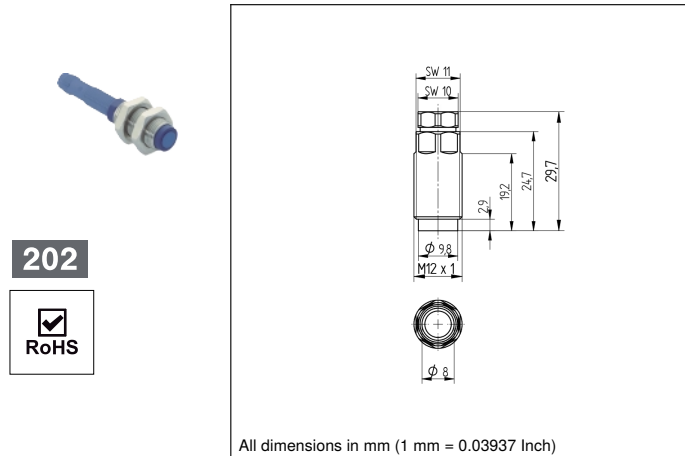


Mounting Console with Fixed Limit Stop for M8 × 1; Non-Flush Mounting

Part Number Z08M003

Mechanical Data


Material	Stainless Steel; Plastic
Threaded sleeve tightening torque	max. 2 Nm
Clamp retainer tightening torque	0,3 Nm
Packaging unit	1 Piece

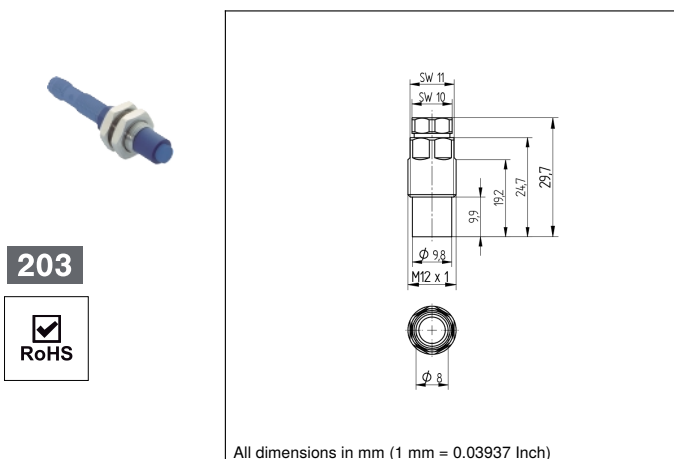

Reflector
Part Number Z90R009

Mechanical Data

Structure	Continuous Structure
Mounting Type	Fixing Holes
Orientation with respect to the sensor	vertical
Material	Plastic
Temperature Range	-30...60 °C
Packaging unit	1 Piece

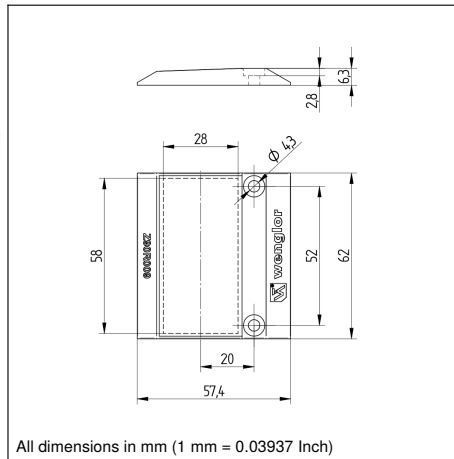


Reflector 60 × 41 × 8 mm
Part Number RE6040BA

Mechanical Data

Structure	Macro Structure
Mounting Type	Fixing Holes
Material	Plastic
Degree of Protection	IP67
Temperature Range	-40...65 °C
Packaging unit	1 Piece

Suitable Mounting Technology No.

390

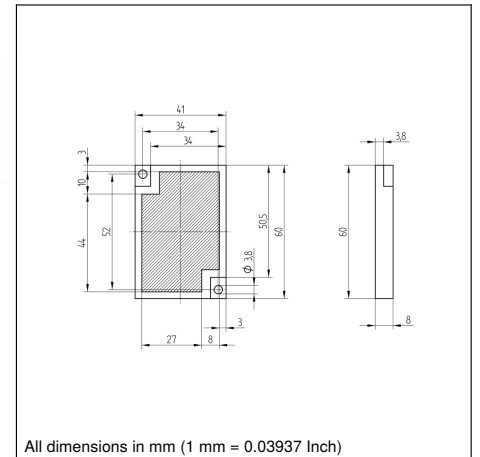

Connection Line

Connection Line M12 × 1; 4-pin Part Number S23-2M

Electrical Data

Supply Voltage ≤ 250 V AC/DC

Mechanical Data

Connection 1 Socket, straight

Connection mode 1 M12 × 1, 4-pin

Connection 2 stripped

Torque M12: 0,6 Nm

Cable Length 2 m

Outer diameter (d) 5 mm

Wire cross-section 0,34 mm²

Degree of Protection IP67

Temperature range (fixed installation) -30...80 °C

Temperature range (moving application) -5...80 °C


Cable Jacket Material PVC

Material Wire Insulation PVC

Material Sleeve Nut CuZn, nickel-plated

Packaging unit 1 Piece

* Per terminal

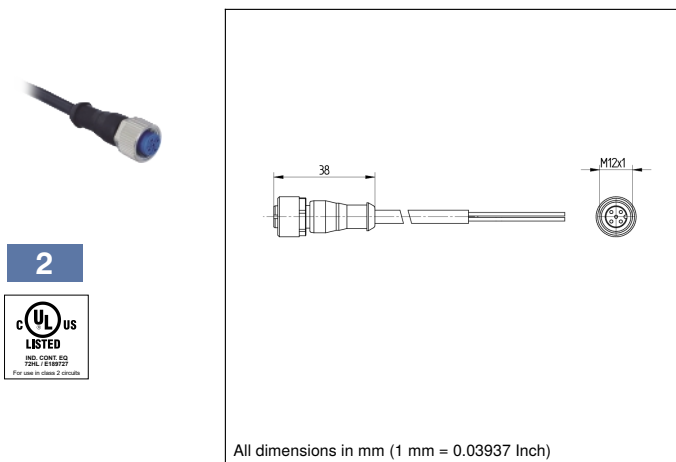

Connection Line M8 × 1; 4-pin Part Number S61-2M

Electrical Data

Supply Voltage ≤ 50 V AC/DC

Mechanical Data

Connection 1 Socket, straight

Connection mode 1 M8 × 1, 4-pin

Connection 2 stripped

Torque M8: 0,4 Nm

Cable Length 2 m

Outer diameter (d) 4,8 mm

Wire cross-section 0,25 mm²

Degree of Protection IP67

Temperature range (fixed installation) -25...80 °C

Temperature range (moving application) -5...80 °C


Cable Jacket Material PVC

Material Wire Insulation PVC

Material Sleeve Nut CuZn, nickel-plated

Packaging unit 1 Piece

* Per terminal

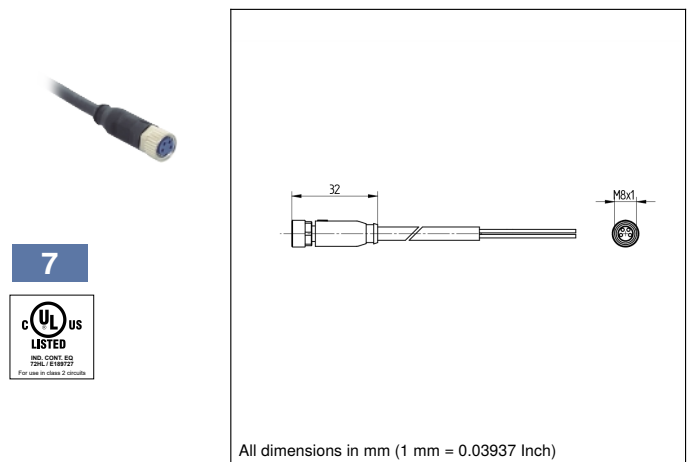

Connection Line M8 × 1; 3-pin Part Number S49-2M

Electrical Data

Supply Voltage ≤ 63 V AC/DC

Mechanical Data


Connection 1	Socket, straight
Connection mode 1	M8 × 1, 3-pin
Connection 2	stripped
Torque	M8: 0,3 Nm
Cable Length	2 m
Outer diameter (d)	5 mm
Wire cross-section	0,34 mm ²
Degree of Protection	IP67
Temperature Range	-25...80 °C
Cable Jacket Material	PVC
Material Wire Insulation	PVC
Material Sleeve Nut	CuZn, nickel-plated

Packaging unit 1 Piece

* Per terminal



8

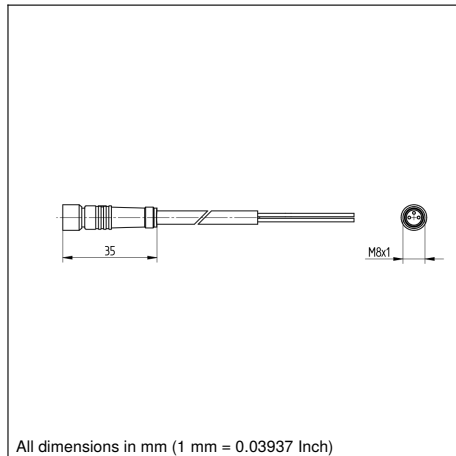

All dimensions in mm (1 mm = 0.03937 Inch)

Connection Line M12 × 1; 8-pin Part Number S80-2M

Electrical Data

Supply Voltage ≤ 36 V AC/DC

Mechanical Data


Connection 1	Socket, straight
Connection mode 1	M12 × 1, 8-pin
Connection 2	stripped
Torque	M12: 0,5 Nm
Cable Length	2 m
Outer diameter (d)	6 mm
Wire cross-section	0,25 mm ²
Degree of Protection	IP67
Temperature Range	-25...80 °C
Cable Jacket Material	PUR
Material Wire Insulation	PP
Material Sleeve Nut	CuZn, nickel-plated
Screened	yes
Halogen-free	yes
Drag Chain Suitable	yes
Bending radius (fixed installation)	> 5 × d
Bending radius (used in motion)	> 10 × d
Travel speed (with 5 m horizontal travel distance)	≤ 3,3 m/s
Acceleration	≤ 5 m/s ²
Bending cycles	> 2000000

Packaging unit 1 Piece

* Per terminal












80






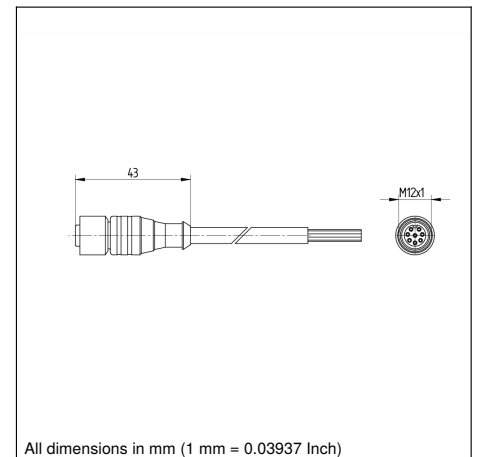


All dimensions in mm (1 mm = 0.03937 Inch)

Connection Diagrams

Legend					
+	Supply Voltage +	nc	Not connected	EN _{RS422}	Encoder B/ \bar{B} (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	\bar{U}	Test Input inverted	EN _b	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
\bar{A}	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	Aok	Digital output OK
\bar{V}	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	\equiv	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
EN _{0RS422}	Encoder 0-pulse 0/ $\bar{0}$ (TTL)	EDM	Contacting Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	EN _{ARS422}	Encoder A/ \bar{A} (TTL)		

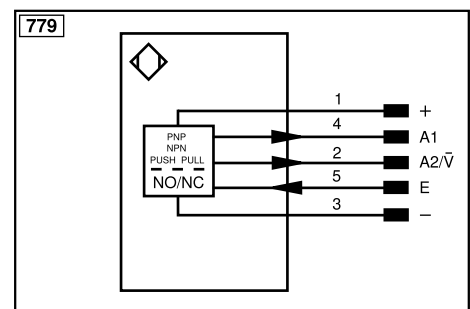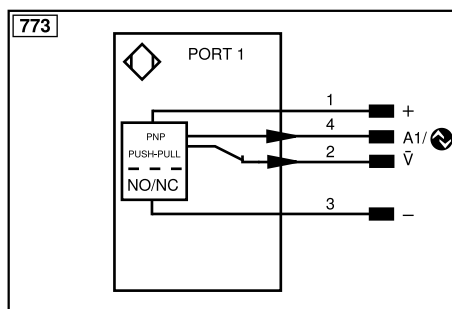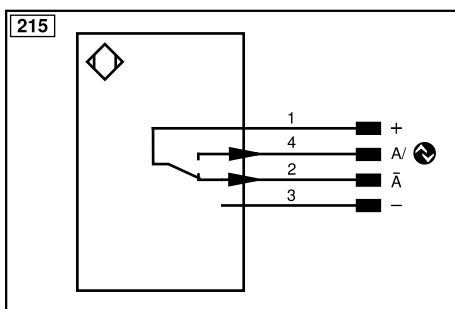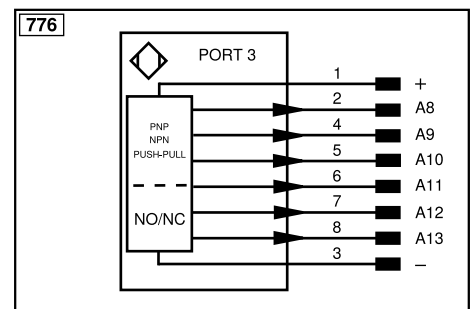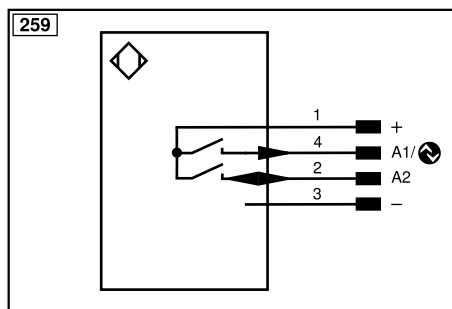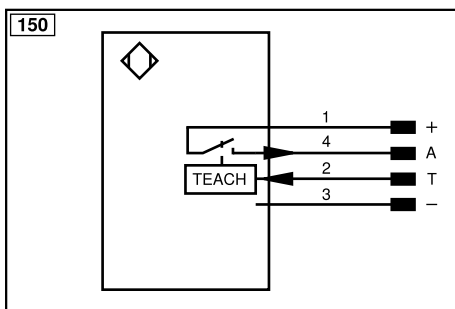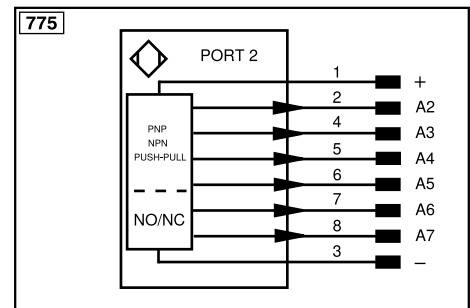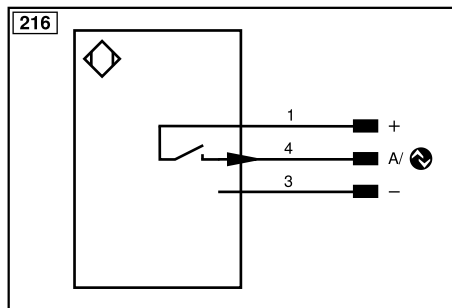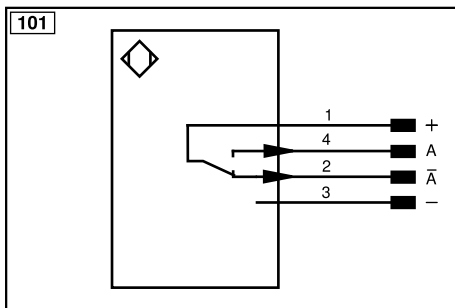

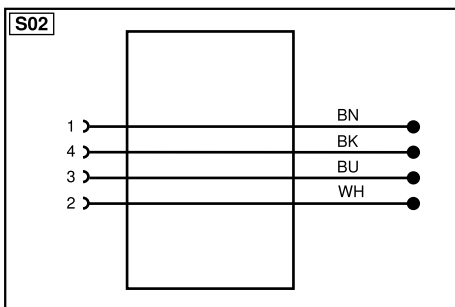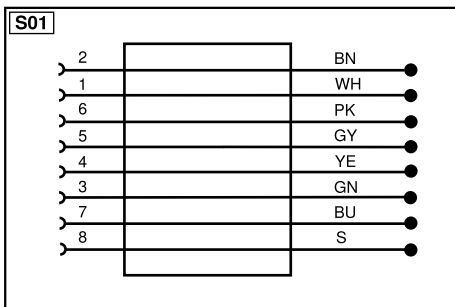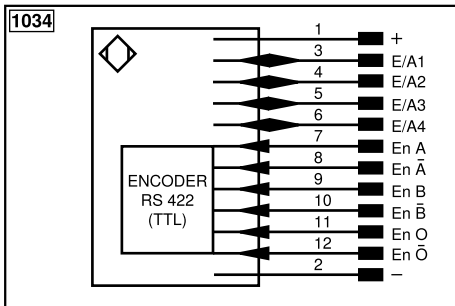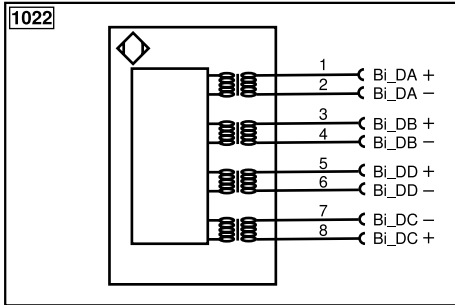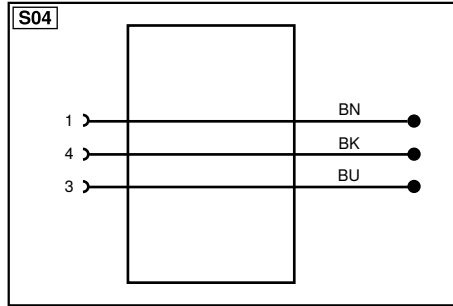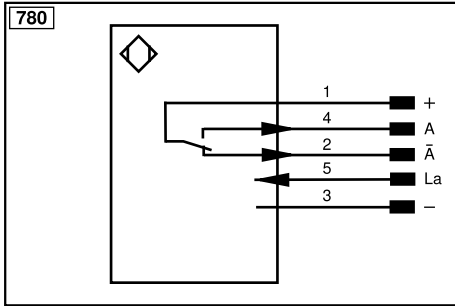

Index

alphabetical

Part Number		Page
BSM12B	Mounting Clamp	45
BSM12NB	Mounting Clamp	45
BSM5NB	Mounting Clamp	45
BSM8NB	Mounting Clamp	45
C5PC103	1D/2D Code Scanner	39
C5PC211	1D/2D Code Scanner	39
HO08PA3	Reflex Sensor	21
MLSL123	2D/3D Profile Sensor	35
OCP662X0135	Laser Distance Sensor	15
ODX402P0088	Fiber-optic amplifier	23
OY2P303A0135	Laser Distance Sensor	13
P1EL300	Retro-Reflex Sensor	27
P1KH004	Reflex Sensor	19
P1KH006	Reflex Sensor	17
P1KH019	Reflex Sensor	19
P1KY001	Laser Distance Sensor	11
P1NL101	Retro-Reflex Sensor	25
RE6040BA	Reflector	47
S23-2M	Connection Line	48
S49-2M	Connection Line	49
S61-2M	Connection Line	48
S80-2M	Connection Line	49
U1KT001	Distance Sensor	31
W12S12AL	Mounting	42
W8S12AL	Mounting	42
WK	Mounting Bracket	44
WKS12AL	Mounting	43
WN	Mounting Bracket	44
WNS12AL	Mounting	42
WP	Mounting Bracket	44
WPS12AL	Mounting	42
Z08M001	Mounting Console with Fixed Limit Stop	46
Z08M002	Mounting Console with Fixed Limit Stop	46
Z08M003	Mounting Console with Fixed Limit Stop	46
Z1EX003	Mounting Bracket	44
Z90R009	Reflector	47

Dear Ladies and Gentlemen,

In these official regulations of Brose Fahrzeugteile SE & Co. KG you will find the approved sensors of the company wenglor sensoric GmbH.

This approved material list contains all the necessary technical data and drawings.

It will help to find the right sensor for your application.

You can download all our drawings in 2D and 3D format from the Internet at www.wenglor.com. We will be happy to answer any further questions you may have.

Best regards,



Patrick Junker
Key Account Manager
wenglor sensoric GmbH

Change History

Year	Added	Removed	Notice	
2021	HO08PA3 I08H001 I08H002 I08H003 I08H004 I08H005 I08H006 I08H007 I08H008 I08H009 I08H010 I08H011 I08H012 I08H013 I08H014 I08H015 I08H016 I08H017 I08H018 I08H019 I08H020 I08H021 I08H022 I08H023 I08H024 I08H025 I08H026 I08H027 I08H028 I08H029 I08H030 I08H031 I08H032 I08H034 I08H035 I08H037 I08H047 I08H048 I08H049 I08H051 I08H052 I08H053 I08H054 I08H055 I08H056 I08H057 I08H058 I08H059 I08H060 I08H061 I08H062 I08H063 I08H064 I08H065 I08H066 I08H067	I12A001 I12H001 I12H002 I12H003 I12H004 I12H005 I12H006 I12H007 I12H008 I12H009 I12H010 I12H011 I12H012 I12H013 I12H014 I12H015 I12H016 I12H017 I12H018 I12H019 I12H020 I12H022 I12H023 I12H024 I12H025 I12H026 I12H027 I12H028 I12H032 I12H040 I12H043 I12H044 I12H045 I12H046 I12H047 I12H048 I12H049 I12H050 I12H051 I12H052 I12H053 I12H054 I12H055 I12H056 I12H057 I12H058 I12H059 I12H060 I12H062 I12N001 I12N002 MLSL123 OCP662X0135 ODX402P0088 OY2P303A0135	P1EL300 P1KH006 P1KH019 P1KY001 P1NL101 U1KT001 S49-2M S61-2M S23-2M S80-2M Z90R009 RE6040BA Z08M001 Z08M002 Z08M003 WN WP WK Z1EX003 WPS12AL WKS12AL WNS12AL W8S12AL W12S12AL BSM5NB BSM12B BSM12NB BSM8NB	New admission wenglor