


P1HJ1xx

Fork Sensor Miniature Design

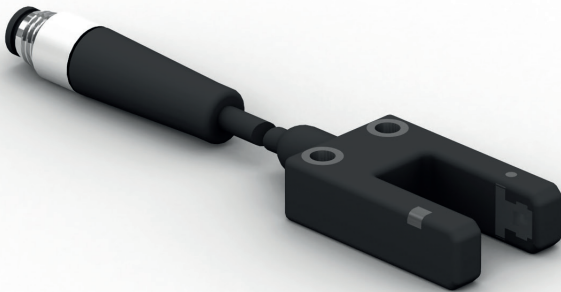

Operating Instructions

Table of Contents

- 1. General 3**
 - 1.1 Information Concerning these Instructions3
 - 1.2 Explanations of Symbols3
 - 1.3 Limitation of Liability.....4
 - 1.4 Copyrights4
- 2. For Your Safety 5**
 - 2.1 Use for Intended Purpose5
 - 2.2 Use for Other than the Intended Purpose.....5
 - 2.3 Personnel Qualifications6
 - 2.4 Modification of Products6
 - 2.5 General Safety Precautions6
 - 2.6 Laser/LED Warnings.....6
 - 2.7 Approvals and protection class6
- 3. Technical Data 7**
 - 3.1 Technical Data7
 - 3.1.1 Spot diameter9
 - 3.1.2 Smallest detectable part.....9
 - 3.1.3 Switching distance10
 - 3.2 Complementary Products11
 - 3.3 Layout.....11
 - 3.4 Control Panel.....12
 - 3.5 Scope of Delivery12
- 4. Transport and Storage 13**
 - 4.1 Transport13
 - 4.2 Storage13
- 5. Installation and Electrical Connection 13**
 - 5.1 Installation13
 - 5.2 Electrical Connection14
 - 5.3 Diagnostics.....15
- 6. Settings..... 16**
- 7. IO-Link 16**
- 8. Maintenance Instructions 17**
- 9. Proper Disposal 17**
- 10. Appendix..... 17**
 - 10.1 List of Abbreviations.....17
 - 10.2 Change Index, Operating Instructions.....17
 - 10.3 EU Declaration of Conformity17

1. General

1.1 Information Concerning these Instructions

- These instructions apply to the product with ID code P1HJ1xx.
- They make it possible to use the product safely and efficiently.
- These instructions are an integral part of the product and must be kept on hand for the entire duration of its service life.
- Local accident prevention regulations and national work safety regulations must be complied with as well.
- The product is subject to further technical development, and thus the information contained in these operating instructions may also be subject to change. The current version can be found at www.wenglor.com in the product's separate download area.



NOTE!

The operating instructions must be read carefully before using the product and must be kept on hand for later reference.

1.2 Explanations of Symbols

- Safety precautions and warnings are emphasized by means of symbols and attention-getting words
- Safe use of the product is only possible if these safety precautions and warnings are adhered to

The safety precautions and warnings are laid out in accordance with the following principle:



Attention-Getting Word! Type and Source of Danger!

Possible consequences in the event that the hazard is disregarded.

- Measures for averting the hazard.

The meanings of the attention-getting words, as well as the scope of the associated hazards, are listed below.



DANGER!

This word indicates a hazard with a high degree of risk which, if not avoided, results in death or severe injury.



WARNING!

This word indicates a hazard with a medium degree of risk which, if not avoided, may result in death or severe injury.



CAUTION!

This word indicates a hazard with a low degree of risk which, if not avoided, may result in minor or moderate injury.



ATTENTION!

This word draws attention to a potentially hazardous situation which, if not avoided, may result in property damage.



NOTE!

A note draws attention to useful tips and suggestions, as well as information regarding efficient, error-free use.

1.3 Limitation of Liability

- The product has been developed in consideration of the current state-of-the-art and applicable standards and guidelines. Subject to change without notice.
- A valid declaration of conformity can be accessed at www.wenglor.com in the product's separate download area.
- wenglor sensoric elektronische Geräte GmbH (hereinafter referred to as "wenglor") excludes all liability in the event of:
 - Non-compliance with the instructions
 - Use of the product for purposes other than those intended
 - Use by untrained personnel
 - Use of unapproved replacement parts
 - Unapproved modification of products
- These operating instructions do not include any guarantees from wenglor with regard to the described procedures or specific product characteristics.
- wenglor assumes no liability for printing errors or other inaccuracies contained in these operating instructions, unless wenglor was verifiably aware of such errors at the point in time at which the operating instructions were prepared.

1.4 Copyrights

- The contents of these instructions are protected by copyright law.
- All rights are reserved by wenglor.
- Commercial reproduction or any other commercial use of the provided content and information, in particular graphics and images, is not permitted without previous written consent from wenglor.

2. For Your Safety

2.1 Use for Intended Purpose

The product is based on the following functional principle:

Fork Sensor

The emitter and the receiver are positioned opposite each other in a housing as a barrier. As soon as the light beam is interrupted, the fork sensor's output switches.

A fork sensor can be used to detect small holes, grooves and notches as well as to detect small parts.

This product can be used in the following industry sectors:

- Special machinery manufacturing
- Heavy machinery manufacturing
- Logistics
- Automotive industry
- Food industry
- Packaging industry
- Pharmaceuticals industry
- Plastics industry
- Woodworking industry
- Consumer goods industry
- Paper industry
- Electronics industry
- Glass industry
- Steel industry
- Aviation industry
- Chemicals industry
- Alternative energy
- Raw materials extraction

2.2 Use for Other than the Intended Purpose

- Not a safety component in accordance with 2006/42/EC (Machinery Directive)
- The product is not suitable for use in potentially explosive atmospheres.
- The product may only be used with accessories supplied or approved by wenglor, or combined with approved products. A list of approved accessories and combination products can be accessed at www.wenglor.com on the product detail page.

DANGER!



Risk of personal injury or property damage in case of use for other than the intended purpose!

Use for other than the intended purpose may lead to hazardous situations.

- Observe instructions regarding use for intended purpose.
-

2.3 Personnel Qualifications

- Suitable technical training is a prerequisite.
- In-house electronics training is required.
- Trained personnel must have uninterrupted access to the operating instructions.



DANGER!

Risk of personal injury or property damage in case of incorrect initial start-up and maintenance!

Personal injury and damage to equipment may occur.

- Adequate training and qualification of personnel.

2.4 Modification of Products



DANGER!

Risk of personal injury or property damage if the product is modified!

Personal injury and damage to equipment may occur. Non-observance may result in loss of the CE marking and the guarantee may be rendered null and void.

- Modification of the product is impermissible.

2.5 General Safety Precautions



NOTE!

- These instructions are an integral part of the product and must be kept on hand for the entire duration of its service life.
- In the event of possible changes, the respectively current version of the operating instructions can be accessed at www.wenglor.com in the product's download area.
- Read the operating instructions carefully before using the product.
- Protect the sensor against contamination and mechanical influences.

2.6 Approvals and protection class



3. Technical Data

3.1 Technical Data

Optical Data	
Fork Width	9 mm
Smallest Recognizable Part	0.7 mm
Light Source	Red light
Service Life (T = +25 °C)	100,000 h
Max. Ambient Light	10,000 Lux
Repeat Accuracy	0.05 mm
Electrical Data	
Supply Voltage	10 ... 30 V DC
Supply Voltage with IO-Link	18 ... 30 V DC
Current Consumption (Ub = 24 V)	< 20 mA
Switching Hysteresis	< 10 %
Switching Frequency	1,900 Hz
Switching frequency (speed mode)	3,000 Hz*
Response Time	0.26 ms
Response time (speed mode)	0.16 ms *
Temperature Range	-30 ... 60 °C**
Temperature Drift	< 10 %
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Setting Method	IO-Link
Mechanical Data	
Housing Material	Plastic
Optic Cover	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M8 × 1; 4-pin
Cable Length	150 mm
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	4838,37 a
PNP NO/NC antivalent	•
Connection Diagram	215
Ctrl. Panel	OP5
Suitable Mounting Technology No.	7s

* Default


** Temperature range with permanently installed cable, bending radius > 20 mm

3.2 Complementary Products

wenglor can provide you with suitable connection technology for your product.

Suitable connection technology no. **7**

S02




PNP-NPN converter BG7V1P-N-2M

IO-Link master

wTeach2 software DNNF005

3.3 Layout


P1HJ101

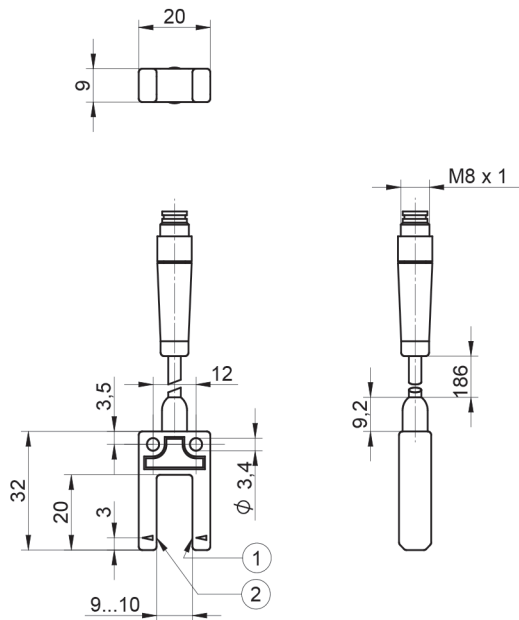

1 = emitter diode
2 = receiver diode
M3 screw = 0.5 Nm
Dimensions specified in mm (1 mm = 0.03937")

3.4 Control Panel

OP5



30 = switching status indicator / contamination warning

3.5 Scope of Delivery

- Sensor
- Safety precautions

4. Transport and Storage

4.1 Transport

Upon receipt of shipment, the goods must be inspected for damage in transit. In the case of damage, conditionally accept the package and notify the manufacturer of the damage. Then return the device, making reference to damage in transit.

4.2 Storage

The following points must be taken into condition with regard to storage:

- Do not store the product outdoors.
- Store the product in a dry, dust-free place.
- Protect the product against mechanical impacts.
- Protect the product against exposure to direct sunlight.



ATTENTION!

Risk of property damage in case of improper storage!

The product may be damaged.

- Storage instructions must be complied with.

5. Installation and Electrical Connection

5.1 Installation

- Protect the product from contamination during installation.
- Observe all applicable electrical and mechanical regulations, standards, and safety rules.
- Protect the product against mechanical influences.
- Make sure that the sensor is mounted in a mechanically secure fashion.
- Specified torque values must be complied with (see section “3. Technical Data”, page 7).

ATTENTION!



Risk of property damage in case of improper installation!

The product may be damaged.

- Installation instructions must be complied with.

CAUTION!



Risk of personal injury or property damage during installation!


Personal injury and damage to the product may occur.

- A safe installation environment must be assured.

NOTE!




When the fork sensor is aligned vertically, it must be ensured that the emitter (red light source) is mounted with an upward beam. Please observe the arrows embossed on the side of the housing. These must point upwards.




5.2 Electrical Connection

215

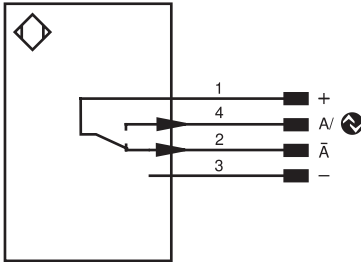

Legend

+	Supply Voltage +
—	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ȳ	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
QSSD	Safety Output
Signal	Signal Output
BLD+/-	Ethernet Gigabit bidirect. data line (A-D)
EN0R5422	Encoder 0-pulse 0-0 (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
W—	Ground for the Trigger Input
O	Analog Output
O—	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY—	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
⊕	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contactur Monitoring

ENAR5422	Encoder A/Ā (TTL)
ENBR5422	Encoder B/B̄ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
ACK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
Out	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

DANGER!



Risk of personal injury or property damage due to electric current!

Voltage conducting parts may cause personal injury or damage to equipment.




- The electric device may only be connected by appropriately qualified personnel.

5.3 Diagnostics

Causes for Triggering the Contamination Warning (blinking LED):

Display LED	Diagnosis/Cause	Elimination
Continuous blinking at approx. 2.5 Hz	Contamination	Carefully clean the optic cover with a cloth.
	Aged emitter diode	Replace the sensor.
	Unreliable working range	<ul style="list-style-type: none">• Increase the sensor's switching distance.• Reduce distance between sensor and object.
Continuous blinking at approx. 5 Hz	Short-circuit	Check electrical wiring and eliminate the short-circuit.
	Over-temperature	Disconnect the sensor from supply power and allow it to cool down.
	Hardware error	Replace the sensor.

Contamination Warning Flowcharts

Fork Sensor			
no contamination			
	Receiver	Emitter	Object
	not detected	detected	not detected
Switching Status Indicator	off ○	on ●	off ○
beginning contamination			
	Receiver	Emitter	Object
	not detected	detected	not detected
Switching Status Indicator	blinking ○	on ●	blinking ○
advanced contamination			
	Receiver	Emitter	Object
	not detected	not detected	not detected
Switching Status Indicator	on ●	on ●	on ●

Required action in case of fault:

NOTE!



- Shut down the machine.
- Analyze and eliminate the cause of error with the help of the diagnostics information.
- If the error cannot be eliminated, please contact wenglor's support department.
- Do not operate in case of indeterminate malfunctioning.
- The machine must be shut down if the error cannot be unequivocally clarified or reliably eliminated.

DANGER!



Risk of personal injury or property damage in case of non-compliance!

The system's safety function is disabled. Personal injury and damage to equipment.

- Required action as specified in case of fault.
-

6. Settings

- Make sure that the fork sensor is mounted in a mechanically secure manner.
- If necessary (detection of small or transparent objects), adjust the switching point via IO-Link.
- Insert the object into the working range between the emitter and receiver of the fork sensor and check the correct function using the switching status indicator.

7. IO-Link

Further settings are possible via the IO-Link interface. The IODD can be found at www.wenglor.com in the product's download area.

8. Maintenance Instructions



NOTE!

- This wenglor sensor is maintenance-free.
- Cleaning and inspection of the plug connections at regular intervals are advisable.
- Do not clean the sensor with solvents or cleansers which could damage the product.
- The product must be protected against contamination during initial start-up.

9. Proper Disposal

wenglor sensoric GmbH does not accept the return of unusable or irreparable products. Respectively valid national waste disposal regulations apply to product disposal.

10. Appendix

10.1 List of Abbreviations

Abbreviation	Meaning
Tu	Ambient temperature
Ub	Supply voltage
IODD	IO Device Description
MTTFd	Mean Time to Dangerous Failure

10.2 Change Index, Operating Instructions

Version	Date	Description/Change
1.0.0	10.03.2022	Initial version of the operating instructions

10.3 EU Declaration of Conformity

The EU declaration of conformity can be found on our website at www.wenglor.com in the product's download area.