
# **Reflex Light Barrier**

# P1PM103

Part Number





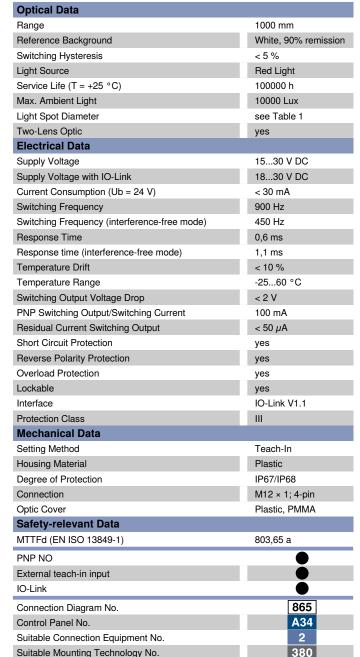



- Dynamic readjustment of the switching threshold
- **IO-Link 1.1**
- No blind spot
- Recognition of high-gloss and jet black objects
- Teach-in on moving background, such as feed belts

The reflex light barriers work with red light and detect objects both via the intensity of the backscattered light and via the distance to a previously taught-in reference background. Thanks to the combined detection principle, the sensors are suitable for contactless object detection without a reflector, regardless of color, shape or surface. Due to their large range, reflex light barriers enable ejection and presence check applications as well as object detection on wide feed belts. The IO-Link interface can be used to configure reflex light barriers (PNP/NPN, NC/NO, teach-in mode) as well as for reading out switching statuses.




#### **Complementary Products**

Suitable Mounting Technology No.


IO-Link Master
Set Protective Housing Z1PS001
Software

# Ctrl. Panel

A34



- 06 = Teach Button
- 30 = Switching Status/Contamination Warning
- 68 = supply voltage indicator



Legena					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENB	Encoder B
A	Switching Output (NO)	W	Trigger Input	Amin	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	Амах	Digital output MAX
V	Contamination/Error Output (NO)	0	Analog Output	Аок	Digital output OK
⊽	Contamination/Error Output (NC)	0-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	а	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colo	rs according to DIN IEC 60757
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
0	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	ower over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARS422	Encoder A/Ā (TTL)		•

## Table 1

Range	100 mm	500 mm	1000 mm
Light Spot Diameter	16 mm	22 mm	33 mm

## Permissible background distance

Background type, mounting distance

white (90 %)	0,11 m	black (6 %)	0,10,45 m
grey (18 %)	0,10,7 m	Stainless Steel	0,11 m









