


接线盒
适用于1D/2D和条码扫描仪

AB-0003-1

订货号

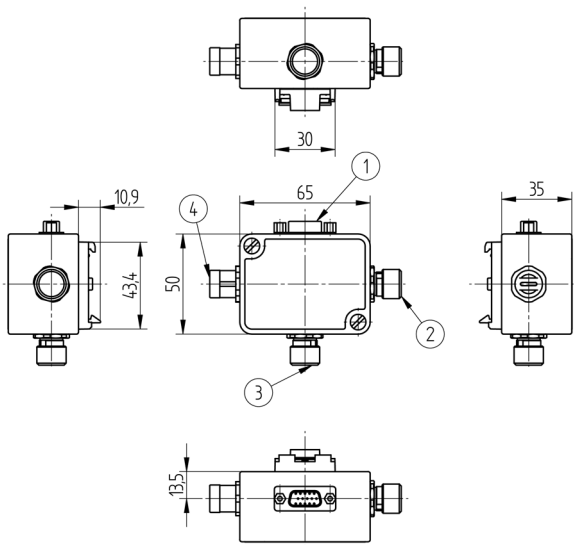

尺寸数据, 单位mm (1 mm = 0.03937 Inch)

技术数据


电气数据	
供电电压	10...30 V DC
扫描仪电压	5 V
电流消耗(Ub = 24 V)	500 mA
切换输出端数量	3
PNP切换输出端开关电流	400 mA
抗短路	是
反极性保护	是
防过载	是
机械数据	
防护等级	IP65
温度范围	-25...60 °C
外壳材料	塑料
重量	73 g
扫描仪连接方式	SubD 15 S
供电电压连接方式, I/O	M12 × 1 ; 8针
总线侧连接方式	M12 × 1 ; 8针
支撑轨道紧固	35 mm
包装箱	1件
NPN-PNP转换	☒
PNP常闭触点/常开触点 (可切换)	☒
接线表编号	35
适当的连接技术编号	88

- 传感器I/O的NPN-PNP转换
- 扫描仪的供电(5 V)
- 操作简单
- 连接主机、总线网关或扫描仪链的RS-232/422/485接口(Daisy Chain)

该接线盒为扫描仪的顺利运行提供通用的解决方案。它集供电电源和NPN-PNP转换器为一体。也可以利用它将扫描仪简便快捷地连接在PC或笔记本上, 以便对扫描仪进行配置。

补充的产品

接口电缆S232W3



Suitable Plug: 16

Scanner

PIN	Host RS-232	Host & Aux RS-232	Host RS-422/485	In/Out
1	Power 5 V DC			In
2	TxD	TxD	TxD (-)	Out
3	RxD	RxD	RxD (-)	In
4	Power/Signal Ground			
5				
6	RTS (5 V only)	Aux TxD	TxD (+)	Out
7	Output 1 TTL			Out
8	Default Configuration			In
9	Trigger (NPN)			In
10	CTS (5 V only)	Aux RxD	RxD (+)	In
11	Output 3 TTL			Out
12	New Master (NPN)			In
13	Chassis Ground			
14	Output 2 TTL			Out

Suitable Plug: 88

Serial Communications/Host

PIN	Function	In/Out
2	Power 10...28 V DC	
3	Ground 0 V DC	
4	TxD/TxD (-)	Out
5	RxD/RxD (-)	In
6	CTS/Aux RxD/RxD (+)	In
7	RTS/Aux TxD/TxD (+)	Out

Suitable Plug: 88

Power

PIN	Function	In/Out
1	Output 1	Out
2	Power 10...28 V DC	In
3	Ground 0 V DC	
4	Output 2	Out
5	Default Configuration	In
6	Output 3	Out
7	Trigger	In
8	New Master	In

Suitable Plug: 88s

Daisy Chain

PIN	Function	In/Out
2	Power 10...30 V DC	
3	Ground 0 V DC	
4	Aux RxD	In
5	Aux TxD	Out

