

# Flow Sensor

## FFAF029


Part Number

UniFlow



- Display can be switched between flow and medium temperature
- Highest precision of its class
- Installation in any position
- Measurement independent of flow direction
- Simple operation via the display
- Temperature of the medium: 0 ... 100° C (140° C for 24 hours without current measurement)

wenglor UniFlow flow sensors measure the flow rate of aqueous and oily media in closed piping systems. UniFlow flow sensors are very easy to operate thanks to the integrated display. The highly visible switching status display enables the rapid localization of affected sensors for maintenance processes.

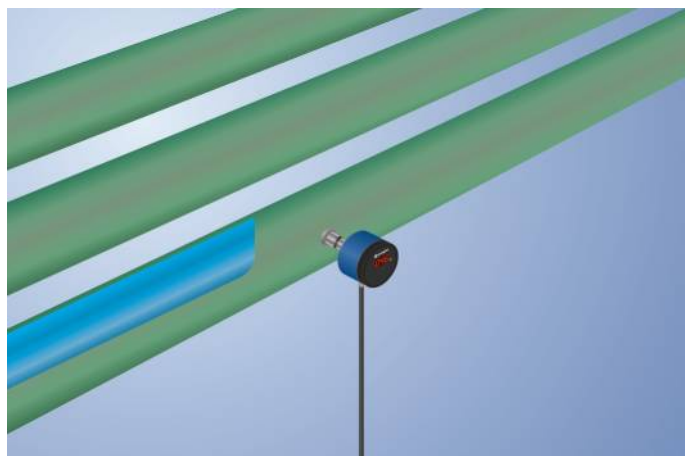

### Technical Data

#### Sensor-specific data

|                                           |               |
|-------------------------------------------|---------------|
| Selectable measuring range                | 10...300 cm/s |
| Measuring range 1                         | 10...150 cm/s |
| Setting range 1                           | 15...150 cm/s |
| Measuring range 2                         | 20...300 cm/s |
| Setting range 2                           | 30...300 cm/s |
| Medium                                    | Water         |
| Measuring error (total)                   | 2 %           |
| MTTFd (EN ISO 13849-1)                    | 766,91 a      |
| Switching Hysteresis                      | 5 %           |
| Temperature gradient                      | 30 K          |
| Response time in case of temperature jump | 10 s          |

#### Environmental conditions

|                                            |                     |
|--------------------------------------------|---------------------|
| Temperature of medium                      | 0...100 °C          |
| Temperature of the medium, short-term      | 140 °C              |
| Ambient temperature                        | -20...70 °C         |
| Pressure Resistance                        | 60 bar              |
| EMC                                        | DIN EN 60947-5-9    |
| Shock resistance per DIN IEC 68-2-27       | 30 g / 11 ms        |
| Vibration resistance per DIN IEC 60068-2-6 | 20 g (10...2000 Hz) |

#### Electrical Data

|                                             |              |
|---------------------------------------------|--------------|
| Supply Voltage                              | 16...32 V DC |
| Current Consumption (U <sub>b</sub> = 24 V) | 60 mA        |
| Number of Switching Outputs                 | 1            |
| Analog Output                               | 4...20 mA    |
| Signal source                               | Flow         |
| Response Time                               | 1...5 s      |
| Relay Output/Switching Current (24 VDC)     | < 1 A        |
| Current Output Load Resistance              | < 500 Ohm    |
| Short Circuit Protection                    | yes          |
| Reverse Polarity Protection                 | yes          |
| Protection Class                            | III          |

#### Mechanical Data


|                                 |                     |
|---------------------------------|---------------------|
| Setting Method                  | Menu                |
| Housing Material                | PBT; PC; FKM        |
| Material Control Panel          | Polyester           |
| Material in contact with media  | 1.4435; 1.4404; FKM |
| Degree of Protection            | IP67 *              |
| Connection                      | M12 × 1; 5-pin      |
| Process Connection              | G 1/2"              |
| Process Connection Length (PCL) | 47 mm               |
| Probe Length (PL)               | 10 mm               |

|                                   |         |
|-----------------------------------|---------|
| Analog output flow                | ●       |
| PNP NO                            | ●       |
| Connection Diagram No.            | 1002    |
| Control Panel No.                 | A03     |
| Suitable Connection Equipment No. | 35      |
| Suitable Mounting Technology No.  | 903 905 |

\* Certified by wenglor

### Complementary Products


|                    |
|--------------------|
| Seal G1/2" ZH5G002 |
| Software           |

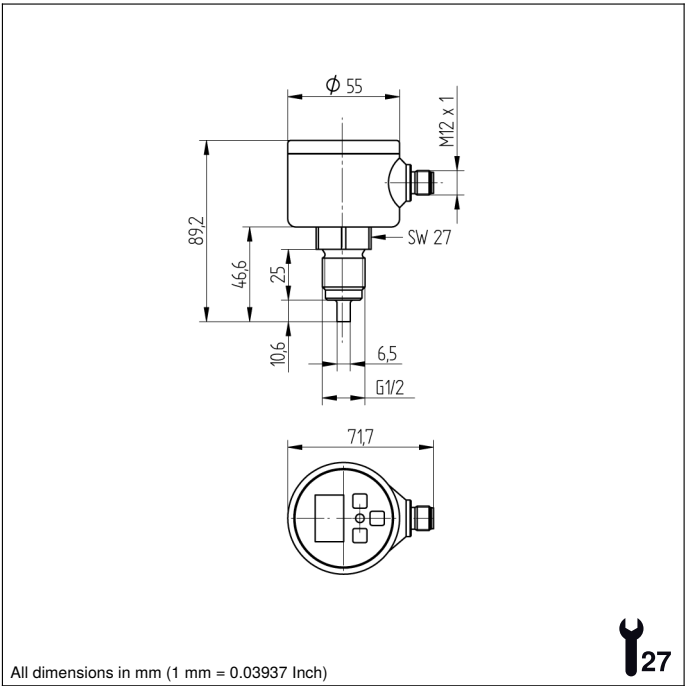

All dimensions in mm (1 mm = 0.03937 Inch)




## Ctrl. Panel



01 = Switching Status Indicator  
20 = Enter key  
22 = Up key  
60 = display  
99 = Right button

1002



| Legend    |                                            |                                        |                                |
|-----------|--------------------------------------------|----------------------------------------|--------------------------------|
| +         | Supply Voltage +                           | nc                                     | Not connected                  |
| -         | Supply Voltage 0 V                         | U                                      | Test Input                     |
| ~         | Supply Voltage (AC Voltage)                | Ü                                      | Test Input inverted            |
| A         | Switching Output (NO)                      | W                                      | Trigger Input                  |
| Ä         | Switching Output (NC)                      | W-                                     | Ground for the Trigger Input   |
| V         | Contamination/Error Output (NO)            | O                                      | Analog Output                  |
| Ÿ         | Contamination/Error Output (NC)            | O-                                     | Ground for the Analog Output   |
| E         | Input (analog or digital)                  | BZ                                     | Block Discharge                |
| T         | Teach Input                                | Amv                                    | Valve Output                   |
| Z         | Time Delay (activation)                    | a                                      | Valve Control Output +         |
| S         | Shielding                                  | b                                      | Valve Control Output 0 V       |
| RxD       | Interface Receive Path                     | SY                                     | Synchronization                |
| TxD       | Interface Send Path                        | SY-                                    | Ground for the Synchronization |
| RDY       | Ready                                      | E+                                     | Receiver-Line                  |
| GND       | Ground                                     | S+                                     | Emitter-Line                   |
| CL        | Clock                                      | ±                                      | Grounding                      |
| E/A       | Output/Input programmable                  | SnR                                    | Switching Distance Reduction   |
| IO-Link   | IO-Link                                    | Rx+/-                                  | Ethernet Receive Path          |
| PoE       | Power over Ethernet                        | Tx+/-                                  | Ethernet Send Path             |
| IN        | Safety Input                               | Bus                                    | Interfaces-Bus A(+)/B(-)       |
| OSSD      | Safety Output                              | La                                     | Emitted Light disengageable    |
| Signal    | Signal Output                              | Mag                                    | Magnet activation              |
| BL_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES                                    | Input confirmation             |
| ENo RS422 | Encoder 0-pulse 0/Ü (TTL)                  | EDM                                    | Contact Monitoring             |
| PT        | Platinum measuring resistor                | ENARIS422                              | Encoder A/Ä (TTL)              |
|           |                                            | ENBRIS422                              | Encoder B/B (TTL)              |
|           |                                            | ENA                                    | Encoder A                      |
|           |                                            | ENb                                    | Encoder B                      |
|           |                                            | AMIN                                   | Digital output MIN             |
|           |                                            | AMAX                                   | Digital output MAX             |
|           |                                            | AOK                                    | Digital output OK              |
|           |                                            | SY In                                  | Synchronization In             |
|           |                                            | SY OUT                                 | Synchronization OUT            |
|           |                                            | OLT                                    | Brightness output              |
|           |                                            | M                                      | Maintenance                    |
|           |                                            | rsv                                    | Reserved                       |
|           |                                            | Wire Colors according to DIN IEC 60757 |                                |
|           |                                            | BK                                     | Black                          |
|           |                                            | BN                                     | Brown                          |
|           |                                            | RD                                     | Red                            |
|           |                                            | OG                                     | Orange                         |
|           |                                            | YE                                     | Yellow                         |
|           |                                            | GN                                     | Green                          |
|           |                                            | BU                                     | Blue                           |
|           |                                            | VT                                     | Violet                         |
|           |                                            | GY                                     | Grey                           |
|           |                                            | WH                                     | White                          |
|           |                                            | PK                                     | Pink                           |
|           |                                            | GNYE                                   | Green/Yellow                   |