

Reflex Sensor with Background Suppression


HT66MGV80

Part Number



- Digital, analog and error output
- Go/no-go testing possible
- Infrared light
- Triple beam correction principle

These sensors are equipped with an analog output, as well as a digital output. The upper and lower switching points of the digital output can be adjusted with two potentiometers. The digital output is activated when an object is located within the window defined in this way.

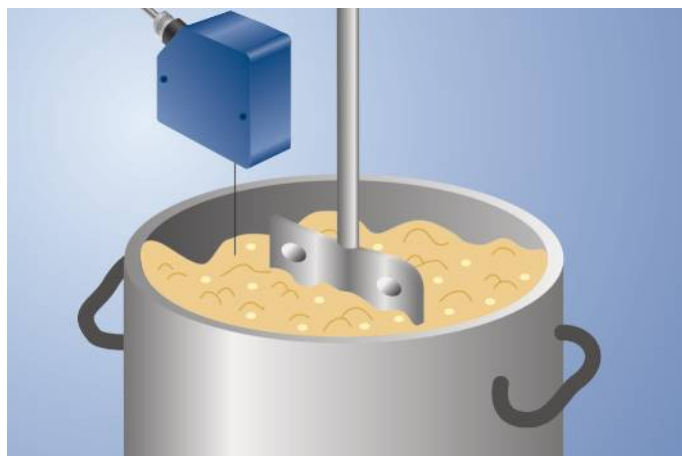


Technical Data

Optical Data	
Working Range	350...850 mm
Measuring Distance	600 mm
Measuring Range	500 mm
Resolution	see Table 1
Linearity	1 %
Switching Hysteresis	20 mm
Light Source	Infrared Light
Wavelength	880 nm
Service Life (T = +25 °C)	100000 h
Risk Group (EN 62471)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 50 mA
Cut-Off Frequency	100 Hz
Response Time	5 ms
Temperature Drift	200 μm/K
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Error Output Voltage Drop	< 2,5 V
PNP Error Output/Switching Current	200 mA
Analog Output	0...10 V
Output Current Analog Output	500 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 × 1; 8-pin
Error Output	●
PNP NO	●
Analog Output	●
Connection Diagram No.	506
Control Panel No.	T5
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	330


Complementary Products

Analog Evaluation Unit AW02

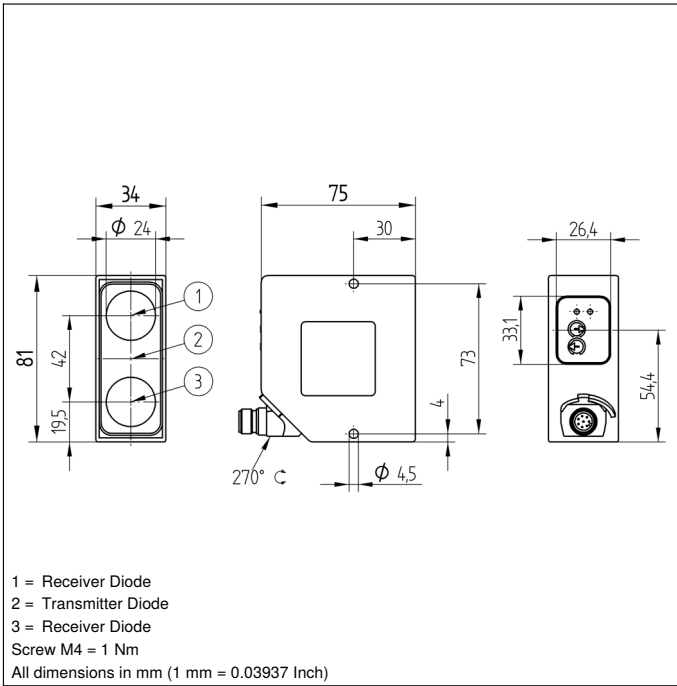


Ctrl. Panel

T5



- 01 = Switching Status Indicator
- 13 = Upper Potentiometer
- 14 = Lower Potentiometer
- 33 = Analog Voltage Output/Error Warning

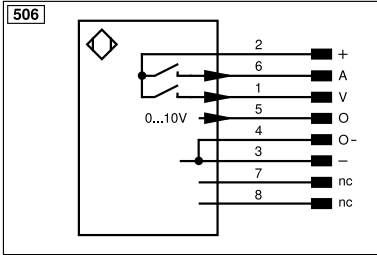


Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/A (TTL)
			Encoder B/B (TTL)
			Encoder A
			Encoder B
			Digital output MIN
			Digital output MAX
			Digital output OK
			Synchronization In
			Synchronization OUT
			Brightness output
			Maintenance
			Reserved
			Wire Colors according to DIN IEC 60757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow

Table 1

Working Distance	350 mm	600 mm	850 mm
Light Spot Diameter	6 mm	10 mm	20 mm
Resolution	0,3 mm	3 mm	8 mm

Error of Measurement

Typical characteristic curve based on white, 90 % remission

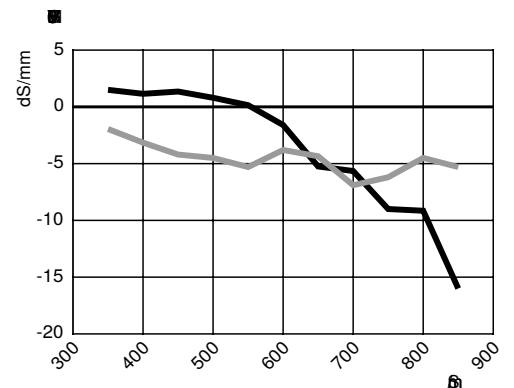

S = Measuring Distance

dS = Deviation

— black 6 % remission

— grey 18 % remission

