

Safety Light Curtain


Hand Protection

SEFG511



- Higher levels of safety and availability thanks to intelligent muting functions
- Multifunctional thanks to measuring function
- Quick duplication of settings via microSD memory card
- Simple configuration and diagnosis with wTech2 software

The safety light curtain can be flexibly integrated into systems thanks to the well-conceived mounting technology and the compact housing. Alignment of the emitter and the receiver is simplified by the visible red light and the signal strength display. User-friendly wTech2 software make settings and diagnosis via the IO-Link interface extremely easy. Settings can be subsequently saved to a microSD card and quickly duplicated on other products. Extensive muting functions guarantee an ideal solution for every application in order to safely transport objects into and out of the danger zone.

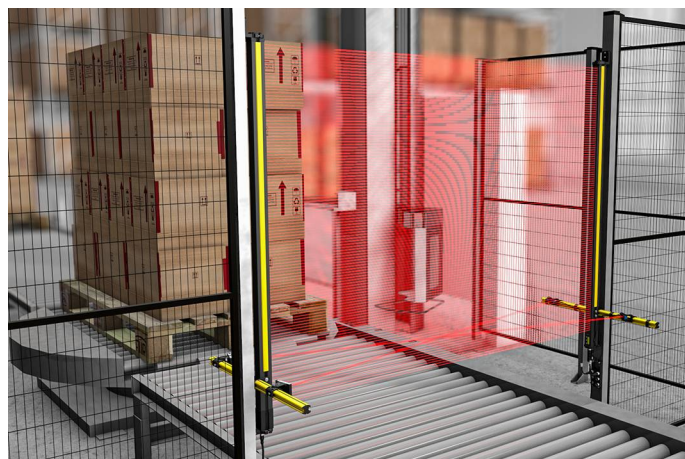

Optical Data

Range	0,25...20 m
Housing Length (L)	258 mm
Safety Field Height (SFH)	159 mm
Resolution	30 mm
Light Source	Red Light
Wavelength	630 nm
Opening Angle	± 2,5 °

Electrical Data

Sensor Type	Emitter
Supply Voltage	19,2...28,8 V DC
Current Consumption (U _b = 24 V)	≤ 100 mA
Response Time	8,2 ms
Temperature Range	-30...55 °C
Storage temperature	-30...70 °C
Number of safety outputs (OSSDs)	2
Safety Output Voltage Drop	≤ 2,3 V
PNP Safety Output/Switching Current	≤ 300 mA
Number of Signal Outputs	1
Signal Output Voltage Drop	≤ 2,5 V
Signal Output/Switching Current	≤ 100 mA
Short Circuit Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III

Mechanical Data

Housing Material	Aluminum, anodised
Optic Cover	Plastic, PC
Degree of Protection	IP65
Degree of Protection	IP67
Connection	M12 × 1; 5-pin

Safety-relevant Data

ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
PFHD	≤ 1.8 × 10 ⁻⁸
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL 3
Safety Integrity Level (EN 62061)	SILCL 3

Function

Hand Protection	yes
Scope of delivery	1 × safety light curtain

Connection Diagram No.

1031

Suitable Connection Equipment No.

35

Suitable Mounting Technology No.

701 | 810 | 860 | 870 | 880

Suitable Receiver

SEFG611

Complementary Products


Deflection mirror Z0030

Protection column with Z2SU001 deflection mirror

Protection columns with/without protective screen (Z2SS001/ Z2SM001)

Ctrl. Panel

A38

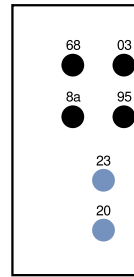

03 = Error Indicator

68 = Power LED

8a = coding

95 = Diagnosis/Large Detection Range

