

Pressure Sensor

FX2P203

Part Number

weFlux² InoxSens



- **Analog output: 4...20 mA**
- **Compact, laser-welded stainless steel 316L housing**
- **Precise measuring accuracy: $\pm 0.5\%$**
- **Very fast response time of < 1 s**

Technical Data

Sensor-specific data

Measuring Range	0...0,25 bar
Measurement Type	relative
Maximum overload pressure	1 bar
Bursting pressure	1,5 bar
Medium	Liquids, gases
Pressure response time (t90)	< 1 ms
Measuring error (total)	$\leq \pm 0,5\%$
Hysteresis	$< \pm 0,1\%$
Linearity Deviation	$< \pm 0,5\%$
Zero-point error	$< \pm 0,1\%$
Repeat Accuracy	$< \pm 0,1\%$
Temperature coefficient zero-point	$< \pm 0,15\% / 10K$
Temperature coefficient range	$< \pm 0,2\% / 10K$

Environmental conditions

Temperature of medium	-25...125 °C**
Ambient temperature	-25...80 °C
Storage temperature	-25...80 °C
EMC	DIN EN 61326-2-3
Shock resistance per DIN IEC 68-2-27	50 g / 11 ms
Vibration resistance per DIN IEC 60068-2-6	10 g (10...2000 Hz)

Electrical Data

Supply Voltage	9...28 V DC
Current Consumption (U _b = 24 V)	< 21 mA
Analog Outputs	1
Analog Output	4...20 mA Press
Current Output Load Resistance	< 500 Ohm
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data

Sensor element	Ceramic membrane
Housing Material	1.4404
Material in contact with media	1.4404; FKM; ceramic
Degree of Protection	IP65 *
Connection	M12 × 1; 4-pin
Process Connection	G 1/4"
Seal material	FKM

Safety-relevant Data



MTTFd (EN ISO 13849-1)	3283,16 a
------------------------	-----------

Analog Output	●
Connection Diagram No.	142
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	919

* Not UL certified

** Sensors up to 125 °C medium temperature suitable. During installation, please ensure that the sensor housing is sufficiently cooled by the surroundings.



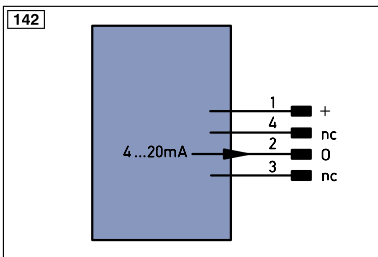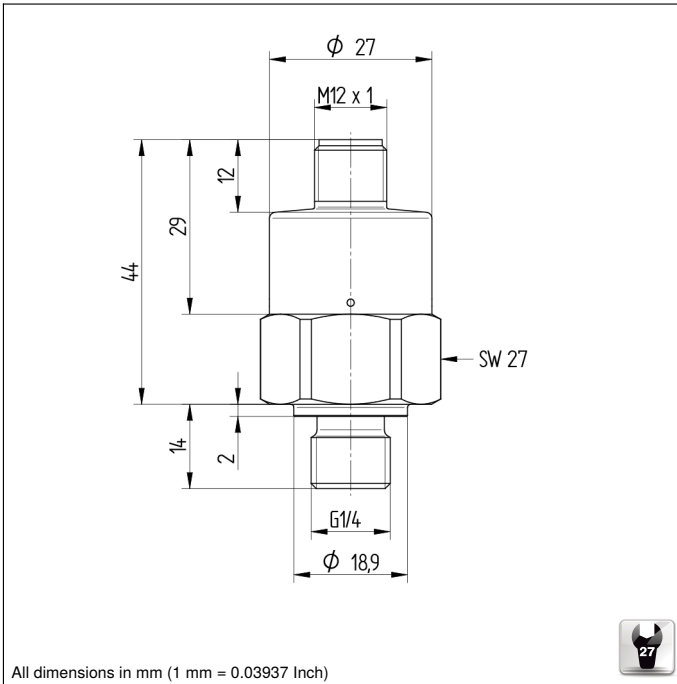

Legend	
+	Supply Voltage +
-	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ṽ	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSSD	Safety Output
Signal	Signal Output
Bl..D+/-	Ethernet Gigabit bidirect. data line (A-D)
EN0..RS422	Encoder 0-pulse 0-0 (TTL)
PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ū	Test Input inverted
W	Trigger Input
W-	Ground for the Trigger Input
O	Analog Output
O-	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY-	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
S _n R	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
L _a	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contacting Monitoring
EN _A RS422	Encoder A/Ā (TTL)
EN _B RS422	Encoder B/B̄ (TTL)
EN _A	Encoder A
EN _B	Encoder B
A _{MIN}	Digital output MIN
A _{MAX}	Digital output MAX
A _{OK}	Digital output OK
SY _{in}	Synchronization In
SY _{OUT}	Synchronization OUT
O _{LT}	Brightness output
M	Maintenance reserved
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

