

Safety Light Array

Body Protection

SEFB422

Part Number



- Multifunctional thanks to measuring function
- Quick alignment through visible red light
- Simple configuration and diagnosis with wTeach2 software

The safety light array can be attached anywhere thanks to the T nut and mounting bracket. The visible red light and signal strength display make it easy to align the emitter and the receiver. Safety mode, restart prevention, and contactor monitoring are included as standard functions. The protective equipment can be configured using the user-friendly IO-Link and wenglor software wTeach2. Optional LED indicators visualize switch states or error messages



Technical Data

Optical Data

Range	0,5...50 m
Beam Distance	500 mm
Number of Beams	2
Light Source	Red Light
Wavelength	630 nm
Max. Ambient Light	10000 Lux
Opening Angle	± 2,5 °

Electrical Data

Sensor Type	Set
Supply Voltage	19,2...28,8 V DC
Current Consumption (U _b = 24 V)	≤ 350 mA
Response Time	15 ms
Temperature Range	-30...55 °C
Storage temperature	-30...70 °C
No. Safety Outputs (OSSDs)	2
Safety Output Voltage Drop	≤ 2,3 V
PNP Safety Output/Switching Current	≤ 300 mA
Number of Signal Outputs	1
Signal Output Voltage Drop	≤ 2,5 V
Signal Output/Switching Current	≤ 100 mA
Short Circuit and Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III

Mechanical Data

Housing Material	Aluminum
Disc Material	Polycarbonate
Degree of Protection	IP65/IP67
Connection	M12 × 1; 8-pin

Safety-relevant Data

ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3

Function


Body Protection	yes
Scope of Functions	Basic Function
Scope of delivery	ZEFX001 mounting
Scope of delivery (Emitter; Receiver)	SEFB512; SEFB622

IO-Link


Connection Diagram No.	1029	1031	
Control Panel No.	A38	A40	
Suitable Connection Equipment No.	35	89	
Suitable Mounting Technology No.	860	870	880

Complementary Products


Connection Box for Muting Sensors
IO-Link Master
LED indicator strip set Z99G015
Muting Sensor Set
Path-Folding Mirror Z2UG001
Protection Column with Path-Folding Mirror SZ000EU125NN01
Protection Column with Protective Screen Z2SS001
Safety Relay SG4-00VA000R2, SR4B3B01S, SR4D3B01S
Software

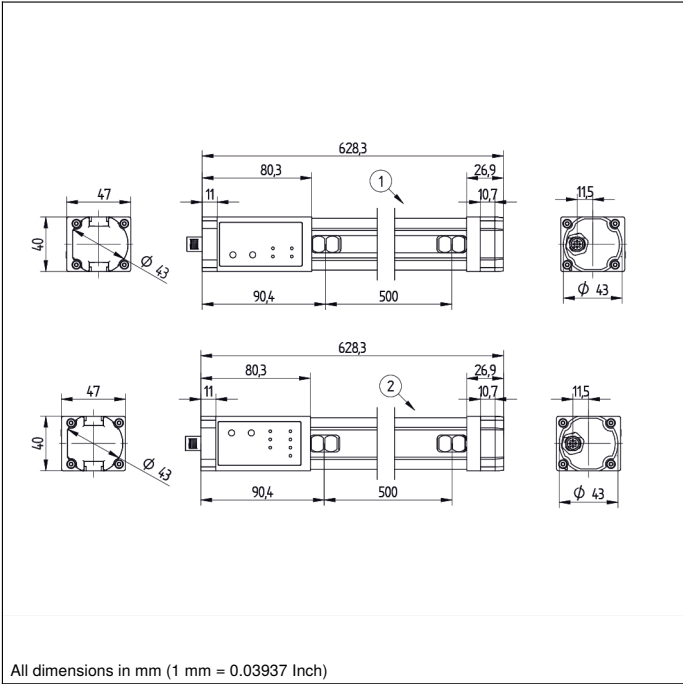

Ctrl. Panel



- 03 = Error Indicator
- 20 = Enter Button
- 22 = UP Button
- 23 = Down Button
- 52 = OSSD ON
- 53 = OSSD OFF
- 60 = Display
- 68 = Supply Voltage Indicator
- 82 = Acknowledgement Request
- 8a = Coding
- 95 = Diagnosis/Large Detection Range
- 9a = Weak signal

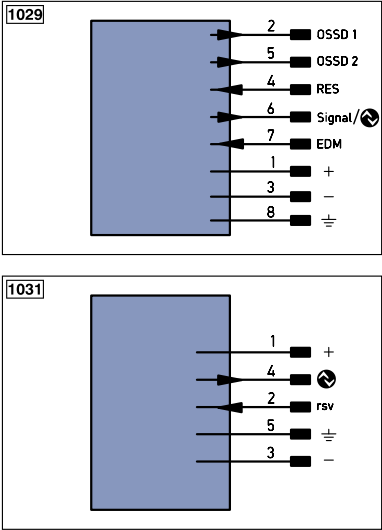

Legend

+	Supply Voltage +	PT	Platinum measuring resistor	ENAR542Z	Encoder A/Ä (TTL)
-	Supply Voltage 0 V	nc	not connected	ENB542Z	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENa	Encoder A
A	Switching Output (NO)	U	Test Input inverted	ENb	Encoder B
Ä	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V̄	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY in	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
Z	Time Delay (activation)	AWV	Valve Output	OLt	Brightness output
S	Shielding	a	Valve Control Output +	M	Maintenance
RxD	Interface Receive Path	b	Valve Control Output 0 V	rsv	reserved
TxD	Interface Send Path	SY	Synchronization	Wire Colors according to IEC 60757	
RDY	Ready	SY-	Ground for the Synchronization	BK	Black
GND	Ground	E+	Receiver-Line	BN	Brown
CL	Clock	S+	Emitter-Line	RD	Red
E/A	Output/Input programmable	±	Grounding	OG	Orange
IO-Link	IO-Link	SnR	Switching Distance Reduction	YE	Yellow
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	La	Emitted Light disengageable	GY	Grey
BL-D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN0r542Z	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation	PK	Pink
		EDM	Contacting Monitoring	GNYE	Green/Yellow

