

# Safety Light Curtain

## Finger Protection

### SEFG633

Part Number



- Higher levels of safety and availability thanks to intelligent muting functions
- Multifunctional thanks to measuring function
- Quick duplication of settings via microSD memory card
- Simple configuration and diagnosis with wTeach2 software

The safety light curtain can be flexibly integrated into systems thanks to the well-conceived mounting technology and the compact housing. Alignment of the emitter and the receiver is simplified by the visible red light and the signal strength display. User-friendly wTeach2 software make settings and diagnosis via the IO-Link interface extremely easy. Settings can be subsequently saved to a microSD card and quickly duplicated on other products. Extensive blanking and muting functions ensure an ideal solution for every application, in order to safely transport objects into and out of the danger zone.



## Technical Data

### Optical Data

Range	0,25...7 m
Housing Length (L)	559 mm
Safety Field Height (SFH)	460 mm
Resolution	14 mm
Light Source	Red Light
Max. Ambient Light	10000 Lux
Opening Angle	± 2,5 °

### Electrical Data

Sensor Type	Receiver
Supply Voltage	19,2...28,8 V DC
Current Consumption (U <sub>b</sub> = 24 V)	≤ 350 mA
Response Time	12,6 ms
{Reaktionszeit_special}	18,4 ms
Temperature Range	-30...55 °C
Storage temperature	-30...70 °C
No. Safety Outputs (OSSDs)	2
Safety Output Voltage Drop	≤ 2,3 V
PNP Safety Output/Switching Current	≤ 300 mA
Number of Signal Outputs	1
Signal Output Voltage Drop	< 2,5 V
Signal Output/Switching Current	< 100 mA
Short Circuit and Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III

### Mechanical Data

Housing Material	Aluminum
Disc Material	Polycarbonate
Degree of Protection	IP65/IP67
Connection	M12 × 1; 8-pin

### Safety-relevant Data

ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3

### Function

Finger Protection	yes
Scope of Functions	Muting and Blanking
Scope of delivery	ZEFX001 mounting

### IO-Link


Connection Diagram No.	1029 1030
Control Panel No.	A39
Suitable Connection Equipment No.	89
Suitable Mounting Technology No.	860 870 880

## Suitable Emitter


SEFG533

## Complementary Products



IO-Link Master
Laser Alignment Tool Z98G001
microSD card ZNNG013
Protection column with Z2SU001 path-folding mirror
Protection columns with/without protective screen (Z2SS001/ Z2SM001)
Safety Relay SG4-00VA000R2, SR4B3B01S, SR4D3B01S
ZEMG003 and ZEMG009 test rods
ZFBB001 muting connection box
ZMZG005 muting arm

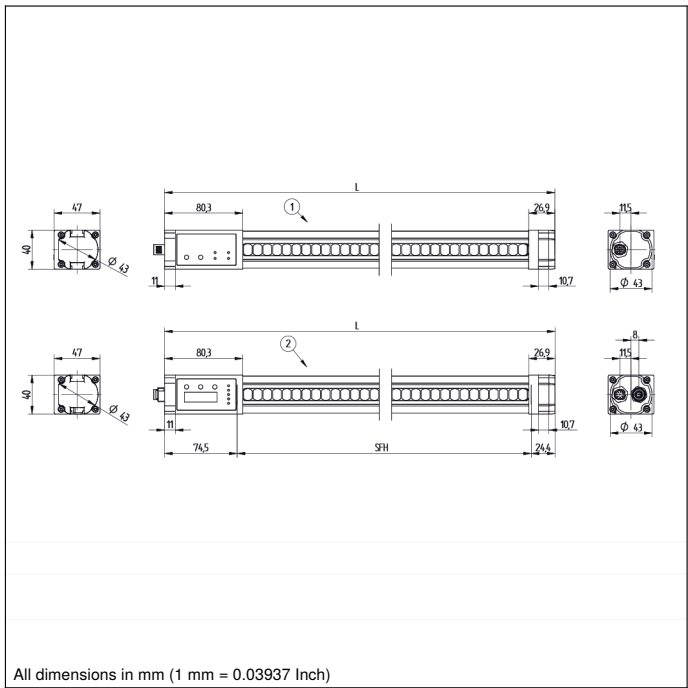

## Ctrl. Panel

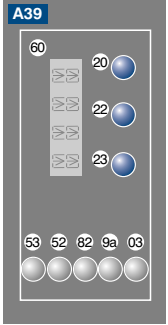

- 03 = Error Indicator
- 20 = Enter Button
- 22 = UP Button
- 23 = Down Button
- 52 = OSSD ON
- 53 = OSSD OFF
- 60 = Display
- 82 = Acknowledgement Request
- 9a = Weak signal

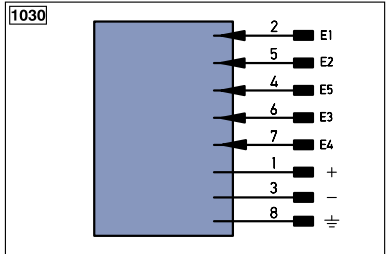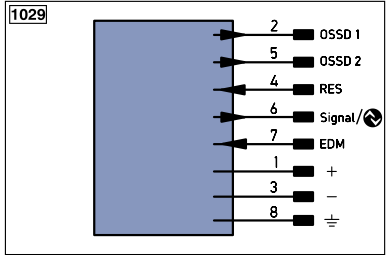

### Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	U	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
V̄	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	Awv	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	S+	Emitter-Line
E/A	Output/Input programmable	⊕	Grounding
IO-Link	IO-Link	SnR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
BL-D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN0 RS422	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contacting Monitoring

ENAR5422	Encoder A/Ā (TTL)
EN0 RS422	Encoder B/B̄ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY in	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

