

Retro-Reflex Sensor


XW100NA3 LASER

Part Number



- Range: 14 m
- Smallest recognizable part: 0,1 mm
- Stainless steel housing
- Switching frequency: 3 kHz

A reflector must be used in combination with these sensors. They can be installed in all kinds of industrial environments thanks to ample functional reserve. Even reflective objects can be reliably recognized through the use of polarized light.

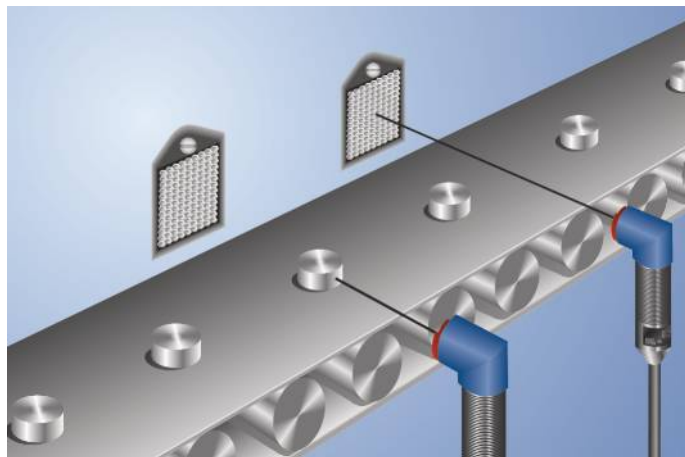


Technical Data


Optical Data	
Range	14000 mm
Reference Reflector/Reflex Foil	RQ100BA
Smallest Recognizable Part	100 μ m
Switching Hysteresis	< 15 %
Light Source	Laser (red)
Wave Length	655 nm
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Opening Angle	1 °
Beam Divergence	< 15 mrad
Spot Diameter	see Table 1
Focus Distance	350 mm
Two-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	3 kHz
Response Time	167 μ s
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
NPN Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	0820385-000
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Stainless Steel
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 $\times$ 1; 4-pin
NPN NO/NC antivalent	●
Connection Diagram No.	301
Control Panel No.	D6
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	150

Complementary Products


Reflector, Reflex Foil

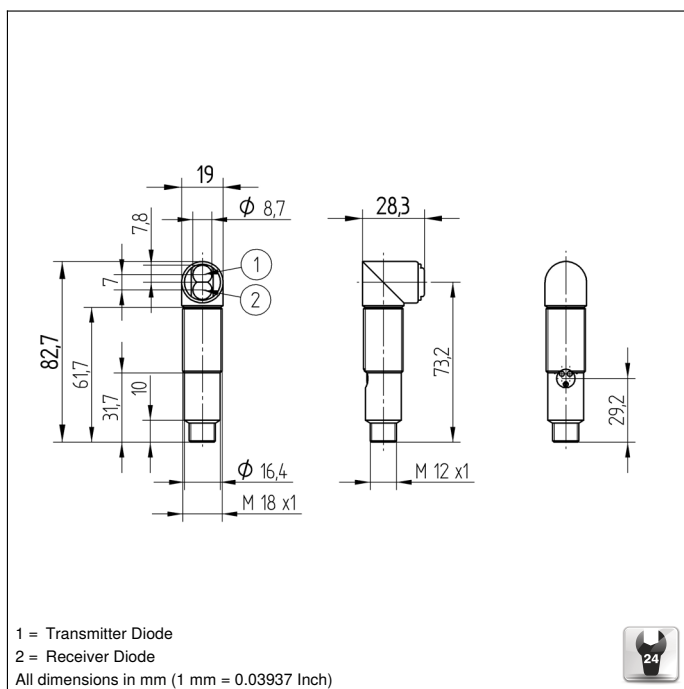

Ctrl. Panel



- 01 = Switching Status Indicator
02 = Contamination Warning
05 = Switching Distance Adjuster

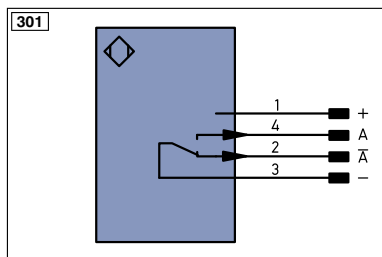

Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	U	Test Input inverted
Ä	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
V	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AWV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	E+	Receiver-Line
RDY	Ready	S+	Emitter-Line
GND	Ground	±	Grounding
CL	Clock	SnR	Switching Distance Reduction
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path
IO-Link	IO-Link	Tx+/-	Ethernet Send Path
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)
IN	Safety Input	La	Emitted Light disengageable
OSSD	Safety Output	Mag	Magnet activation
Signal	Signal Output	RES	Input confirmation
BI-D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contacting Monitoring
EN0 RS422	Encoder 0-pulse 0-0 (TTL)	ENAR5422	Encoder A/Ä (TTL)
		ENBR5422	Encoder B/B (TTL)

ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
LI	Brightness output
M	Maintenance

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Table 1

Working Distance	0,2 m	5 m	10 m
Spot Diameter	3 mm	37,5 mm	75 mm

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0,6...14 m	RR25_M	0,4...4,5 m
RE18040BA	0,6...9,5 m	RR25KP	0,3...2,5 m
RQ84BA	0,75...11 m	RR21_M	0,4...3 m
RR84BA	0,55...14 m	ZRAE02B01	0,7...4,5 m
RE9538BA	0,55...5 m	ZRME01B01	0,5...1,8 m
RE6151BM	0,35...10 m	ZRME03B01	0,5...5 m
RR50_A	0,65...9 m	ZRMR02K01	0,5...2 m
RE6040BA	0,5...11 m	ZRMS02_01	0,6...2,8 m
RE8222BA	0,7...5,5 m	RF508	0,4...1,1 m
RR34_M	0,6...5,5 m	RF258	0,4...1,6 m
RE3220BM	0,55...3,5 m	ZRDF_K01	0,4...7 m
RE6210BM	0,45...3,5 m		

