

Reflex Sensor with Background Suppression

P1RH001

Part Number



- IO-Link 1.1
- Red light
- Reliably detect objects against any background
- Simple installation
- Teach-in, external teach-in

The reflex sensor with background suppression works with red light according to the angle measurement principle and is suitable for the detection of objects against any background. The sensor always has the same switching distance, regardless of the color, shape and surface of the objects. Minimal height differences can be detected with the sensors and, for example, various parts can be reliably differentiated from each other. The IO-Link interface can be used to configure reflex sensors (PNP/NPN, NC/NO) and to output switching statuses.



Technical Data

Optical Data	
Range	120 mm
Setting Range	35...120 mm
Switching Hysteresis	< 5 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table

Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 35 mA
Switching Frequency	1000 Hz
Switching Frequency (interference-free mode)	500 Hz
Response time (interference-free mode)	1 ms
Response Time	0,5 ms
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2 V
PNP Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Teach Mode	HT, VT
Interface	IO-Link V1.1
Protection Class	III

Mechanical Data	
Setting Method	Teach-In
Housing Material	Brass, nickel-plated
Housing Material	Plastic, PBT
Full Encapsulation	yes
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin


Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1629,97 a

PNP NO	●
External teach-in input	●
IO-Link	●

Connection Diagram No.	865
Control Panel No.	A51
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	150 370


Complementary Products

Dust Extraction Tube STAUBTUBUS-01
IO-Link Master
Software

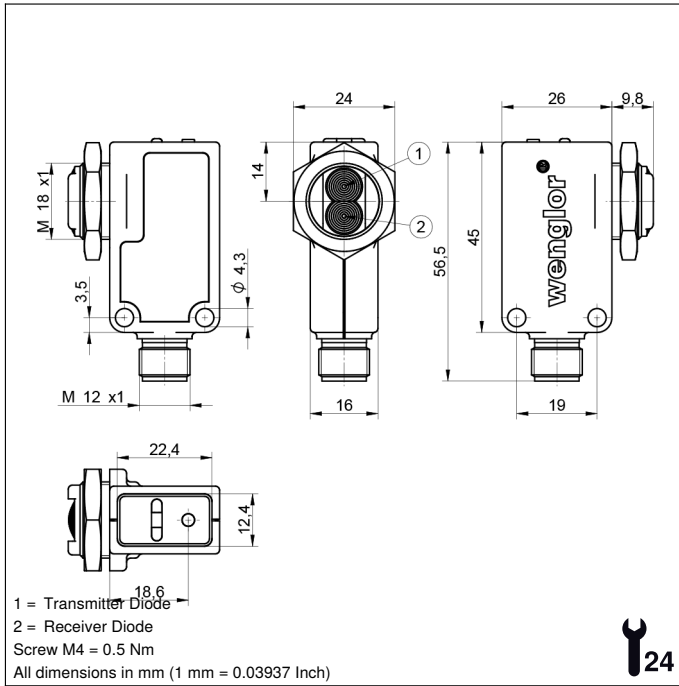


Ctrl. Panel

A 51



06 = Teach Button
 30 = Switching Status/Contamination Warning
 68 = supply voltage indicator

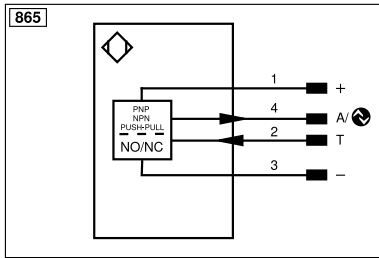


Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/A (TTL)
			Wire Colors according to DIN IEC 60757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow

Table 1

Detection Range	60 mm	120 mm
Light Spot Diameter	2,5 mm	5 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

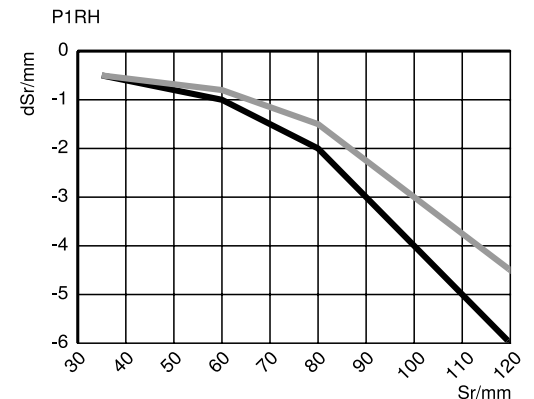

dSr = Switching Distance Change

Sr = Switching Distance

— black 6 % remission

— grey 18 % remission

