

Contrast Sensor

P1MW002

Part Number



- Compact housing
- Small light spot
- Teach-in, external teach-in
- White light for recognition of any print mark combinations

These sensors have been specially designed to recognize print marks. They have a very small spot and use a white light LED with long service life. Only one sensor is required for the recognition of all color combinations, as well as the difference in brightness between print marks and the background.

Technical Data


Optical Data	
Working Range	10...30 mm
Working Distance	20 mm
Resolution (Gray Scale)	20
Switching Hysteresis	< 5 %
Light Source	White Light
Wavelength	400...700 nm
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	2 × 2,5 mm
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	14 kHz
Response Time	50 µs
Off-Delay	20 ms
Temperature Drift	< 2 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
IO-Link transmission speed	COM2
Protection Class	III
IO-Link Version	1.1
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic, ABS/GF
Optic Cover	Plastic, PMMA
Degree of Protection	IP67
Degree of Protection	IP68
Connection	M12 × 1; 4-pin
NPN NO	●
External teach-in input	●
IO-Link	●
Connection Diagram No.	374
Control Panel No.	A48
Suitable Connection Equipment No.	2

Complementary Products


IO-Link Master
Protective Housing ZSV-0x-01
Set Protective Housing ZSM-NN-02
Software

Ctrl. Panel


A 48



06 = Teach Button
30 = Switching Status/Contamination Warning
68 = Power LED

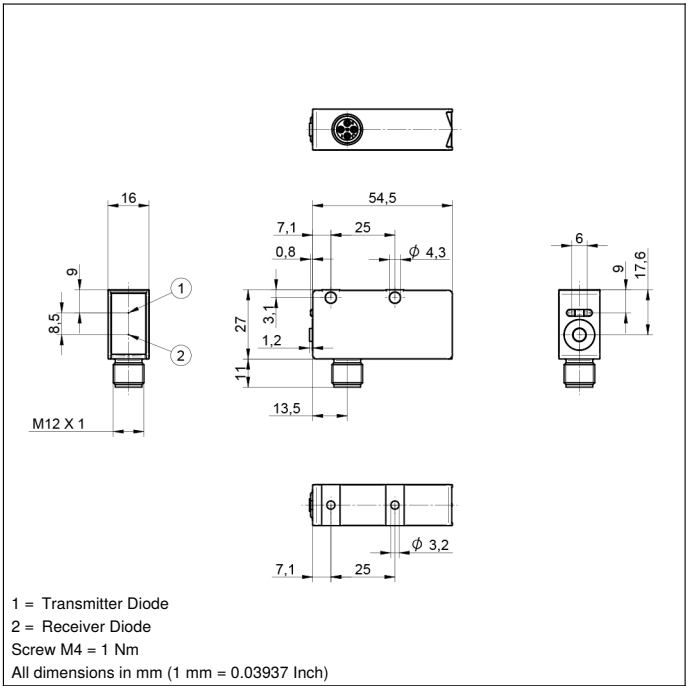

1 = Transmitter Diode
2 = Receiver Diode
Screw M4 = 1 Nm
All dimensions in mm (1 mm = 0.03937 Inch)

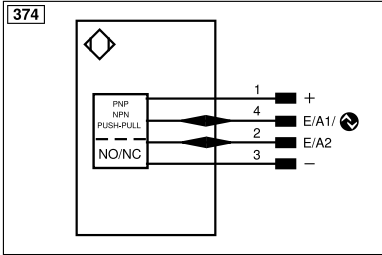

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/A (TTL)		