

Coaxial Spot Light

infrared

LSLI002

Part Number



- Compact M30 standard housing shape with exchangeable lighting modules
- Continuous mode or strobe mode synchronized with the camera
- Ø 8 mm light focusing for use with telecentric coaxial lenses

The LSLx002 spot light is a small illumination with highly focused light for telecentric coaxial or macro lens applications. The illumination can be operated in continuous mode or synchronized with the camera in flash mode OverDrive.

Technical Data

Optical Data

Light Source	Infrared Light
Wavelength	850 nm
Risk Group (EN 62471)	1
Aperture angle	120 °
Infrared light output	6151 W/m ²
Measuring point distance	0 mm

Environmental conditions

Temperature Range	-10...40 °C
Storage temperature	-20...60 °C
Atmospheric humidity	< 80%, non-condensing

Electrical Data

Supply Voltage	21,6...26,4 V DC
Current consumption flash mode OverDrive (operating voltage = 24 V)	0,55 A
Current Consumption Continuous Mode (U _b = 24 V)	0,2 A
Flash duration (max.)	10 ms
Duty cycle (max.)	< 0,2
Dimming	0...10 V ± 100...30%
OverDrive	yes
Rise time	4 µs
Fall time	25 µs
Input signal	NPN
Input signal	PNP
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data



Housing Material	Aluminum, anodised
Housing Material	Plastic, PMMA
Optic Cover	Plastic, PMMA
Degree of Protection	IP50
Connection	M12 × 1; 5-pin

Connection Diagram No.

007

Complementary Products

Connection cables
Lens accessory
Mounting adapter

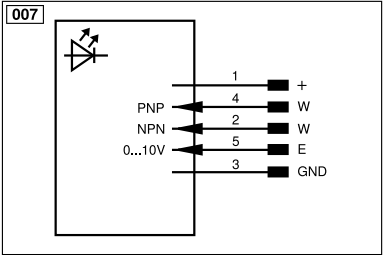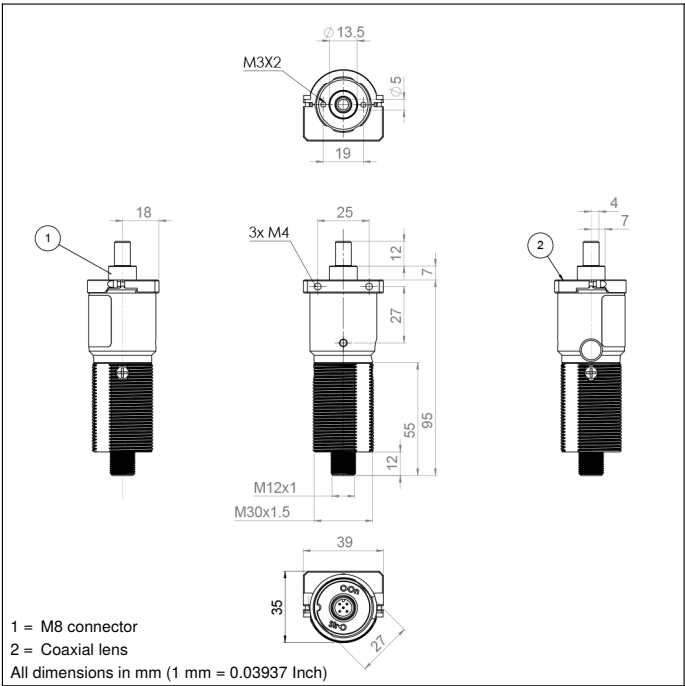

Legend					
+	Supply Voltage +	PT	Platinum measuring resistor	ENAR5422	Encoder A/Ä (TTL)
-	Supply Voltage 0 V	nc	Not connected	ENBR5422	Encoder B/ß (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENa	Encoder A
A	Switching Output (NO)	Ü	Test Input inverted	ENb	Encoder B
Ä	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
Û	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY In	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
R	Reset input	Amv	Valve Output	OLt	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization		
RDY	Ready	E+	Receiver-Line	BK	Black
GND	Ground	S+	Emitter-Line	BN	Brown
CL	Clock	≡	Grounding	RD	Red
E/A	Output/Input programmable	SnR	Switching Distance Reduction	OG	Orange
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	YE	Yellow
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	GN	Green
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	BU	Blue
QSSD	Safety Output	La	Emitted Light disengageable	VT	Violet
Signal	Signal Output	Mag	Magnet activation	GY	Grey
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	WH	White
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring	PK	Pink
				GNYE	Green/Yellow