1D/2D Code Scanner

C5PC006

Part Number

- Auto-button function
- Integrated code reconstruction
- Integrated LED illumination
- PROFINET and EtherNet/IP™
- Web link


These 2D code scanners are suitable for omnidirectional scanning of 1D and 2D codes.

The following code types can be processed:

1D codes: Code39, Code93, Code128, UPC/EAN, BC412, Interleaved 2 of 5, Codabar, Postal Codes, Pharmacode

2D codes: DataMatrix ECC 0...200, PDF417, Micro PDF417, QR-Code, Micro QR-Code, Aztec Code, GS1 Databar, Dot code

Additional code types upon request.

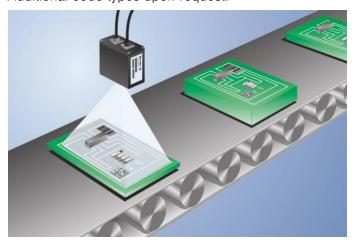

IndustrialEthernet


Technical Data

| Optical Data | |
|------------------------------------|-------------------|
| Barcode Density | Standard density |
| Resolution | 2592 × 1944 Pixel |
| Light Source | White Light |
| Service Life (T = +25 °C) | 50000 h |
| min. Resolution | 0,08 mm |
| Electrical Data | |
| Supply Voltage | 530 V DC |
| Current Consumption (Ub = 24 V) | 150 mA |
| Scan Rate | 5 scans/sec |
| Temperature Range | 045 °C |
| Switching Output | Optoisolator |
| Number of Switching Outputs | 3 |
| Switching Output/Switching Current | 100 mA |
| Reverse Polarity Protection | yes |
| Interface | RS-232/Ethernet |
| Trigger Input | Optoisolator |
| Signal Input | Optoisolator |
| Number of Signal Inputs | 3 |
| Mechanical Data | |
| Setting Method | Ethernet |
| Housing Material | Metal |
| Weight | 68 g |
| Degree of Protection | IP65 |
| Connection | M12 × 1; 12-pin |
| Type of Connection Ethernet | M12 × 1; 8-pin |
| PNP NO/NC switchable | • |
| NPN NO/NC switchable | |
| Ethernet | |
| PROFINET-I/O, CC-B | |
| EtherNet/IP TM | |
| Connection Table No. | 39 |
| Control Panel No. | A24 |
| Suitable Connection Equipment No. | 87 |
| Suitable Mounting Technology No. | 430 |
| | |

Complementary Products

| Connection Cable ZCYV00x |
|------------------------------|
| Connection cable ZDCG005 |
| Path-Folding Mirror ZNNG028 |
| Protective Housing ZSV-0x-01 |
| Software |
| ZC4G002 connection cable |
| ZC4G003 connection cable |
| ZNNG029 Replacement disc |
| ZNNG030 Optical diffuser |
| ZNNG031 Polarization filter |



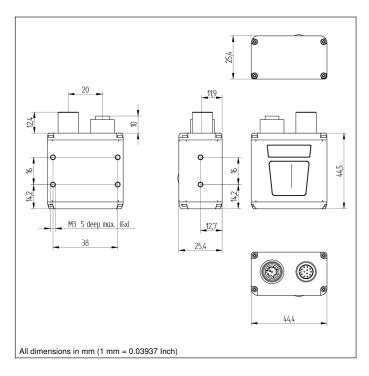

Ctrl. Panel

A24



- 03 = Error Indicator
- 06 = Teach Button
- 36 = Mode Indicator
- 48 = Network Status
- 50 = Good Read
- 68 = supply voltage indicator 70 = Run/Trigger





