Laser Distance Sensor

Time of Flight

OY1P303P0189

LASER

Part Number



- 2 mutually independent switching outputs
- Analog output (0...10 V/4...20 mA)
- Graphical display for easy operation
- Reliable in case of glossy objects with wintec
- Secure detection of black objects also in extremely inclined positions with wintec

These sensors have scratch-resistant optics and the emitted light can be switched off. They use the transit time measurement principle to measure the distance between the sensor and the object.

wenglor interference-free technology (wintec) has revolutionized sensor technology:

It makes it possible to mount several sensors directly next to, or opposite each other without the sensors influencing each other. The sensors reach a very high switching frequency and use laser class 1, which is safe for the human eye.



der wintec.


Technical Data

recillical Data			
Optical Data			
Working Range	503050 mm		
Measuring Range			
Reproducibility maximum	1 mm		
Linearity Deviation (2003050 mm)	7 mm		
Linearity Deviation (50200 mm)	15 mm		
Switching Hysteresis	320 mm		
Light Source	Laser (red)		
Wavelength	660 nm		
Service Life (T = +25 °C)	100000 h		
Laser Class (EN 60825-1)	1		
Max. Ambient Light	10000 Lux		
Beam Divergence	< 2 mrad		
Electrical Data	V E IIII dd		
Supply Voltage	1830 V DC		
Current Consumption (Ub = 24 V)	< 70 mA		
Switching Frequency	250 Hz		
Measuring Rate	1500 /s		
On-/Off-Delay	010000 ms		
Temperature Drift	< 0,4 mm/K		
•	-4050 °C		
Temperature Range	-4050 C		
Number of Switching Outputs Switching Output Voltage Drep			
Switching Output Voltage Drop	< 2,5 V 100 mA		
Switching Output/Switching Current			
Analog Output	420 mA		
Short Circuit Protection	yes		
Reverse Polarity and Overload Protection	yes		
Teach Mode	HT, VT, FT, TP		
Interface	RS-232		
Protection Class	III		
Mechanical Data			
Setting Method	Menu (OLED)		
Housing Material	Plastic		
Optic Cover	PMMA		
Degree of Protection	IP68		
Connection	M12 × 1; 8-pin		
Safety-relevant Data			
MTTFd (EN ISO 13849-1)	344,3 a		
Error Output			
Analog Output			
RS-232 Interface			
Connection Diagram No.	531		
Control Panel No.	X2		
Suitable Connection Equipment No.	89		
Suitable Mounting Technology No.	380		
Display brightness may decrease with age. This does not			
Display prigntness may decrease with age. This goes not			

Display brightness may decrease with age. This does not result in any impairment of the sensor function.


Complementary Products

-	
Analog Evaluation I	Unit AW02
Fieldbus Gateway	ZAGxxxN01, EPGG001
Interface Cable S23	32W3
Protective Housing	ZSV-0x-01
Set Protective House	sing ZSP-NN-02
Software	

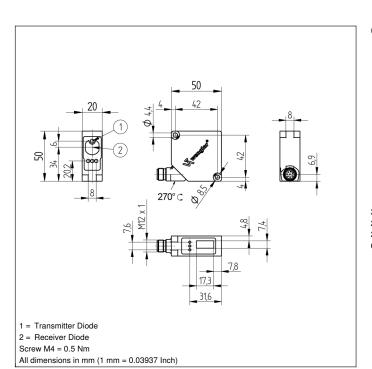

Ctrl. Panel

X2




20 = Enter key

22 = Up key

23 = Down key

60 = display




Legenu					
+	Supply Voltage +	nc	Not connected	ENB _{RS422}	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	ENB	Encoder B
Α	Switching Output (NO)	W	Trigger Input	Amin	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	0	Analog Output	Аок	Digital output OK
⊽	Contamination/Error Output (NC)	0-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
Т	Teach Input	Аму	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	а	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
②	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	ower over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARS422	Encoder A/Ā (TTL)		•

Table 1

Working Distance	0 m	3 m
Light Spot Diameter	5 mm	9 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

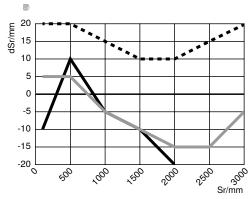

Sr = Switching Distance

dSr = Switching Distance Change

■ black 6 % remission

grey 18 % remission

■■ Aluminum









