

Reflex Sensor with Background Suppression


P1KH031 LASER

Part Number



- Condition monitoring
- Detect extremely small parts starting at 0.1 mm
- High-end
- IO-Link 1.1
- Laser class 1

The reflex sensor with background suppression works with laser light according to the angle measurement principle. It has a IO-Link interface with a data storage function as well as additional configuration and diagnostic options. The interface can also be used to configure the sensors (PNP/NPN, NC/NO, switching distance, error output), as well as for reading out switching statuses and distance values. The teach-in function also provides another configuration option. Two independent switching outputs can be used, for instance, to monitor minimum and maximum values of distances or fill levels and stack heights.

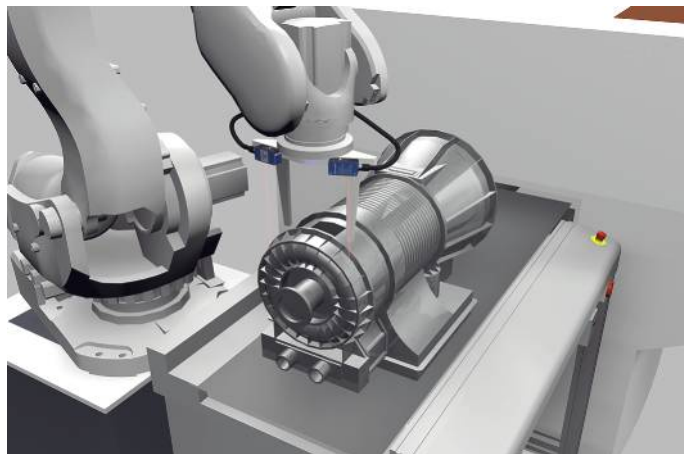


Technical Data

Optical Data	
Range	120 mm
Setting Range	30...120 mm
Switching Hysteresis	< 10 %
Light Source	Laser (red)
Wavelength	680 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	15...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	100 Hz
Switching Frequency (1 Switching Output)	1000 Hz
Response Time	5 ms
Response time (1 switching output)	0,5 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III
FDA Accession Number	1710976-001
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M8 × 1; 4-pin
Optic Cover	PMMA
NPN NO	●
IO-Link	●
Connection Diagram No.	221
Control Panel No.	A23
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400

Complementary Products


IO-Link Master	
Software	

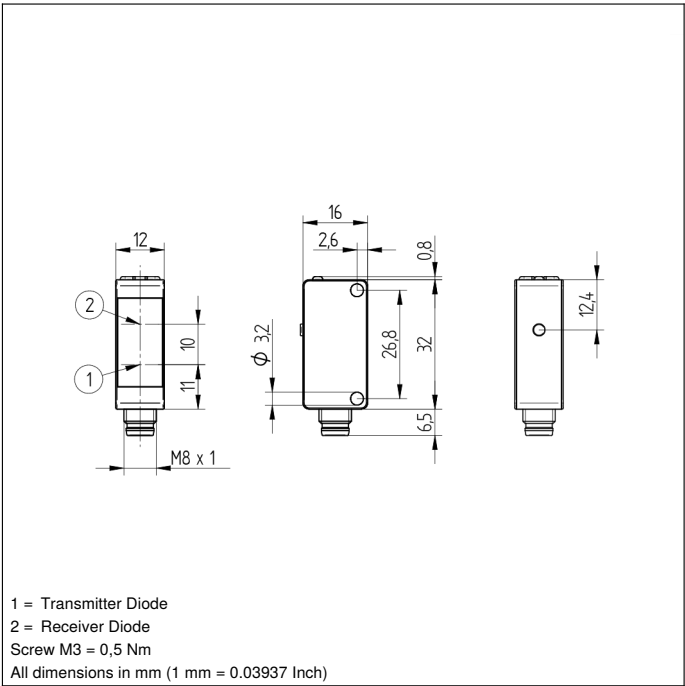


1 = Transmitter Diode
2 = Receiver Diode
Screw M3 = 0,5 Nm
All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel

A 23



06 = Teach Button
30 = Switching Status/Contamination Warning
5a = Switching Status Display, O1
68 = supply voltage indicator
6a = Switching Status Display, O2

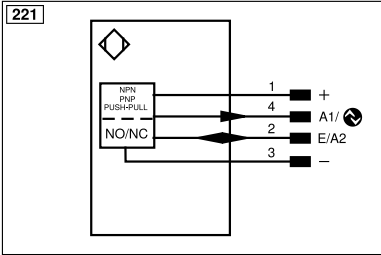


Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENB	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ÿ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/A (TTL)		

Table 1

Detection Range	40 mm	80 mm	120 mm
Light Spot Diameter	2,5 mm	1,5 mm	1 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

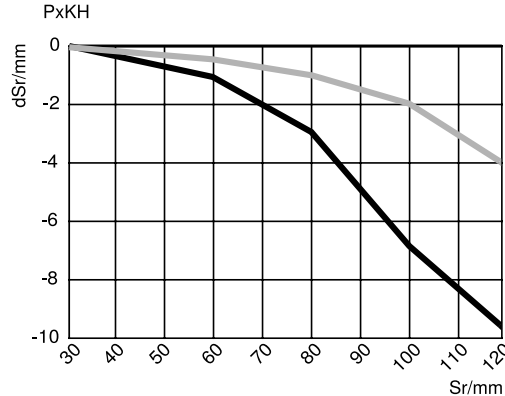

Sr = Switching Distance

dSr = Switching Distance Change

black 6 % remission

grey 18 % remission

