

Retro-Reflex Sensor for Transparent Objects


P1PK104

Part Number



- Dynamic readjustment of the switching threshold
- High-end
- Innovative display unit for alignment and diagnosis
- Special for glass, PET and films
- Wireless settings via NFC

The retro-reflex sensor for clear glass recognition works with red light and a reflector. It has a IO-Link interface with a data storage function as well as additional configuration and diagnostic options. The interface can also be used to configure the sensors (PNP/NPN, NC/NO, switching distance, error output), as well as for reading out switching statuses and signal values. The dynamic readjustment of the switching threshold function automatically adjusts this for contamination, aging or temperature deviations, meaning that these factors have almost no effect on functionality.


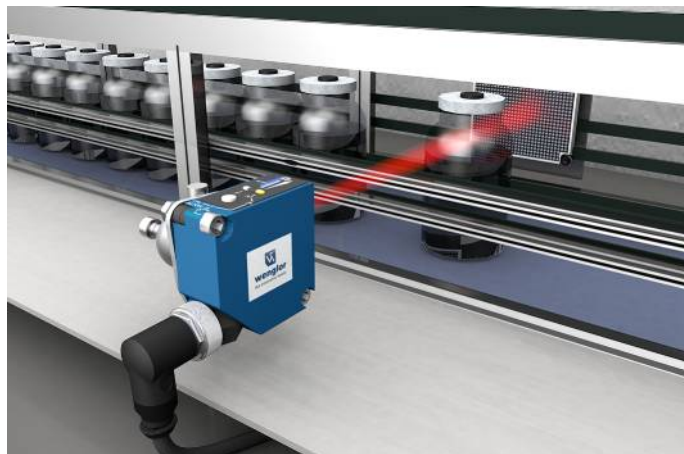


Technical Data

Optical Data	
Range	3500 mm
Reference Reflector/Reflector Foil	RQ100BA
Clear Glass Recognition	yes
Smallest Recognizable Part	see Table 2
Switching Hysteresis	< 5 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	15...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	1000 Hz
Switching frequency (speed mode)	2000 Hz
Response Time	0,5 ms
Response time (speed mode)	0,25 ms
Temperature Drift	< 3 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Teach Mode	NT, MT
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III
Mechanical Data	
Setting Method	Teach-in/NFC
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4-pin
Optic Cover	PMMA
Contamination Output	●
IO-Link	●
NPN NO	●
NFC interface	●
Connection Diagram No.	221
Control Panel No.	A36
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	380

Complementary Products

IO-Link Master
Reflector, Reflector Foil
Set Protective Housing Z1PS001
Software

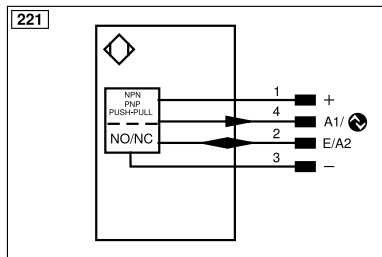

Legend					
+	Supply Voltage +	nc	Not connected	EN _{RS422}	Encoder B/B̄ (TTL)
-	Supply Voltage 0 V	U	Test Input	EN _A	Encoder A
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	EN _B	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	ACK	Digital output OK
ȳ	Contamination/Error Output (NC)	Q-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization		
RDY	Ready	E+	Receiver-Line	BK	Black
GND	Ground	S+	Emitter-Line	BN	Brown
CL	Clock	±	Grounding	RD	Red
E/A	Output/Input programmable	SnR	Switching Distance Reduction	OG	Orange
	IO-Link	Rx+/-	Ethernet Receive Path	YE	Yellow
PoE	Power over Ethernet	GND	Ground	GN	Green
IN	Safety Input	Tx+/-	Ethernet Send Path	BU	Blue
QSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
Signal	Signal Output	La	Emitted Light disengageable	GY	Grey
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation	WH	White
EN _{0 RS422}	Encoder 0-pulse 0/0̄ (TTL)	RES	Input confirmation	PK	Pink
PT	Platinum measuring resistor	EDM	Contacteur Monitoring	GNYE	Green/Yellow
		EN _{AR422}	Encoder A/Ā (TTL)		

Working Distance	0,3 m	1,7 m	3,5 m
Light Spot Diameter	20 mm	55 mm	110 mm

Distance, Sensor to Reflector	0,3 m	1,7 m	3,5 m
Smallest Recognizable Part	1 mm	5 mm	10 mm

Reflector type, mounting distance

RQ100BA	0...3,5 m	RR25KP	0...0,5 m
RE18040BA	0...2,5 m	RR21_M	0...0,7 m
RQ84BA	0...3 m	Z90R005	0...1,8 m
RR84BA	0...3,5 m	ZRAE02B01	0...1,5 m
RE9538BA	0...1,4 m	ZRME01B01	0...0,35 m
RE6151BM	0...2,8 m	ZRME03B01	0...1,5 m
RR50_A	0...2,5 m	ZRMR02K01	0...0,5 m
RE6040BA	0...2,8 m	ZRMS02_01	0...0,7 m
RE8222BA	0...1,6 m	RF508	0...0,7 m
RR34_M	0...1,8 m	RF258	0...0,7 m
RE3220BM	0...1,1 m	ZRDF__K01	0...2,2 m
RE6210BM	0...0,8 m	Z91R001	0...1,5 m
RR25_M	0...1 m	ZRDF10K01	0...2,4 m