

Retro-Reflex Sensor for Transparent Objects

OKM453C0302

Part Number




- Compact housing
- No blind spot
- Recognition of clear glass
- Teach-in, external teach-in

Technical Data


Optical Data	
Range	4500 mm
Reference Reflector/Reflector Foil	RQ100BA
Clear Glass Recognition	yes
Switching Hysteresis	< 5 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	3 °
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 40 mA
Switching Frequency	2 kHz
Response Time	250 μs
On-/Off-Delay (RS-232)	0...5 s
Temperature Drift	< 5 %
Temperature Range	-10...60 °C
Switching Output Voltage Drop	< 2,5 V
NPN Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Teach Mode	NT, MT
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
NPN NC	●
RS-232 with Adapterbox	●
Connection Diagram No.	352
Control Panel No.	M3
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	360

Retro-reflex sensors must be used in combination with a reflector and even crystal-clear objects and sheet products can be reliably recognized.

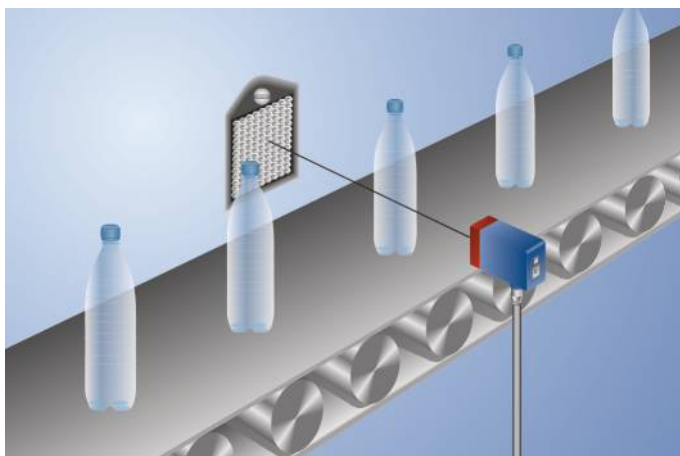


Complementary Products

Adapterbox A232
Protective Housing ZSV-0x-01
Reflector, Reflector Foil
Set Protective Housing ZSM-NN-02

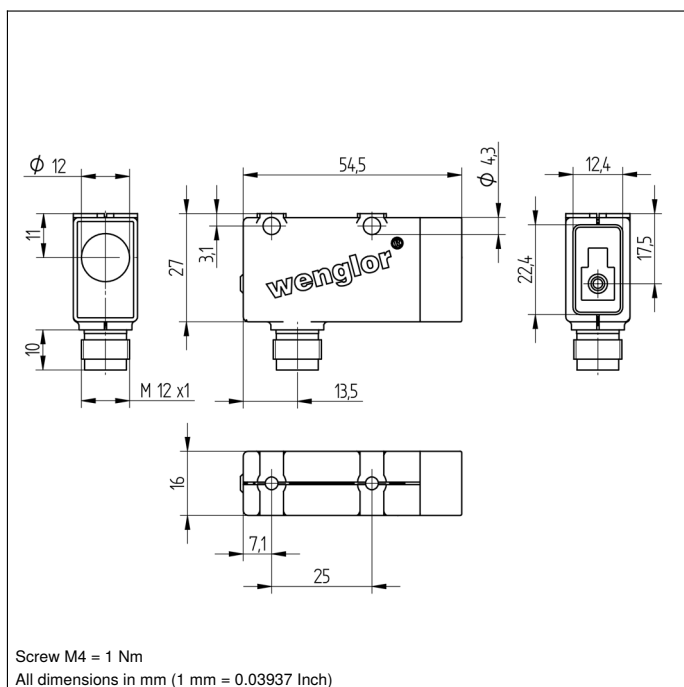


Ctrl. Panel

M3



06 = Teach Button
30 = Switching Status/Contamination Warning

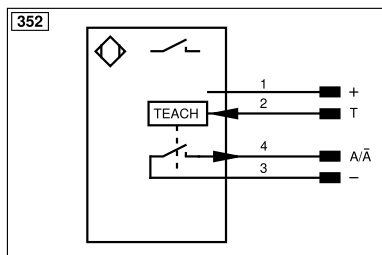

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	⊕	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link		Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/Ā (TTL)
		ENBRs422	Encoder B/B̄ (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		ACK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...4,5 m	RE6210BM	0...1 m
RE18040BA	0...3 m	RR25_M	0...1,2 m
RQ84BA	0...3,5 m	RR25KP	0...0,8 m
RR84BA	0...4 m	RR21_M	0...1 m
RE9538BA	0...1,5 m	ZRAE02B01	0...2 m
RE6151BM	0...3,6 m	ZRME01B01	0...0,6 m
RR50_A	0...2,3 m	ZRME03B01	0...2,1 m
RE6040BA	0...3,5 m	RF505	0...1,2 m
RE8222BA	0...2 m	RF508	0...1,1 m
RR34_M	0...1,8 m	RF258	0...1 m
RE3220BM	0...1,2 m	ZRDF_K01	0...3 m

