


SG4-30IE165C1

订货号



- 串行接口
- 固定抑制、浮动抑制、降低的分辨率、级联、暂时失效
- 集成全体电子元件

安全光帘以其紧凑的结构样式见长。另外它还有大量的附加功能，并可以适应于各种应用情况。紧固角BEF-SET-33已经包含在供货范围内。

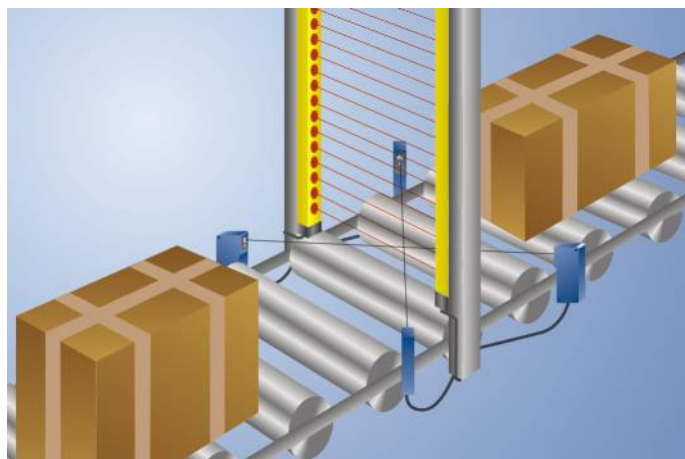

技术数据

光学数据

作用范围	0,5...20 m
防护区高度(SFH)	1680 mm
分辨率	30 mm
光线类型	红光
张角	± 2,5 °

电气数据

传感器型号	接收器
供电电压	24 V DC
电流消耗(U _b = 24 V)	300 mA
响应时间	25,8 ms
温度范围	-20...50 °C
储藏温度	-25...70 °C
安全输出端数量 (OSSDs)	2
安全输出端压降	< 2,5 V
PNP安全输出端开关电流	300 mA
信号输出端数量	1
信号输出端压降	< 2,5 V
信号输出端开关电流	200 mA
抗短路和防过载	是
反极性保护	是
接口	RS-485
防护等级	III

机械数据

外壳材料	铝
玻璃材质	聚碳酸酯
防护等级	IP67
连接方式	M12 × 1 ; 8针

安全技术数据

电敏保护设备类型(EN 61496)	4
安全类别(EN ISO 13849-1)	4
性能等级(EN ISO 13849-1)	PL e
PFHD	3.08 × E-8 1/h
使用寿命 TM (EN ISO 13849-1)	20 a

功能

手部防护	是
重启锁	是
接触器监控	是
串联	是
固定抑制	是
浮动抑制	是
降低的分辨率	是
串行通信	是


接线表编号	28
操作面板编号	S4
适当的连接技术编号	88 88s
适当的紧固技术编号	700
适当的接口插头编号	11

适当的发送器

SG4-30IS165C1

补充的产品

安全继电器SG4-00VA000R2, SR4B3B01S, SR4D3B01S
带有转向镜的防护柱SZ000EU215NN01
带有防护板的防护柱SZ000EG215NN01
暂时失效发报器SM0-00CA000C1
激光对准工具SZ0-LAH1
转向镜Z2UG004
软件
软件 wsafe



A diagram of a control panel. At the top is a digital display showing the number '88'. Below the display are four circular buttons arranged in a 2x2 grid, labeled 55 (top-left), 03 (top-right), 53 (bottom-left), and 52 (bottom-right). Below these buttons is a numeric keypad with ten buttons (0-9) arranged in a 3x4 grid. The keypad is labeled 56 at the bottom right. The entire panel is labeled S4 at the top left.

- 03 = 错误指示器
20 = 回车键
52 = OSSD ON
53 = OSSD OFF
55 = 消隐
56 = Dip开关
60 = 指示器