


SG4-30IE120C1

订货号



- 串行接口
- 固定抑制、浮动抑制、降低的分辨率、级联、暂时失效
- 集成全体电子元件

安全光帘以其紧凑的结构样式见长。另外它还有大量的附加功能，并可以适应于各种应用情况。紧固角BEF-SET-33已经包含在供货范围内。

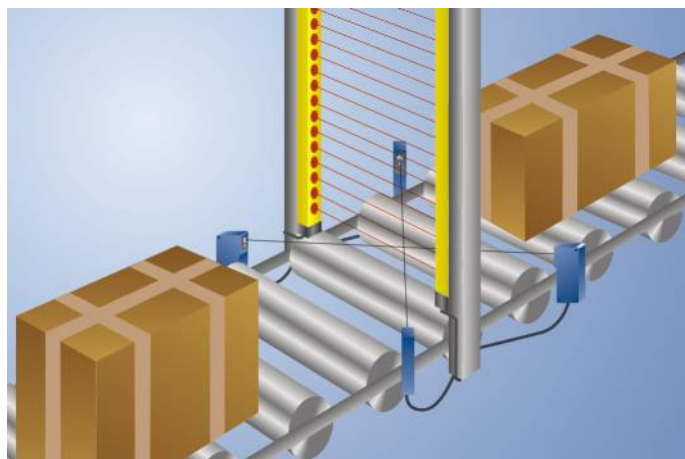

技术数据

光学数据

作用范围	0,5...20 m
防护区高度(SFH)	1230 mm
分辨率	30 mm
光线类型	红光
张角	± 2,5 °

电气数据

传感器型号	接收器
供电电压	24 V DC
电流消耗(U _b = 24 V)	300 mA
响应时间	18,5 ms
温度范围	-20...50 °C
储藏温度	-25...70 °C
安全输出端数量 (OSSDs)	2
安全输出端压降	< 2,5 V
PNP安全输出端开关电流	300 mA
信号输出端数量	1
信号输出端压降	< 2,5 V
信号输出端开关电流	200 mA
抗短路和防过载	是
反极性保护	是
接口	RS-485
防护等级	III

机械数据

外壳材料	铝
玻璃材质	聚碳酸酯
防护等级	IP67
连接方式	M12 × 1 ; 8针

安全技术数据

电敏保护设备类型(EN 61496)	4
安全类别(EN ISO 13849-1)	4
性能等级(EN ISO 13849-1)	PL e
PFHD	3.08 × E-8 1/h
使用寿命 TM (EN ISO 13849-1)	20 a

功能

手部防护	是
重启锁	是
接触器监控	是
串联	是
固定抑制	是
浮动抑制	是
降低的分辨率	是
串行通信	是


接线表编号	28
操作面板编号	S4
适当的连接技术编号	88 88s
适当的紧固技术编号	700
适当的接口插头编号	11

适当的发送器

SG4-30IS120C1

补充的产品

安全继电器SG4-00VA000R2, SR4B3B01S, SR4D3B01S
带有转向镜的防护柱SZ000EU170NN01
带有防护板的防护柱SZ000EG170NN01
暂时失效发报器SM0-00CA000C1
激光对准工具SZ0-LAH1
转向镜Z2UG003
软件
软件 wsafe



A diagram of a control panel with a grey background. At the top left is a blue rectangular button labeled 'S4'. Below it is a vertical column of four circular buttons labeled 60, 55, 53, and 52 from top to bottom. To the right of the 55 button is another circular button labeled 03. At the top center is a rectangular digital display showing '88'. At the bottom center is a vertical stack of eight rectangular buttons, with the bottom-most button labeled 56.

- 03 = 错误指示器
20 = 回车键
52 = OSSD ON
53 = OSSD OFF
55 = 消隐
56 = Dip开关
60 = 指示器