



- Condition monitoring
- High switching frequency
- Large detection range
- Robust stainless steel housing with IP69K

The reflex sensor works with red light according to the principle of energy and is designed to detect objects without a background. The switching distance is set for a given object. Note that: Bright objects reflect transmitted light better than dark objects. Dark (matte) objects can also be differentiated from bright (glossy) objects. This means that presence or stack height checks can be conducted or counting tasks carried out. The IO-Link interface can be used to configure retro-reflex sensors (PNP/NPN, NC/NO, switching distance), as well as to output switching statuses and distance values. The robust V4A (1.4404/316L) stainless steel housing is resistant to oils and coolants, as well as cleaning agent.




Technical Data

Optical Data	
Range	700 mm
Switching Hysteresis	< 10 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table
Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Switching Frequency	500 Hz
Switching frequency (speed mode)	1000 Hz
Response Time	1 ms
Response time (speed mode)	0,5 ms
Temperature Drift	< 10 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Stainless steel 316L
Degree of Protection	IP68/IP69K
Connection	M8 × 1; 4-pin
Optic Cover	PMMA
Ecolab	yes
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2584,53 a
IO-Link	●
PNP NO/NC antivalent	●
Connection Diagram No.	215
Control Panel No.	1K1
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400

Complementary Products


IO-Link Master
Software

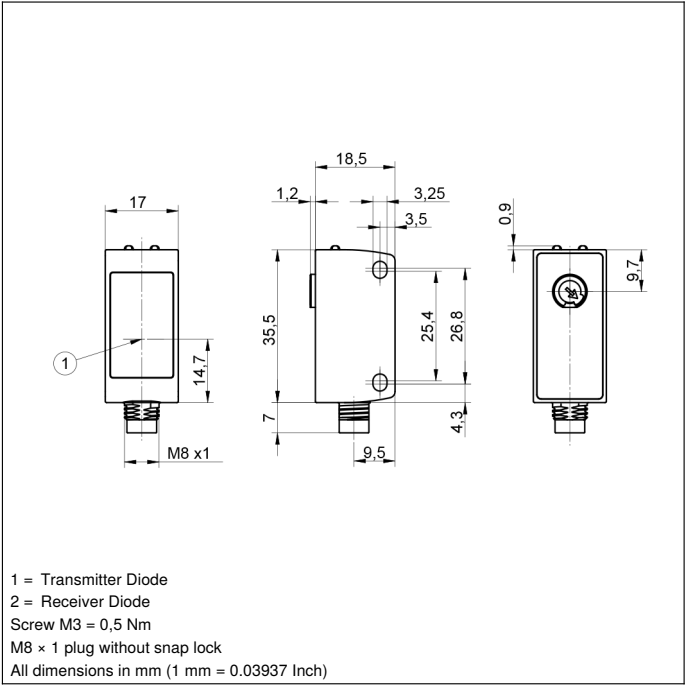


1 = Transmitter Diode
2 = Receiver Diode
Screw M3 = 0,5 Nm
M8 x 1 plug without snap lock
All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel

1K1



05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning
68 = supply voltage indicator

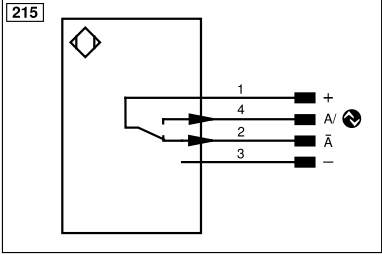

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ů	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENAR422	Encoder A/A (TTL)		

Table 1

Detection Range	100 mm	300 mm	700 mm
Light Spot Diameter	20 mm	40 mm	80 mm