wenglor
the innovative family


Technical Data

# S49-10M
# Connection Line

M8 × 1; 3-pin



c UL us LISTED
IND. CONT. EQ
72HL / E189727
For use in class 2 circuits




EN

Dimensions in mm
Subject to change without notice
Version 0
**www.wenglor.com**

## Technical data


| Electrical Data | |
|---|---|
| Supply Voltage | ≤ 63 V AC/DC |

| Mechanical Data | |
|---|---|
| Connection 1 | Socket, straight |
| Connection mode 1 | M8 × 1, 3-pin |
| Connection 2 | stripped |
| Torque | M8: 0,3 Nm |
| Cable length (L) | 10 m |
| Outer diameter (d) | 5 mm |
| Wire cross-section | 0.34 mm² |
| Degree of Protection | IP67 |
| Temperature Range | -25...80 °C |
| Cable Jacket Material | Plastic, PVC |
| Material Wire Insulation | Plastic, PVC |
| Material Sleeve Nut | Brass, nickel-plated |

| General Data | |
|---|---|
| Scope of delivery | 1 × line |
| Packaging unit | 1 Piece |

* Per terminal

## Technical illustrations

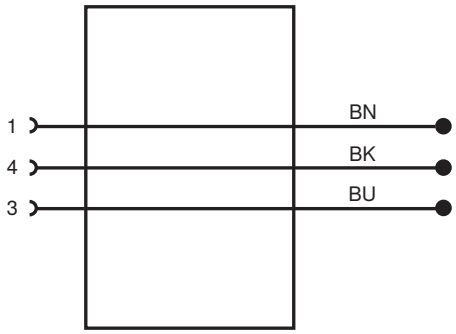


| Pin | Wire color |
|---|---|
| 1 | Brown |
| 3 | Blue |
| 4 | Black |