


Safety Light Curtain

Finger Protection

SEFG534



The safety light curtain can be flexibly integrated into systems thanks to the well-conceived mounting technology and the compact housing. Alignment of the emitter and the receiver is simplified by the visible red light and the signal strength display. User-friendly wTeach2 software make settings and diagnosis via the IO-Link interface extremely easy. Settings can be subsequently saved to a microSD card and quickly duplicated on other products. Extensive muting functions guarantee an ideal solution for every application in order to safely transport objects into and out of the danger zone.

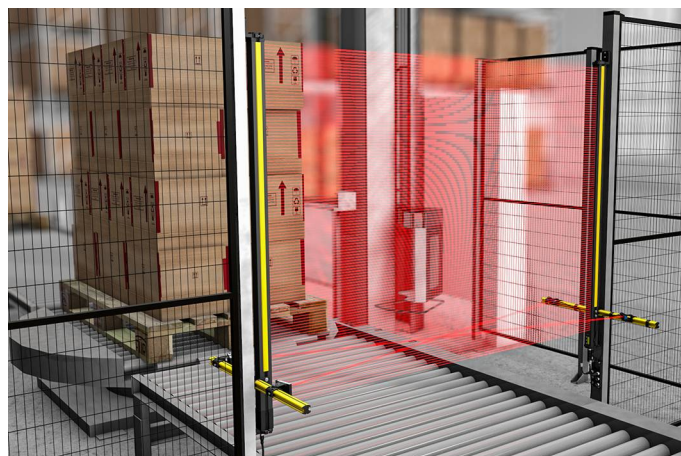

Optical Data	
Range	0,25...7 m
Housing Length (L)	709 mm
Safety Field Height (SFH)	610 mm
Resolution	14 mm
Light Source	Red Light
Wavelength	630 nm
Opening Angle	± 2,5 °
Electrical Data	
Sensor Type	Emitter
Supply Voltage	19,2...28,8 V DC
Current Consumption (U _b = 24 V)	≤ 100 mA
Response Time	14,4 ms
Temperature Range	-30...55 °C
Storage temperature	-30...70 °C
Protection Class	III
Mechanical Data	
Housing Material	Aluminum, anodised
Optic Cover	Plastic, PC
Degree of Protection	IP65
Degree of Protection	IP67
Connection	M12 × 1; 5-pin
Safety-relevant Data	
ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
PFHD	≤ 1.8 × 10 ⁻⁸
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL 3
Safety Integrity Level (EN 62061)	SILCL 3
Function	
Finger Protection	yes
Scope of delivery	1 × safety light curtain
IO-Link	
Connection Diagram No.	1031
Suitable Connection Equipment No.	35
Suitable Mounting Technology No.	701 810 860 870 880

Suitable Receiver


SEFG634

Complementary Products

Deflection mirror Z0030
Protection column with Z2SU001 deflection mirror
Protection columns with/without protective screen (Z2SS001/ Z2SM001)

Ctrl. Panel

A38

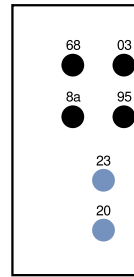

- 03 = Error Indicator
- 68 = Power LED
- 8a = coding
- 95 = Diagnosis/Large Detection Range

