
wenglor
the innovative family

Technical Data
UF87PCV3
Fiber-optic amplifier



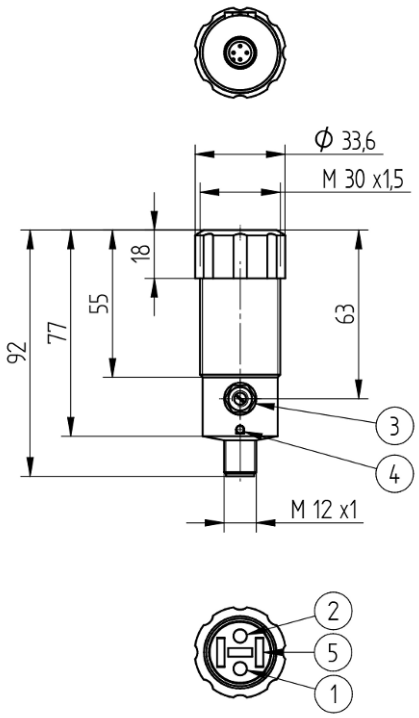

Symbol	Key
1	Emitter diode
2	Receiver diode
3	Switching distance adjuster
4	Switching status indicator/contamination warning
5	NC/NO switch

EN

Dimensions in mm
Subject to change without notice
Version 0
www.wenglor.com

Technical data

Optical Data	
Range	3000 mm
Switching Hysteresis	< 15 %
Light Source	Infrared, LED
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	12 °

Electrical Data	
Current Consumption (Ub = 24 V)	< 40 mA
Switching Frequency	100 Hz
Response Time	5 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 µA
PNP Contamination Output/Switching Current	50 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data	
Setting Method	Potentiometer
Housing Material	Brass, nickel-plated
Optic Cover	Plastic, PC
Full Encapsulation	yes
Degree of Protection	IP65
Connection Type	Plug variant
Connection	M12 × 1; 4-pin


General Data	
Scope of delivery	1 × initial start-up instructions 1 × sensor 1 × UEM30KU-01 sleeve nut 2 × MUTTER-M30-E001 hex nuts

Adjustable parameters	
Circuit	NC NC/NO NO

BMECat data	
eCl@ss 5.1.4	27-27-09-05 Optical fiber sensor

BMECat data	
eCl@ss 6.x	27-27-09-05 Optical fiber sensor
eCl@ss 7.0	27-27-09-05 Optical fiber sensor
eCl@ss 7.1	27-27-09-05 Optical fiber sensor
eCl@ss 8.x	27-27-09-05 Optical fiber sensor
eCl@ss 10.0.1	27-27-09-05 Optical fiber sensor

Technical illustrations

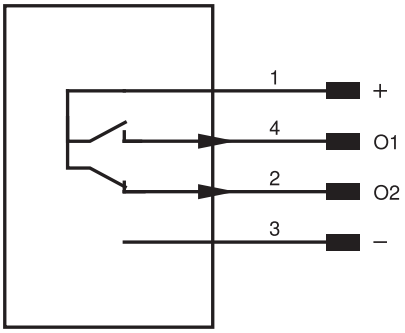

Pin	Pin function	Polarity	Circuit
1	Supply Voltage +		
2	Switching Output 2	PNP	NC
3	Supply voltage 0 V		
4	Switching Output 1	PNP	NO

