

Laser Distance Sensor

Triangulation

YP11MGVL80


LASER

Part Number



- **Linearity: 0,5 %**
- **Measuring range: 50 mm**
- **Resolution up to 20 μm**

These sensors can measure distances and display analog output. Their high resolution and wide variety of measuring ranges allow them to be used in innumerable applications. The output signal is practically independent of the object's color.

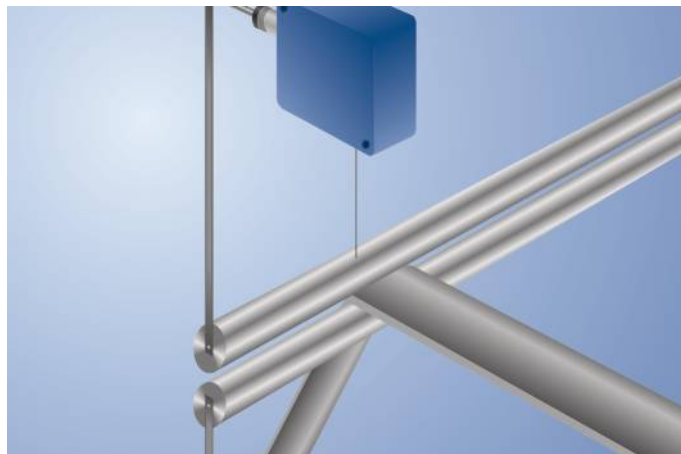

Technical Data


Optical Data	
Working Range	50...100 mm
Measuring Distance	75 mm
Measuring Range	50 mm
Resolution	25 μm
Linearity	0,5 %
Linearity Deviation	250 μm
Light Source	Laser (red)
Wavelength	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Light Spot Diameter	1 mm
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Cut-Off Frequency	100 Hz
Response Time	5 ms
Temperature Drift (T _u < 10 °C, T _u > 40 °C)	20 $\mu\text{m/K}$
Temperature Drift (10 °C < T _u < 40 °C)	10 $\mu\text{m/K}$
Temperature Range	-10...60 °C
Error Output Voltage Drop	< 2,5 V
PNP Error Output/Switching Current	200 mA
Analog Output	0...10 V
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 8-pin
Error Output	●
Analog Output	●
Connection Diagram No.	503
Control Panel No.	P3
Suitable Connection Equipment No.	80
Suitable Mounting Technology No.	380

Complementary Products


Analog Evaluation Unit AW02
Protective Housing ZSV-0x-01
Set Protective Housing ZSP-NN-02

Ctrl. Panel


P3



03 = Error Indicator
12 = Analog Output Indicator

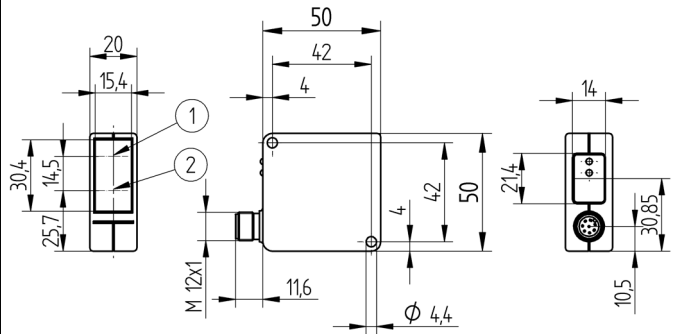


1 = Transmitter Diode
2 = Receiver Diode
Screw M4 = 1 Nm
All dimensions in mm (1 mm = 0.03937 Inch)

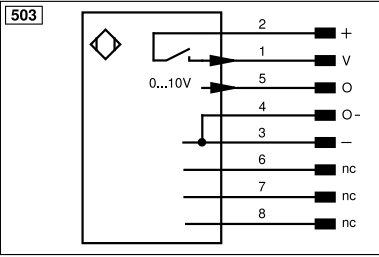

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link		Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARIS422	Encoder A/Ā (TTL)
		ENBRIS422	Encoder B/B̄ (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Error of Measurement

Typical characteristic curve based on white, 90 % remission

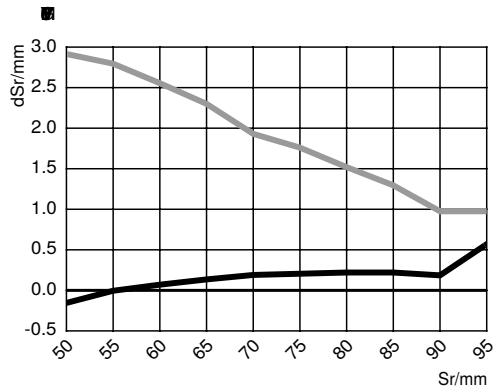

Sr = Switching Distance
dSr = Switching Distance Change
— black 6 % remission
— Aluminum

