

接线盒
适用于C5PC/FIS-0830/FIS-0870

ZAA12NN01


订货号



技术数据

电气数据	
供电电压	18...28 V DC
机械数据	
防护等级	IP65
包装箱	1件
接线表编号	40
适当的连接技术编号	12

- 防护等级IP65

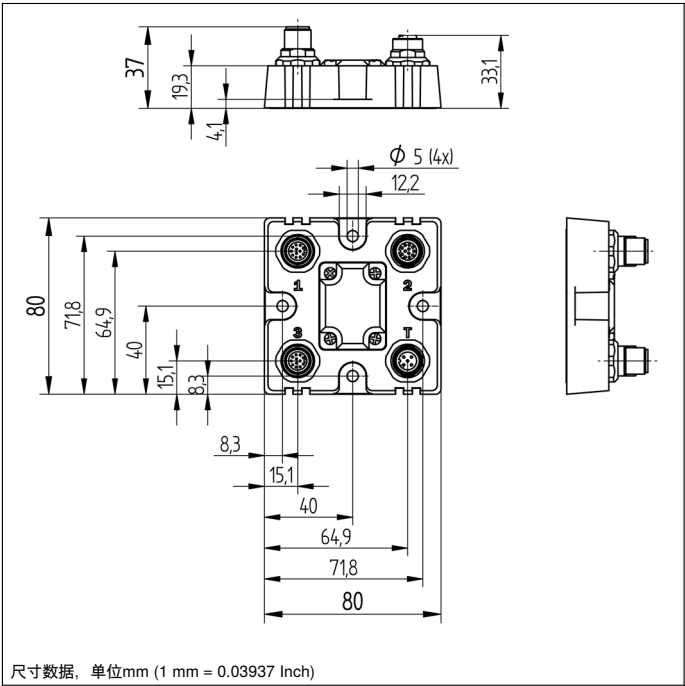


Connector 1,2,3


PIN	Signal	In/Out
1	Trigger	In
2	Power	
3	Default	
4	New Master	
5	Output 1	Out
6	Output 3	Out
7	Ground	
8	Input Commen	
9	Receive Data (RS-232)	In
10	Transmit Data (RS-232)	Out
11	Output 2	Out
12	Output Commen	Out

Connector T


PIN	Signal
1	Power 10...28 V DC
2	Trigger/New Master/Input 1 Commen
3	Ground
4	Trigger

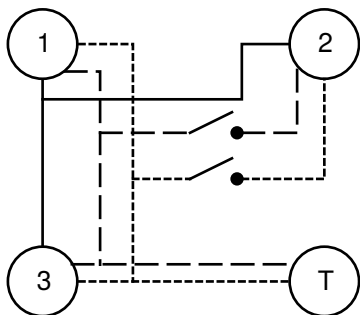

COMM-I/O TRIGGER
 POWER



1, 2, 3



T