wenglor
the innovative family

Technical Data

P3PC242

Laser Distance Sensor

Triangulation

inspect award 2024




LASER CLASS 2
EN 60825-1

c UL us LISTED
IND. CONT. EQ
72HL / E189727
For use in class 2 circuits

RoHS

UK CA

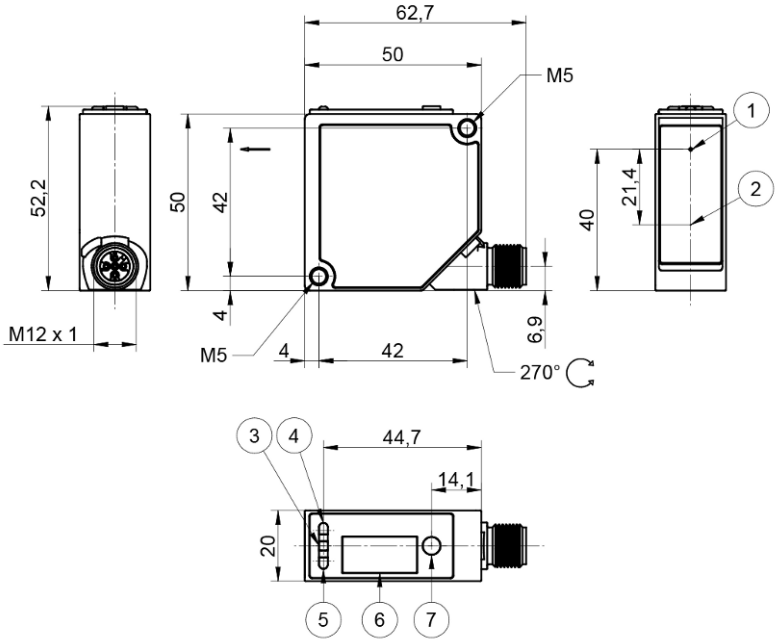

Symbol	Key
1	Emitter diode
2	Receiver diode
3	Power LED
4	Indicator analog output AO
5	Switching status indicator O1
6	Indicator
7	Enter button

EN

Dimensions in mm
Subject to change without notice
Version 1
www.wenglor.com

Technical data

Optical Data	
Working Range	50...350 mm
Measuring Range	50...350 mm
Reproducibility maximum	100 µm
Reproducibility: 1 Sigma	10 µm
Linearity Deviation	300 µm
Light Source	Laser, blue
Wavelength	405 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	5000 Lux
Light Spot Diameter	see table 1

Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	< 70 mA
Measuring Rate	2500 /s
Response Time	< 0.5 ms
Temperature Drift	< 20 µm/K
Temperature Range	0...60 °C
Analog Output	0...10 V
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
IO-Link Version	1.1
IO-Link transmission speed	COM3
Protection Class	III
FDA Accession Number	2310698-000

Mechanical Data	
Setting Method	(OLED)/Bluetooth menu
Housing Material	Aluminum, anodised Plastic, ABS
Degree of Protection	IP67
Connection Type	Plug variant
Connection	M12 × 1; 5-pin
Optic Cover	Plastic, PMMA

Safety-relevant Data	
MTTFd (EN ISO 13849-1)	398.5 a

General Data	
Scope of delivery	1 × initial start-up instructions 1 × sensor


Adjustable parameters	
Output	Error Output Push-pull NPN PNP
Analog output	0...10 V 4...20 mA
Circuit	NC NC/NO NO
Other parameters	Exposure time Laser light Switching hysteresis Teach-in mode Off-delay On-delay

All other parameters can be found in the product documentation.

Display brightness may decrease with age. This does not result in any impairment of the sensor function.

BMECat data	
eCl@ss 5.1.4	27-27-09-04 Light scanner w. background masking
eCl@ss 6.x	27-27-09-04 Light scanner w. background masking
eCl@ss 7.0	27-27-09-04 Light scanner w. background masking
eCl@ss 7.1	27-27-09-04 Light scanner w. background masking
eCl@ss 8.x	27-27-09-04 Light scanner w. background masking
eCl@ss 10.0.1	27-27-09-04 Light scanner w. background masking

Technical illustrations

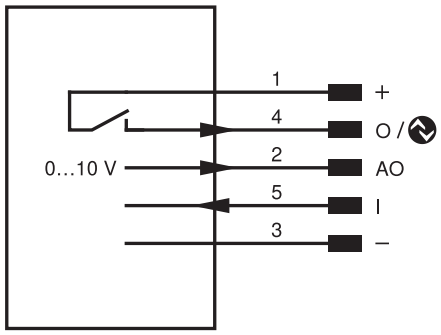

Pin	Pin function	Polarity	Circuit	Signal type
1	Supply Voltage +			
2	Analog output			0...10 V
3	Supply voltage 0 V			
4	Switching output IO-Link	PNP	NO	
5	Switchable emitted light	High active		

Table 1			
Working Distance	50 mm	200 mm	350 mm
Light Spot Diameter	1,5 mm	1 mm	1 mm