
Bar Light IP69K
infrared, 750 mm

LB9I701
Part Number

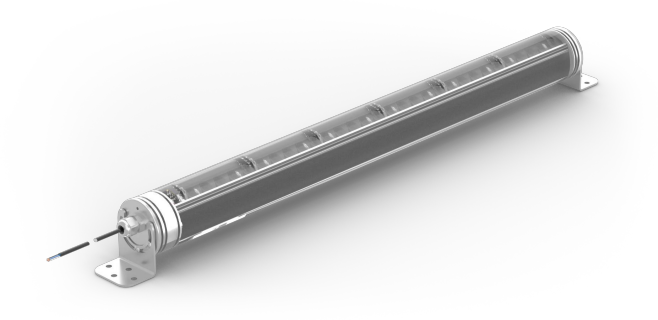

- **Certified for wash-down environments (DIN 400 50 Part 9)**
- **Industry-leading performance of the LBA bar light**
- **Mounting bracket included in scope of delivery**
- **No external control required**


wenglor's LB9 series bar lights are industrial IP69K lights with food-safe housing. Suitable for environments that require high-pressure/high-temperature cleaning with steam and cleaning chemicals. The homogeneous and intense luminous flux of the illumination device enables many types of applications with working distances in the near and far range. The LB9 bar lights can be used in continuous mode or synchronized with the machine vision camera in strobe mode via PNP or NPN inputs. The standard L-brackets enable 360° rotation for easy installation.

Technical Data


Optical Data	
Light Source	Infrared, LED
Wavelength	850 nm
Risk Group (EN 62471)	1
Beam angle	± 17 °
Infrared light output	95,75 W/m²
Measuring point distance	200 mm
Environmental conditions	
Temperature Range	-20...60 °C
Storage temperature	-20...60 °C
Atmospheric humidity	< 80%, non-condensing
Electrical Data	
Supply Voltage	21,6...26,4 V DC
Power	67,6 W
Current Consumption Continuous Mode (Ub = 24 V)	3,6 A
Rise time	15 µs
Fall time	10 µs
Input signal	NPN
Input signal	PNP
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Dimming	0...10 V ≙ 100...30%
OverDrive	no
Mechanical Data	
Luminous Field Length (L)	750 mm
Housing Material	Plastic, PMMA
Housing Material	Stainless steel, V4A (1.4404/316L)
Degree of Protection	IP69K
UL Enclosure Type	1
Optic Cover	Plastic, PMMA
Connection	Cable; 5-wire
Cable length (L)	5 m
Cable Jacket Material	Plastic, PUR
Max. cable lenght	27 m
Outer diameter (d)	5,4 mm
Function	
Operating modes	Continuous, Strobe
Connection Diagram No.	007

Complementary Products

ZC4G003 connection cable
ZDCG004 connection cable
ZDCG005 connection cable

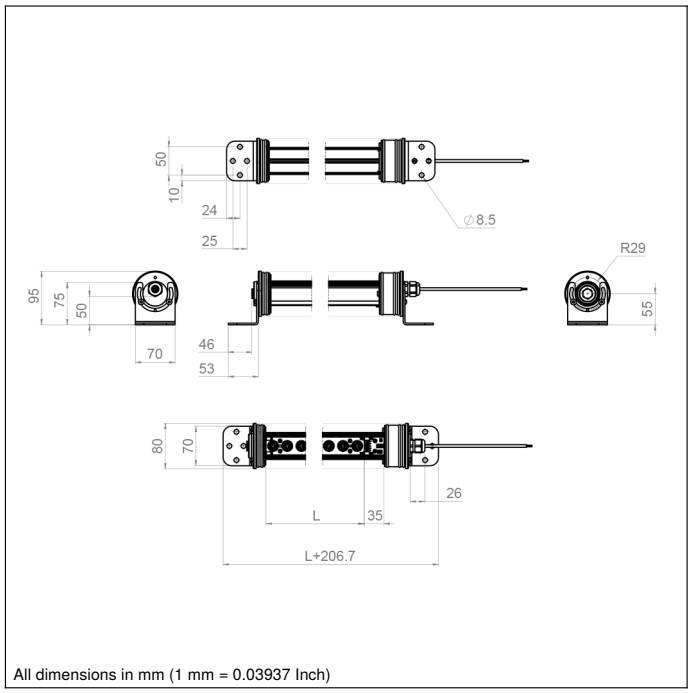

All dimensions in mm (1 mm = 0.03937 Inch)

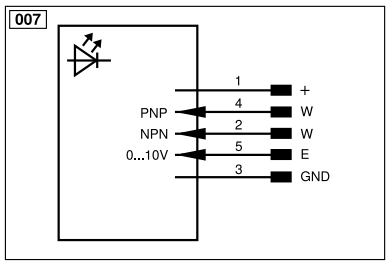

Legend					
+	Supply Voltage +	PT	Platinum measuring resistor	ENARS422	Encoder A/Ā (TTL)
–	Supply Voltage 0 V	nc	Not connected	ENBRS422	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENA	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	ENB	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W–	Ground for the Trigger Input	AMAX	Digital output MAX
V̄	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O–	Ground for the Analog Output	SY In	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
R	Reset input	AMV	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY–	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	⏚	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
	IO-Link	Rx+/–	Ethernet Receive Path	GN	Green
PoE	ower over Ethernet	Tx+/–	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(–)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/–	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
EN0 RS422	Encoder 0-pulse 0/0̄ (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow

Specifications are subject to change without notice V0-14.09.2026