
EN

Information for Operation Instruction

Reflex Sensor with background suppression
CP70QXVT35S847

- On-Delay preset to 20 ms
- Off-Delay preset to 20 ms
- Switching Distance preset to 450 mm
- Window Teach-/in preset to 30 mm ± 30 mm


Changed Control Panel:

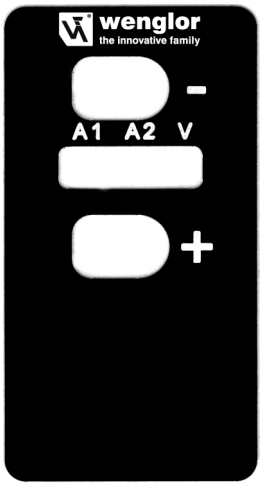

⊖	=	Minus key/LED
⊕	=	Plus key/LED
A1; A2; V	=	LEDs for Output 1, Output 2 and Error Output

Changed Switching Diagram:

524

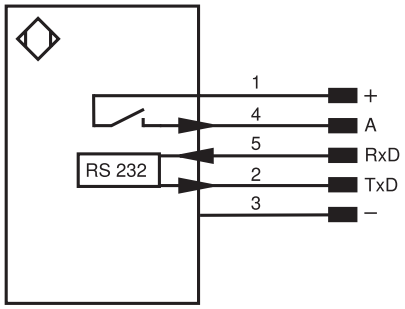

+	Power Supply +
–	Power Supply 0 V
A	Switching Output (NO)
RxD	RS-232 receive path
TxD	RS-232 send path

Specifications are subject to change without notice
Status: 11.03.2026
SAP: 50608
www.wenglor.com