

Distance Sensor

U30T001



- 2 switching outputs and switching status indicator
- IO-Link 1.1
- Rugged housing design
- Synchronous and multiplex mode

These ultrasonic sensors evaluate the sound reflected from the object. They are capable of detecting almost any object, regardless of material and condition. As such, they are especially well suited for monitoring fill levels of liquids and bulk goods and for detecting transparent objects. The measured value can be read out via IO-Link, and the sensor can be adapted as needed to the application. The sensor can be used in reflex mode operation and as an ultrasonic through-beam sensor.

Ultrasonic Data

Working range, reflex sensor	100...1900 mm
Working range, through-beam sensor	100...3800 mm
Setting Range	100...1900 mm
Reproducibility maximum	2 mm
Linearity Deviation	1 %
Resolution	1 mm
Ultrasonic Frequency	200 kHz
Opening Angle	< 13 °
Service Life (T = +25 °C)	100000 h
Switching Hysteresis	2 % *

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 40 mA
Switching frequency, reflex sensor	6,5 Hz
Switching frequency, through-beam sensor	6,5 Hz
Response time, reflex sensor	77 ms
Response time, through-beam sensor	77 ms
Temperature Range	-30...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Synchronous Mode	Up to 32 sensors
Multiplex Mode	up to 16 sensors
Short Circuit Protection	yes
Reverse Polarity and Overload Protection	yes
Interface	IO-Link V1.1 Smart Sensor Profile
Data Storage	yes
Protection Class	III

Mechanical Data

Setting Method	IO-Link
Setting Method	Teach input (for switching output)
Housing Material	Brass, nickel-plated
Housing Material	Plastic, PA
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin

Safety-relevant Data

MTTFd (EN ISO 13849-1)	1317,9 a
------------------------	----------



PNP NO	●
IO-Link	●

Connection Diagram No.	368
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	130

* Referring to the switching distance, at least 2 mm.


Complementary Products

IO-Link Master

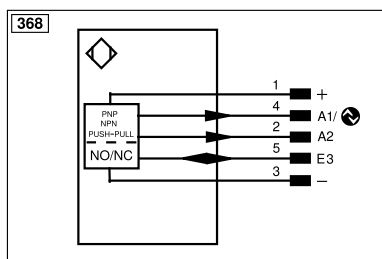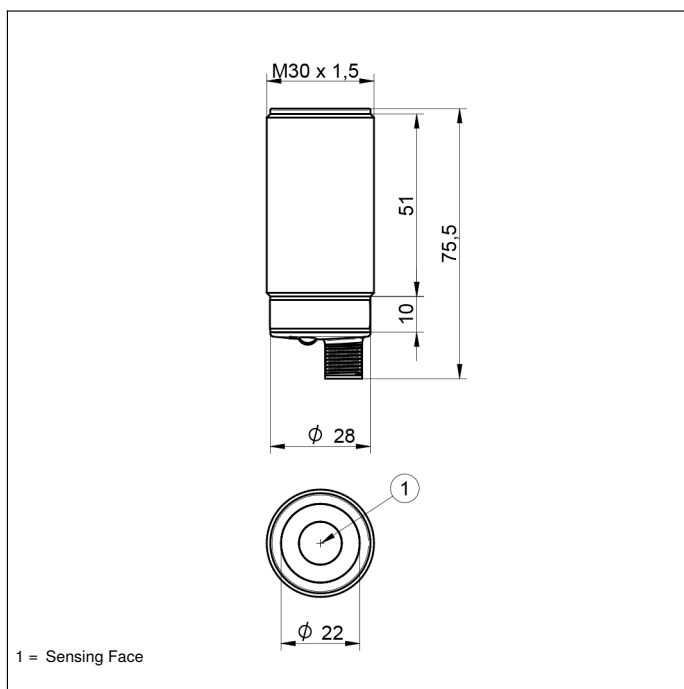

Characteristic response curve

Characteristic curves show the position of the center or the front edge of the measured object (100 × 100 mm plate) at the time of switching.
U30T001

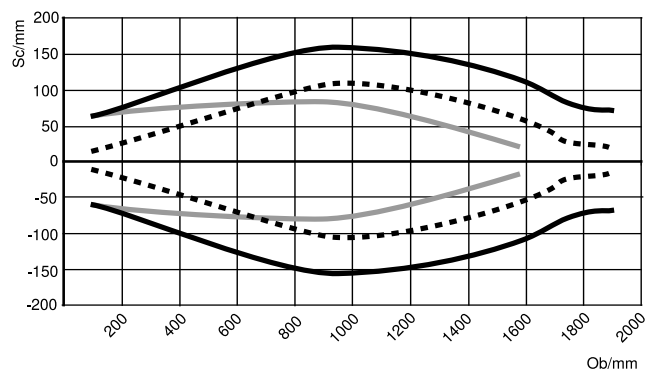

Ob = Object

Sc = Sonic cone width

- Standard sonic cone (center of the measured object)
- Extra-narrow sonic cone (center of the measured object)
- - - Standard sonic cone (front edge of the measured object)

