wenglor
the innovative family


Technical Data

P1PH901

Reflex Sensor

with background suppression electronic



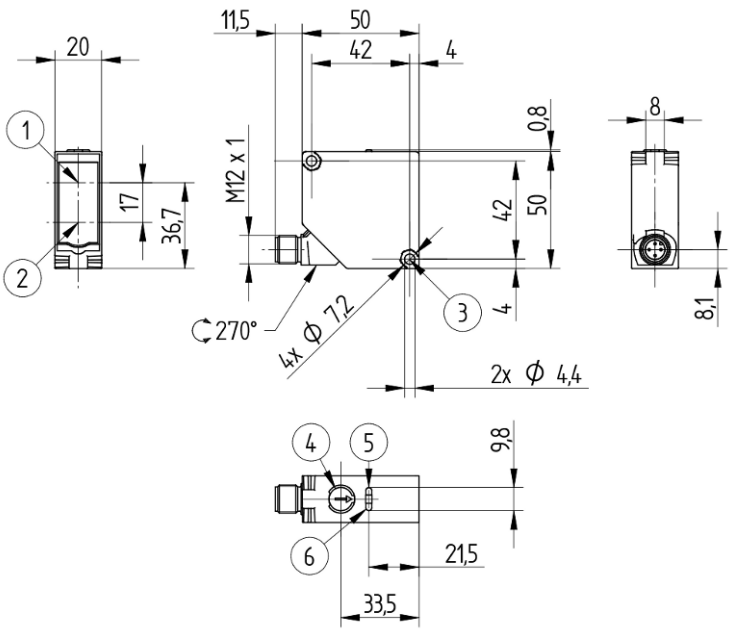

Symbol	Key
1	Emitter diode
2	Receiver diode
3	Wrench width 7
4	Switching distance adjuster
5	Power LED
6	Switching status indicator O1

EN

Dimensions in mm
Subject to change without notice
Version 1
www.wenglor.com

Technical data

Optical Data	
Range	2500 mm
Setting Range	200...2500 mm
Switching Hysteresis	< 5 %
Light Source	LED, red
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	40000 Lux
Light Spot Diameter	see table
Optical axis	Aligned
Switching point	Calibrated
Principle	Time-of-Flight

Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (Ub = 24 V)	< 25 mA
Switching Frequency	200 Hz
Switching Frequency (interference-free mode)	40 Hz
Response time (interference-free mode)	13 ms
Response Time	2.5 ms
Temperature Drift	< 10 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III

Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic, ABS/PC
Degree of Protection	IP67 IP68
Connection Type	Plug variant
Connection	M12 × 1; 4-pin
Optic Cover	Plastic, PMMA

Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1079.75 a


General Data	
Scope of delivery	1 × Z1PE002 mounting set 1 × initial start-up instructions 1 × sensor

Adjustable parameters	
Output	PNP
Circuit	NC NO inactive Error output NC+NO
Other parameters	Off-delay On-delay Mode of operation Hysteresis Switching point Emitted light

All other parameters can be found in the product documentation.

BMECat data	
eCl@ss 5.1.4	27-27-09-04 Light scanner w. background masking
eCl@ss 6.x	27-27-09-04 Light scanner w. background masking
eCl@ss 7.0	27-27-09-04 Light scanner w. background masking
eCl@ss 7.1	27-27-09-04 Light scanner w. background masking
eCl@ss 8.x	27-27-09-04 Light scanner w. background masking
eCl@ss 10.0.1	27-27-09-04 Light scanner w. background masking

Technical illustrations

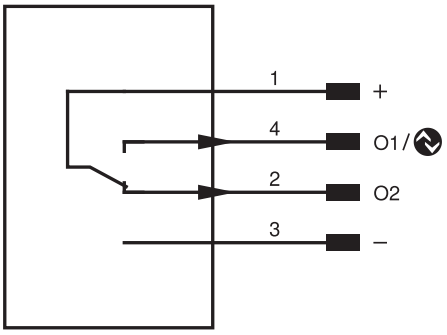

Pin	Pin function	Polarity	Circuit
1	Supply Voltage +		
2	Switching Output 2	PNP	Antivalent
3	Supply voltage 0 V		
4	Switching Output 1 IO-Link	PNP	NO

Table 1			
Detection Range	250 mm	1200 mm	2500 mm
Light Spot Diameter	20 mm	35 mm	70 mm

Reflector data	
white (90 %)	2.5 m
grey (18 %)	2 m
black (6 %)	1.2 m

Related to remission value. Typical maximum switching distance deviation dSr = ± 0.06 m