

Laser Distance Sensor

Time of Flight


P1KY101S01

Part Number



- 2 mutually independent switching outputs
- IO-Link interface
- Large working range
- Miniature design
- Switching distance preset

The high-performance distance sensor with compact format accurately determines distance between the sensor and the object on the basis of transit time measurement. Two mutually independent switching outputs and the intelligent IO-Link interface permit multifunctional use for precisely ascertaining distance to an object, or for detecting the object at any two switching points. A large working range of 0 to 1,500 mm ensures top performance with a miniature format and flexibility where range is concerned. Thanks to laser class 1, the sensor's laser beam is harmless for the human eye.

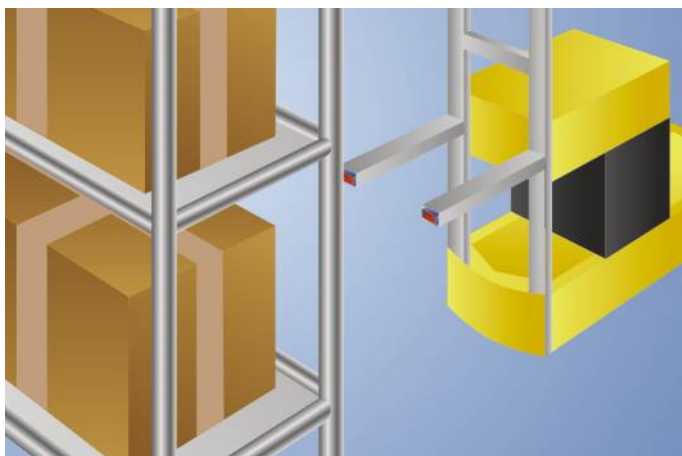

Technical Data

Optical Data	
Working Range	0...1500 mm
Setting Range	50...1500 mm
Switching Hysteresis	< 30 mm
Light Source	Laser (infrared)
Wavelength	940 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Reflector required	no

Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	10 Hz
Response Time	< 36 ms
Temperature Drift	< 2,5 %
Temperature Range	-30...50 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 μA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Protection Class	III
FDA Accession Number	1720547-001


Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic, ABS/PC
Housing Material	Plastic, PC
Optic Cover	Plastic, PMMA
Degree of Protection	IP67
Degree of Protection	IP68
Connection	M8 × 1; 4-pin

Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2266,52 a

PNP NO	●
IO-Link	●
Connection Diagram No.	223
Control Panel No.	A23
Suitable Connection Equipment No.	7
Suitable Mounting Technology No.	400


Complementary Products

IO-Link Master Software	
-------------------------	--

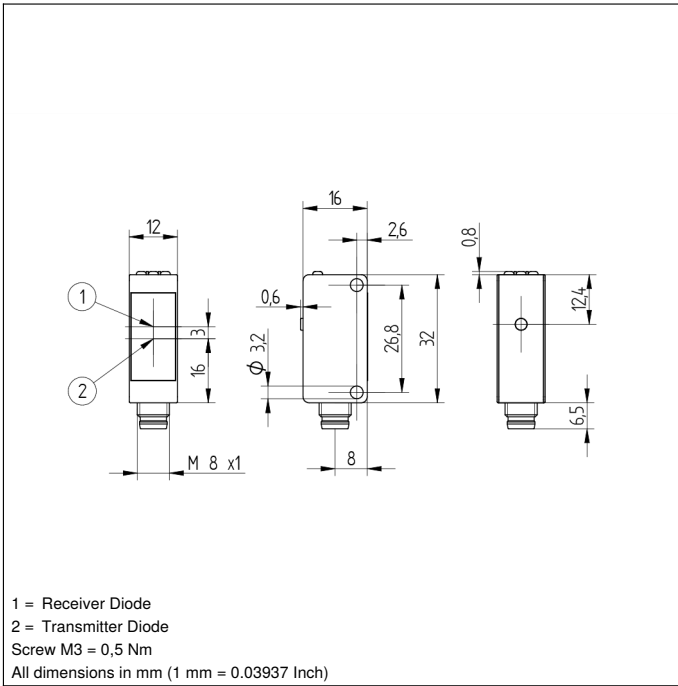


Ctrl. Panel

A 23



- 06 = Teach Button
- 5a = Switching Status Indicator, A1
- 68 = Power LED
- 6a = Switching Status Indicator, A2

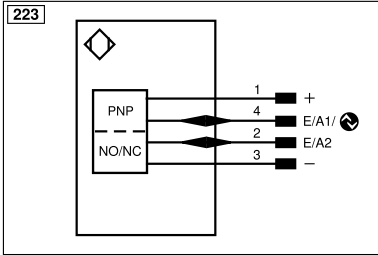

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
⚡	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
PT	Platinum measuring resistor	ENAR5422	Encoder A/Ā (TTL)
			Wire Colors according to DIN IEC 60757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow


Table 1

Working Distance	350 mm	700 mm	1500 mm
Light Spot Diameter	14 mm	25 mm	42 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

P1KY1

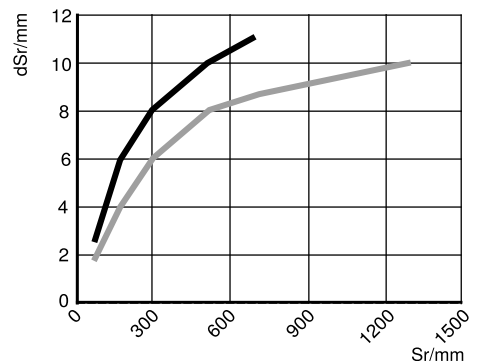

Sr = Switching Distance

dSr = Switching Distance Change

black 6 % remission

grey 18 % remission

