

Laser Distance Sensor

Triangulation


P1PC312

Part Number



- Analog output 0...10 V
- Integrated jump detection
- Intuitive operating concept
- Switching point independent of material, color and brightness
- Wireless settings via NFC

These laser distance sensors work with a fine red light beam and a high-resolution CMOS line. They determine the distance between the sensor and the object by means of the triangulation principle. They are designed to fulfill applications in a wide range of industries intuitively, reliably and economically. Innovative functions simplify initial start-up and make the sensors versatile all-rounders. Extensive condition monitoring functions also enable predictive maintenance and trouble-free operation. The display shows the current measured values, which allows the sensor to be set up quickly and intuitively. Settings are entered via IO-Link or conveniently using the weCon app via NFC.

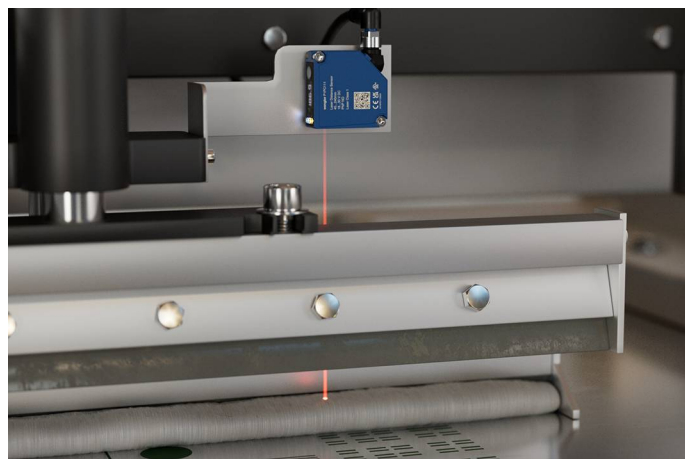

Technical Data

Optical Data

Working Range	60...660 mm
Measuring Range	60...660 mm
Reproducibility maximum	1000 µm
Reproducibility: 1 Sigma	100 µm
Linearity Deviation	2400 µm
Switching Hysteresis	< 1 %
Light Source	Laser (red)
Wavelength	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 35 mA
Switching Frequency	650 Hz
Measuring Rate	2500 /s
Response Time	< 0,77 ms
Temperature Drift	< 150 µm/K
Temperature Range	-25...50 °C
Number of Switching Outputs	1
Switching Output Voltage Drop	< 1,5 V
Switching Output/Switching Current	100 mA
Analog Output	0...10 V
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
IO-Link Version	1.1.4
IO-Link transmission speed	COM3
Protection Class	III
FDA Accession Number	2512215-000

Mechanical Data

Setting Method	NFC
Setting Method	Teach-In
Housing Material	Plastic, ABS
Degree of Protection	IP67
Degree of Protection	IP68
Connection	M12 × 1; 5-pin
Optic Cover	Plastic, PMMA

Safety-relevant Data


MTTFd (EN ISO 13849-1)	566,57 a
Scope of delivery	1 × initial start-up instructions 1 × sensor 1 × Z1PE002 mounting set

PNP NO	●
Analog Output	●
IO-Link	●
NFC interface	●

Connection Diagram No.	241
Control Panel No.	X12
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	380


Complementary Products

Dust extraction tube	
IO-Link Master	
Protective housing	
Protective Screen	
Software	

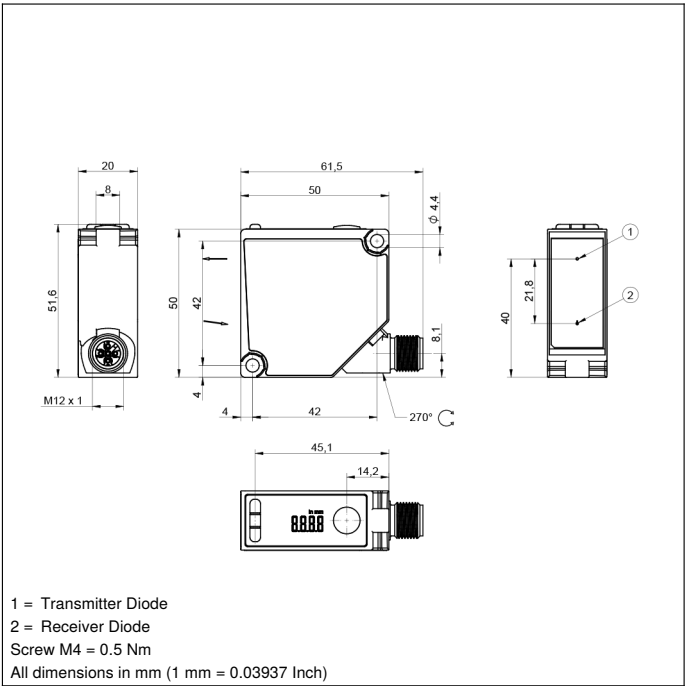


Ctrl. Panel

X12



06 = Teach Button
5a = Switching Status Indicator, O1
60 = display
68 = Power LED
7c = Analog Output Indicator, AO

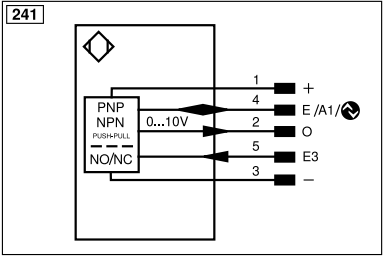

Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	Not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ū	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Ū	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
R	Reset input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	≡	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
		ENARs422	Encoder A/Ā (TTL)
		ENBRs422	Encoder B/B̄ (TTL)
		ENa	Encoder A
		ENb	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLt	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Table 1

Working Distance	60 mm	360 mm	660 mm
Spot Size	1,5 × 3,5 mm	1,3 × 5 mm	1,1 × 6,7 mm

