


# Plastic Fiber-Optic Cable

## Through-Beam Mode


# FTS03-2M-10HF

Part Number

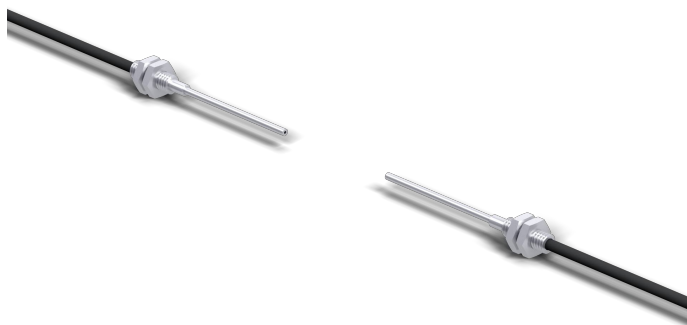

- Especially suitable in applications where only minimal space is available
- Fiber-optic cable can be cut to length by the cutting tool

Plastic fiber-optic cables are very flexible and suitable for use in confined spaces. The fiber optics are supplied in 2 m lengths. Special lengths of up to 50 m are possible. Users can shorten the fiber optics using the Z0015 cutting tool.

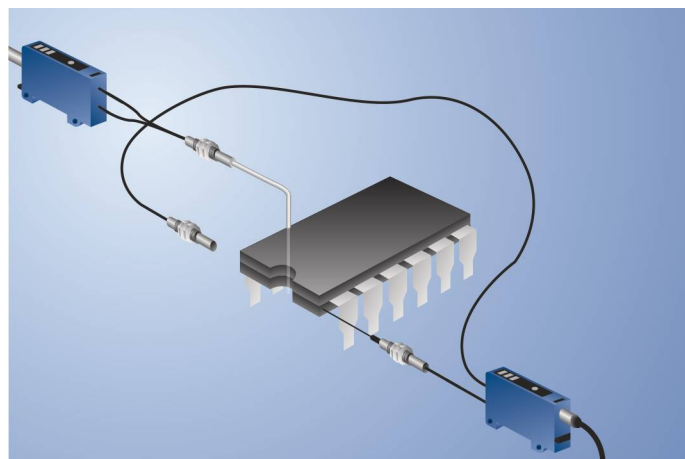

## Technical Data

### Optical Data


Fiber Core Diameter	1 mm
Fiber	Step Index
Fiber Distribution	parallel arrangement
Range with P1XD0xx	370 mm
Range P1XD10x/11x	500 mm
Range P1XD12x/13x	420 mm
Range P1XD2xx red light	430 mm
Range P1XD2xx blue light	560 mm
Range P1XD2xx pink light	600 mm
Opening Angle	55 °

### Mechanical Data

Cable type	High-flex
Temperature Range	-40...60 °C
Bending Radius	2 mm
Fiber-Optic Length L	2 m
Jacket Material	Plastic, PE
Fiber Optic Material	Plastic, PMMA
Material End Sleeve	Stainless steel, V2A (1.4305/303)
End sleeve shape	Standard
Flexible End Sleeve	yes
Bending Radius End Sleeve	60 mm
Jacket Diameter	2,2 mm
Light Emission	straight
End Sleeve No.	FTS03

Packaging unit	2 Pieces
Scope of delivery	1 × Z0015 cutting tool 2 × fiber-optic cables 4 × M4 hex nuts

**FTS03-2M-10HF**

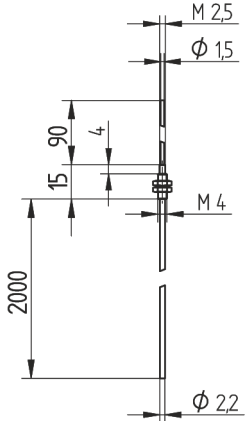

All dimensions in mm (1 mm = 0.03937 Inch)

