Reflex Sensor
Energetic

TF05PBS804-P24

Part Number




Technical Data

Optical Data	
Range	50 mm
Electrical Data	
Supply Voltage	10...30 V DC
Scope of delivery	1 × initial start-up instructions 1 × MUTTER-M30-E002 hex nut 1 × sensor

- **Adjustable detection range**
- **Fine focused optics**

The transmitter and receiver in these sensors are located in a single housing. The sensor evaluates transmitted light reflected back from the object. The output is switched as soon as an object passes the selected range. Bright objects reflect more light than dark objects, and can thus be recognized from greater distances.

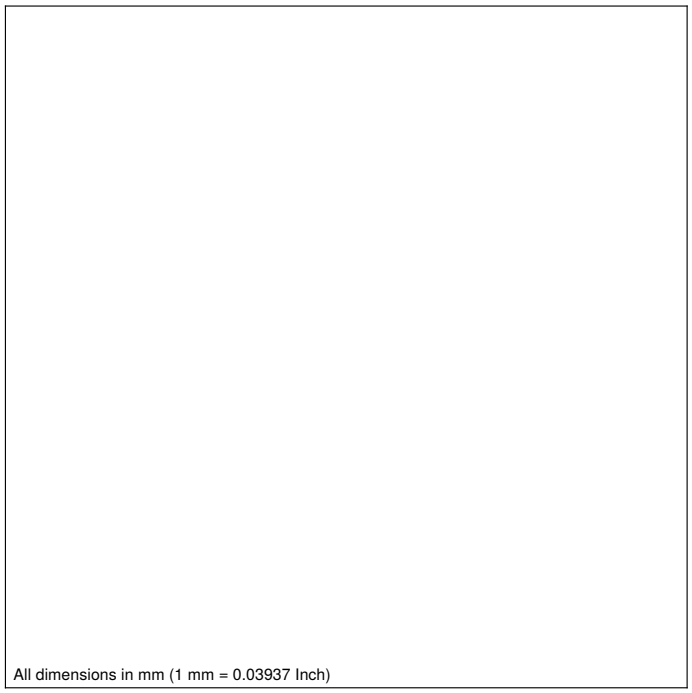

All dimensions in mm (1 mm = 0.03937 Inch)

Specifications are subject to change without notice V0-02.09.2026