

Karşılıklı Sensör

OSDK803Z0091

Sipariş numarası



- Akıllı sabitleme tekniği dahildir
- Geniş algılama mesafesi
- Kolay montaj
- Küçük montaj alanı
- Test girişi

Teknik Veriler

Optik veriler

Algılama mesafesi	8000 mm
Işık türü	Kırmızı ışık
Kullanım ömrü (Tu = +25 °C)	100000 h
Açılma açısı	5 °

Elektriksel veriler

Sensör tipi	Verici
Besleme gerilimi	10...30 V DC
Güç tüketimi (Ub = 24 V)	< 15 mA
Sıcaklık kayması	< 10 %
Sıcaklık aralığı	-25...60 °C
Ters kutup korumalı	Evet
Test girişi	Evet
Koruma sınıfı	III

Mekanik veriler


Gövde malzemesi	Plastik
Koruma sınıfı	IP67
Bağlantı türü	Kablo, 3 damarlı, 2 m
Teslimat kapsamı	Montaj Desteği

Bağlantı şeması no.	803
Kumanda panosu no.	DK2
Uygun sabitleme tekniği no.	150

Uygun alıcılar


OEDK803A0091

Karşılıklı ışık bariyerleri, endüstriyel ortamlarda kullanım için çok uygundur: Geniş algılama mesafeleri sayesinde çok kirli ortamlarda da yüksek fonksiyon güvenliği ile çalışırlar. Test girişi üzerinden bir fonksiyon testi uygulanabilir.

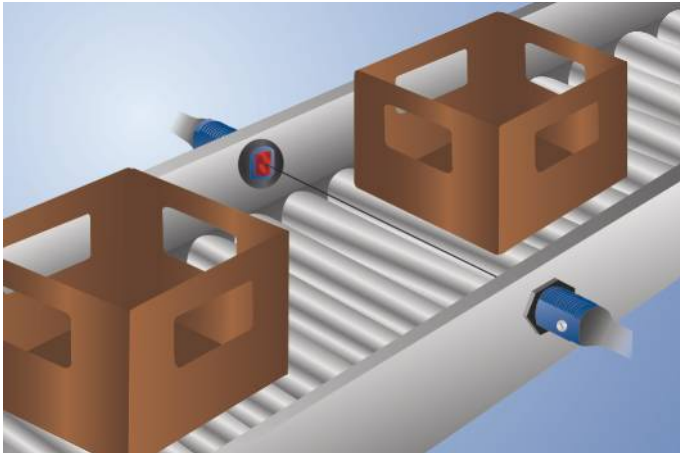


Tamamlayıcı ürünler

Toz engelleme aparatı STAUBTUBUS-01

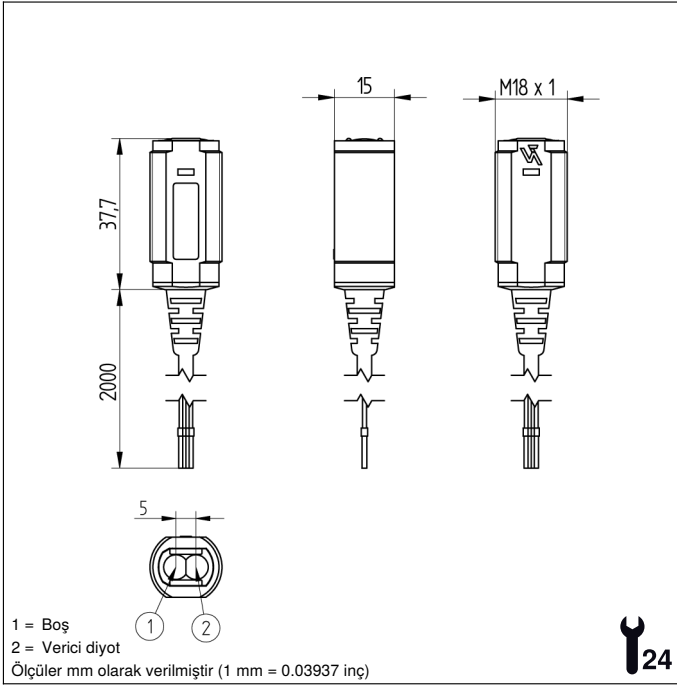


Kumanda panosu

DK2



04 = Fonksiyon göstergesi
68 = Besleme gerilimi göstergesi

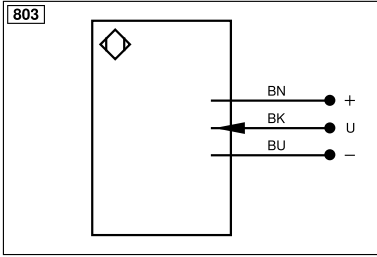

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ä	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link		Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARIS422	Encoder A/Ä (TTL)
		ENBRIS422	Encoder B/ß (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		ACK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

