

# Enabling Switch

## S2DF002

Part Number



- Feedback (vibration signal and LED) upon approval
- One-hand operation thanks to ergonomic design
- Rubberized enabling switch

The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

### Technical Data

#### Electrical Data

Temperature Range -5...60 °C

#### Mechanical Data

Housing Material Plastic

Service Life (Switching Cycles) 1000000

Degree of Protection IP54

Connection Cable, 10-wire, 5 m

#### Safety-relevant Data

B10d Switching Cycles 100 000

Number of NO 2

#### Function

3-stage yes

Additional keys + / - key

Vibration signal yes

Switching Status Indicator yes

Connection Diagram No. 862


Control Panel No. FP1

Suitable Mounting Technology No. 840

### Complementary Products


Safety Relay SR4B3B01S, SR4D3B01S

Software

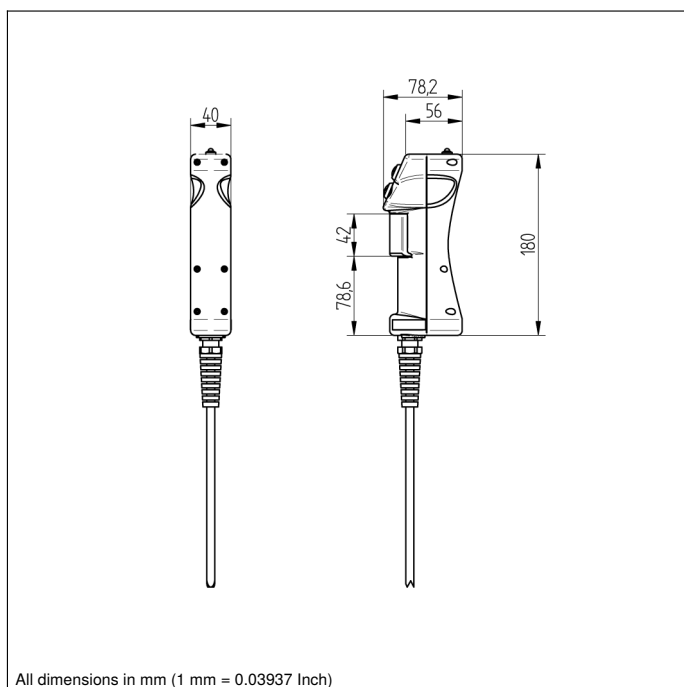

## Ctrl. Panel

### FP1



- 01 = Switching Status Indicator
- 24 = Plus Button
- 25 = Minus Button
- 93 = Confirmation key