

Reflex Sensor with Background Suppression

YD24PA3 LASER

Part Number




- Spot diameter: 0,5 mm
- Stainless steel housing
- Switching frequency: 1,3 kHz

Technical Data

Optical Data	
Range	150 mm
Setting Range	35...150 mm
Switching Hysteresis	< 5 %
Light Source	Laser (red)
Wavelength	655 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	2
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 25 mA
Switching Frequency	1300 Hz
Response Time	385 µs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	0820356-001
Mechanical Data	
Setting Method	Potentiometer
Housing Material	Stainless Steel
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
PNP NC, PNP NO	●
Connection Diagram No.	101
Control Panel No.	D18
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	150

* Valid for all sensors from revision F. The revision can be found in the production order number "xxxxx/F/xxxxxxx," which is indicated on the product label.

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

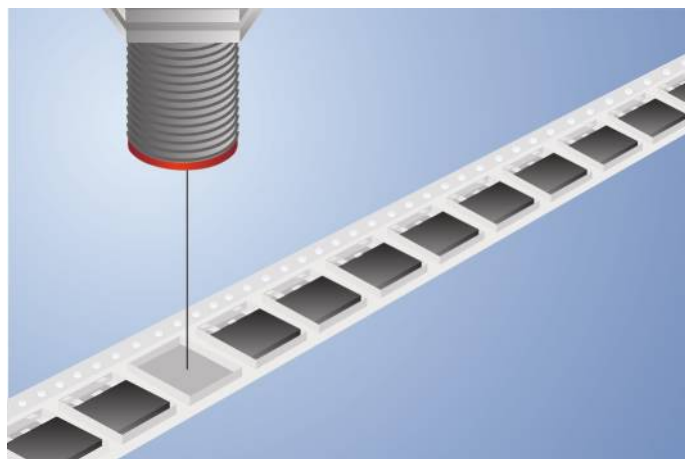


Complementary Products


Dust Extraction Tube STAUBTUBUS-01
PNP-NPN Converter BG2V1P-N-2M

Ctrl. Panel

D18



05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning
68 = supply voltage indicator

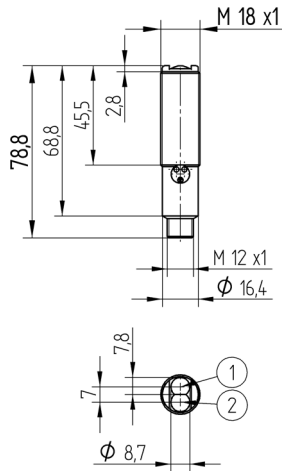


1 = Transmitter Diode
2 = Receiver Diode

All dimensions in mm (1 mm = 0.03937 Inch)



101



Legend

+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENB	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/Ä (TTL)		


Table 1

Detection Range	50 mm	100 mm	150 mm
Light Spot Diameter	1,2 mm	< 0,5 mm	1,5 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

YD24/YW24

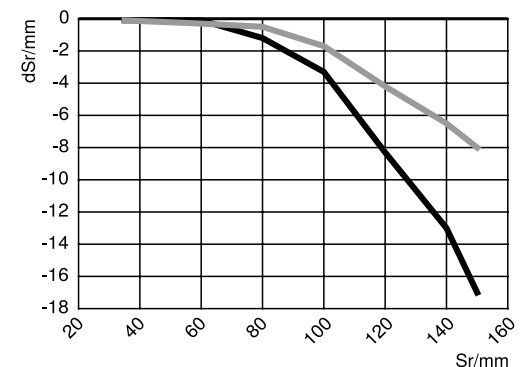

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

— grey 18 % remission

