

Connection Cable

M12 × 1; 12-pin

ZDCV001

Part Number



Technical Data

Electrical Data

Supply Voltage ≤ 30 V DC

Mechanical Data

Connection 1 Socket, straight

Connection mode 1 M12 × 1, 12-pin

Connection 2 Plug, straight

Connection mode 2 M12 × 1, 12-pin

Torque M12: 0,6 Nm

Cable Length 2 m

Outer diameter (d) 6,5 mm

Wire cross-section 0,14 mm²

Degree of Protection IP67

Temperature range (fixed installation) -40...85 °C

Temperature range (moving application) -25...85 °C

Cable Jacket Material PUR

Material Wire Insulation TPE

Material Sleeve Nut CuZn, nickel-plated

Screened yes

Halogen-free yes

Drag Chain Suitable yes

Bending radius (fixed installation) 5 × d

Bending radius (used in motion) 10 × d

Travel speed (with 5 m horizontal travel distance) $\leq 3,3$ m/s

Acceleration ≤ 5 m/s²

Bending cycles ≤ 5000000

Number of torsion cycles ≤ 2000000

Torsional stress $\pm 30^\circ/\text{m}$

Torsional speed (cycles/min) 35

Packaging unit 1 Piece



Connection Diagram No.

S90

Connection Equipment No.

87

- Drag chain suitable
- PUR, straight
- Screened
- Suitable for robots

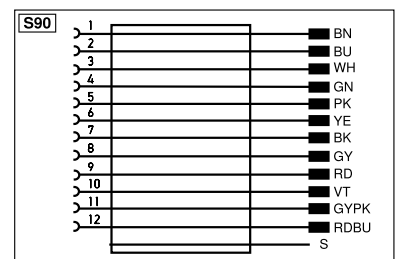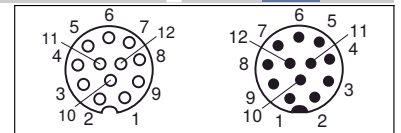

All dimensions in mm (1 mm = 0.03937 Inch)

* Per terminal

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	QLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/A (TTL)		