

# Reflex Sensor with Background Suppression

## HD11PA3S554

Part Number




- Electronic background suppression
- Red light
- Stainless steel housing

### Technical Data


| Optical Data                                |                 |
|---------------------------------------------|-----------------|
| Range                                       | 100 mm          |
| Switching Hysteresis                        | < 5 %           |
| Light Source                                | Red Light       |
| Service Life (T = +25 °C)                   | 100000 h        |
| Max. Ambient Light                          | 10000 Lux       |
| Spot Diameter                               | see Table 1     |
| Electrical Data                             |                 |
| Supply Voltage                              | 10...30 V DC    |
| Current Consumption (U <sub>b</sub> = 24 V) | < 40 mA         |
| Switching Frequency                         | 600 Hz          |
| Response Time                               | 833 µs          |
| Temperature Drift                           | < 5 %           |
| Temperature Range                           | -25...60 °C     |
| Switching Output Voltage Drop               | < 2,5 V         |
| PNP Switching Output/Switching Current      | 200 mA          |
| Short Circuit Protection                    | yes             |
| Reverse Polarity Protection                 | yes             |
| Overload Protection                         | yes             |
| Protection Class                            | III             |
| Mechanical Data                             |                 |
| Setting Method                              | Potentiometer   |
| Housing Material                            | Stainless Steel |
| Full Encapsulation                          | yes             |
| Degree of Protection                        | IP67            |
| Connection                                  | M12 × 1; 4-pin  |
| PNP NO/NC antivalent                        | ●               |
| Connection Diagram No.                      | 101             |
| Control Panel No.                           | D6              |
| Suitable Connection Technology No.          | 2               |
| Suitable Mounting Technology No.            | 150             |

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

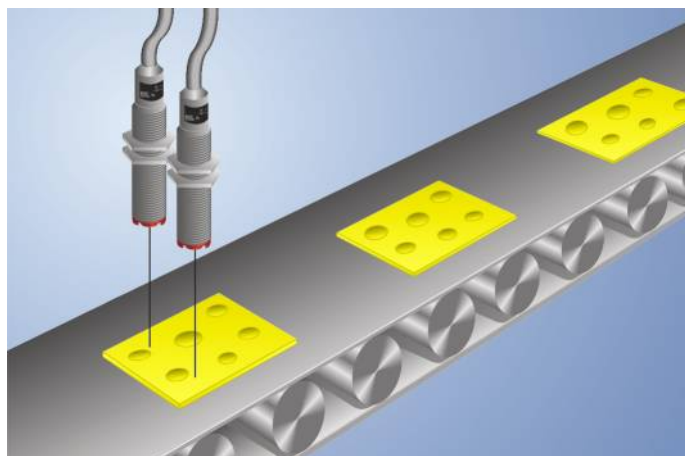

### Complementary Products

|                                    |
|------------------------------------|
| Dust extraction tube STAUBTUBUS-01 |
| PNP-NPN Converter BG2V1P-N-2M      |

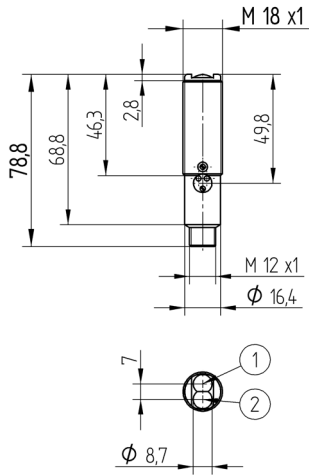


1 = Transmitter Diode  
2 = Receiver Diode

All dimensions in mm (1 mm = 0.03937 Inch)




### Ctrl. Panel



01 = Switching Status Indicator  
02 = Contamination Warning  
05 = Switching Distance Adjuster

101



### Legend

|          |                                            |
|----------|--------------------------------------------|
| +        | Supply Voltage +                           |
| -        | Supply Voltage 0 V                         |
| ~        | Supply Voltage (AC Voltage)                |
| A        | Switching Output (NO)                      |
| Ā        | Switching Output (NC)                      |
| V        | Contamination/Error Output (NO)            |
| Ṽ        | Contamination/Error Output (NC)            |
| E        | Input (analog or digital)                  |
| T        | Teach Input                                |
| Z        | Time Delay (activation)                    |
| S        | Shielding                                  |
| RxD      | Interface Receive Path                     |
| TxD      | Interface Send Path                        |
| RDY      | Ready                                      |
| GND      | Ground                                     |
| CL       | Clock                                      |
| E/A      | Output/Input programmable                  |
|          | IO-Link                                    |
| PoE      | Power over Ethernet                        |
| IN       | Safety Input                               |
| OSSD     | Safety Output                              |
| Signal   | Signal Output                              |
| BI-D+/-  | Ethernet Gigabit bidirect. data line (A-D) |
| EN0RS422 | Encoder 0-pulse 0-0 (TTL)                  |

|          |                              |
|----------|------------------------------|
| PT       | Platinum measuring resistor  |
| nc       | not connected                |
| U        | Test Input                   |
| Ū        | Test Input inverted          |
| W        | Trigger Input                |
| O        | Analog Output                |
| O-       | Ground for the Analog Output |
| BZ       | Block Discharge              |
| AWV      | Valve Output                 |
| a        | Valve Control Output +       |
| b        | Valve Control Output 0 V     |
| SY       | Synchronization              |
| E+       | Receiver-Line                |
| S+       | Emitter-Line                 |
| ±        | Grounding                    |
| SnR      | Switching Distance Reduction |
| Rx+/-    | Ethernet Receive Path        |
| Tx+/-    | Ethernet Send Path           |
| Bus      | Interfaces-Bus A(+)/B(-)     |
| La       | Emitted Light disengageable  |
| Mag      | Magnet activation            |
| RES      | Input confirmation           |
| EDM      | Contact Monitoring           |
| ENAR5422 | Encoder A/Ā (TTL)            |
| ENBR5422 | Encoder B/B̄ (TTL)           |

|        |                     |
|--------|---------------------|
| ENa    | Encoder A           |
| ENb    | Encoder B           |
| AMIN   | Digital output MIN  |
| AMAX   | Digital output MAX  |
| AOK    | Digital output OK   |
| SY In  | Synchronization In  |
| SY OUT | Synchronization OUT |
| LI     | Brightness output   |
| M      | Maintenance         |

### Wire Colors according to DIN IEC 757

|      |              |
|------|--------------|
| BK   | Black        |
| BN   | Brown        |
| RD   | Red          |
| OG   | Orange       |
| YE   | Yellow       |
| GN   | Green        |
| BU   | Blue         |
| VT   | Violet       |
| GY   | Grey         |
| WH   | White        |
| PK   | Pink         |
| GNYE | Green/Yellow |

Table 1

| Detection Range | 60 mm  | 120 mm |
|-----------------|--------|--------|
| Spot Diameter   | 2,5 mm | 5 mm   |

