

# Through-Beam Sensor

## EO95VBN-P24

Part Number

Product picture  
currently  
not available



- Adjustable range
- Red light

### Technical Data

#### Optical Data

|                           |           |
|---------------------------|-----------|
| Range                     | 5000 mm   |
| Switching Hysteresis      | < 15 %    |
| Light Source              | Red Light |
| Service Life (T = +25 °C) | 100000 h  |
| Max. Ambient Light        | 10000 Lux |
| Opening Angle             | 8 °       |

#### Electrical Data

|                                             |              |
|---------------------------------------------|--------------|
| Sensor Type                                 | Receiver     |
| Supply Voltage                              | 10...30 V DC |
| Current Consumption (U <sub>b</sub> = 24 V) | < 40 mA      |
| Switching Frequency                         | 500 Hz       |
| Response Time                               | 1 ms         |
| Temperature Drift                           | < 10 %       |
| Temperature Range                           | -10...60 °C  |
| Switching Output Voltage Drop               | < 2,5 V      |
| Switching Output/Switching Current          | 200 mA       |
| Residual Current Switching Output           | < 50 µA      |
| Short Circuit and Overload Protection       | yes          |
| Reverse Polarity Protection                 | yes          |
| Protection Class                            | III          |

#### Mechanical Data

|                      |                     |
|----------------------|---------------------|
| Setting Method       | Potentiometer       |
| Housing Material     | CuZn, nickel-plated |
| Full Encapsulation   | yes                 |
| Degree of Protection | IP67                |
| Connection           | Cable, 3-wire, 6 m  |

#### Safety-relevant Data

|                        |           |
|------------------------|-----------|
| MTTFd (EN ISO 13849-1) | 4313,92 a |
|------------------------|-----------|

PNP NO

Connection Diagram No.

202

Control Panel No.

01


Suitable Connection Equipment No.

2

Suitable Mounting Technology No.

170

These through-beam sensors are best suited for use in industrial environments. Thanks to their large working range, the devices demonstrate excellent functional reliability in highly contaminated environments. The sensors can be checked for correct functioning via the test input.

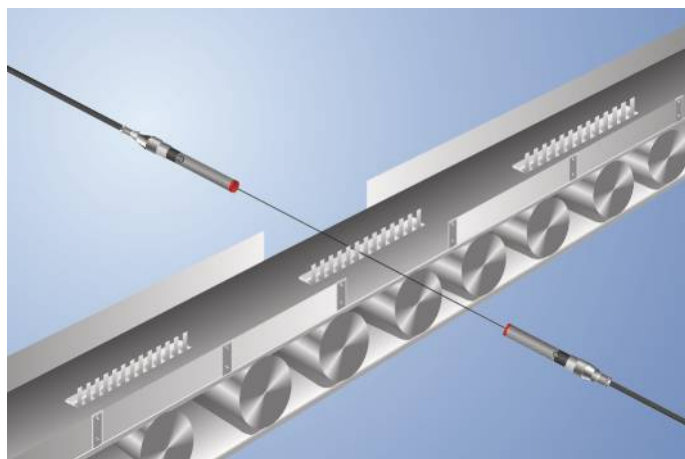

### Complementary Products

Path-Folding Mirror LA9

Ctrl. Panel

01




01 = Switching Status Indicator  
05 = Switching Distance Adjuster

All dimensions in mm (1 mm = 0.03937 Inch)



202



| Legend    |                                            |          |                                |                                        |                     |
|-----------|--------------------------------------------|----------|--------------------------------|----------------------------------------|---------------------|
| +         | Supply Voltage +                           | nc       | Not connected                  | ENBRS422                               | Encoder B/B (TTL)   |
| -         | Supply Voltage 0 V                         | U        | Test Input                     | ENA                                    | Encoder A           |
| ~         | Supply Voltage (AC Voltage)                | Ů        | Test Input inverted            | ENB                                    | Encoder B           |
| A         | Switching Output (NO)                      | W        | Trigger Input                  | AMIN                                   | Digital output MIN  |
| Ā         | Switching Output (NC)                      | W-       | Ground for the Trigger Input   | AMAX                                   | Digital output MAX  |
| V         | Contamination/Error Output (NO)            | O        | Analog Output                  | AOK                                    | Digital output OK   |
| Ȳ         | Contamination/Error Output (NC)            | O-       | Ground for the Analog Output   | SY In                                  | Synchronization In  |
| E         | Input (analog or digital)                  | BZ       | Block Discharge                | SY OUT                                 | Synchronization OUT |
| T         | Teach Input                                | Amv      | Valve Output                   | OLT                                    | Brightness output   |
| Z         | Time Delay (activation)                    | a        | Valve Control Output +         | M                                      | Maintenance         |
| S         | Shielding                                  | b        | Valve Control Output 0 V       | rsv                                    | Reserved            |
| RxD       | Interface Receive Path                     | SY       | Synchronization                | Wire Colors according to DIN IEC 60757 |                     |
| TxD       | Interface Send Path                        | SY-      | Ground for the Synchronization | BK                                     | Black               |
| RDY       | Ready                                      | E+       | Receiver-Line                  | BN                                     | Brown               |
| GND       | Ground                                     | S+       | Emitter-Line                   | RD                                     | Red                 |
| CL        | Clock                                      | ±        | Grounding                      | OG                                     | Orange              |
| E/A       | Output/Input programmable                  | SnR      | Switching Distance Reduction   | YE                                     | Yellow              |
| IO-Link   | IO-Link                                    | Rx+/-    | Ethernet Receive Path          | GN                                     | Green               |
| PoE       | Power over Ethernet                        | Tx+/-    | Ethernet Send Path             | BU                                     | Blue                |
| IN        | Safety Input                               | Bus      | Interfaces-Bus A(+)/B(-)       | VT                                     | Violet              |
| OSSD      | Safety Output                              | La       | Emitted Light disengageable    | GY                                     | Grey                |
| Signal    | Signal Output                              | Mag      | Magnet activation              | WH                                     | White               |
| BL_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES      | Input confirmation             | PK                                     | Pink                |
| ENo RS422 | Encoder 0-pulse 0/0 (TTL)                  | EDM      | Contact Monitoring             | GNYE                                   | Green/Yellow        |
| PT        | Platinum measuring resistor                | ENARS422 | Encoder A/A (TTL)              |                                        |                     |