

Light Curtain

Pick-to-Light

OLEBS923

Part Number



- 360° visible, two-color job display
- Error prevention during partial picking processes in shelves and storage locations
- Low mounting thanks to integrated reflector
- Rugged aluminium housing

Pick to light light curtains use the single-lens reflex principle. The necessary reflector is pre-installed on the rear of the housing and serves as a reflective surface for the neighboring light curtain, making installation easier. The integrated two-color light from the job display is visible from 360° and shows both correct and incorrect picks.




Technical Data


Optical Data	
Range	2000 mm
Min. Distance to Reflector	100 mm
Measurement Field Height (MFH)	120 mm
Beam Distance	30 mm
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	2,5 °
Two-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 50 mA
Switching Frequency	120 Hz
Response Time	4 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Teach-In
Housing Material	Aluminum
Degree of Protection	IP65
Connection	M12 × 1; 4-pin
Cable Length	250 mm
Housing Length (L)	246 mm
Reflector Length (RL)	162 mm
Connection Diagram No.	190
Control Panel No.	EB1
Suitable Connection Equipment No.	2

Complementary Products


Reflector Foil ZRDF10K01
Reflector ZRDE12B01



EB1



01 = Switching Status Indicator
06 = Teach Button
68 = supply voltage indicator

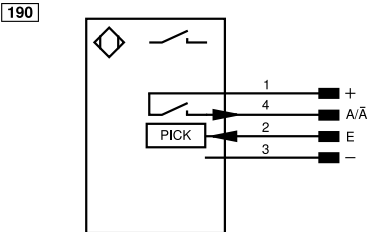

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	$\bar{U}$	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
$\bar{A}$	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
$\bar{V}$	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	$\pm$	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
EN0 RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/A (TTL)
		ENBrs422	Encoder B/B (TTL)
		ENa	Encoder A
		ENb	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLr	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

