




Ultra-Small. Ultra-Smart. Ultrasonic.
Ultrasonic Sensors



Product Highlights of Ultrasonic Sensors

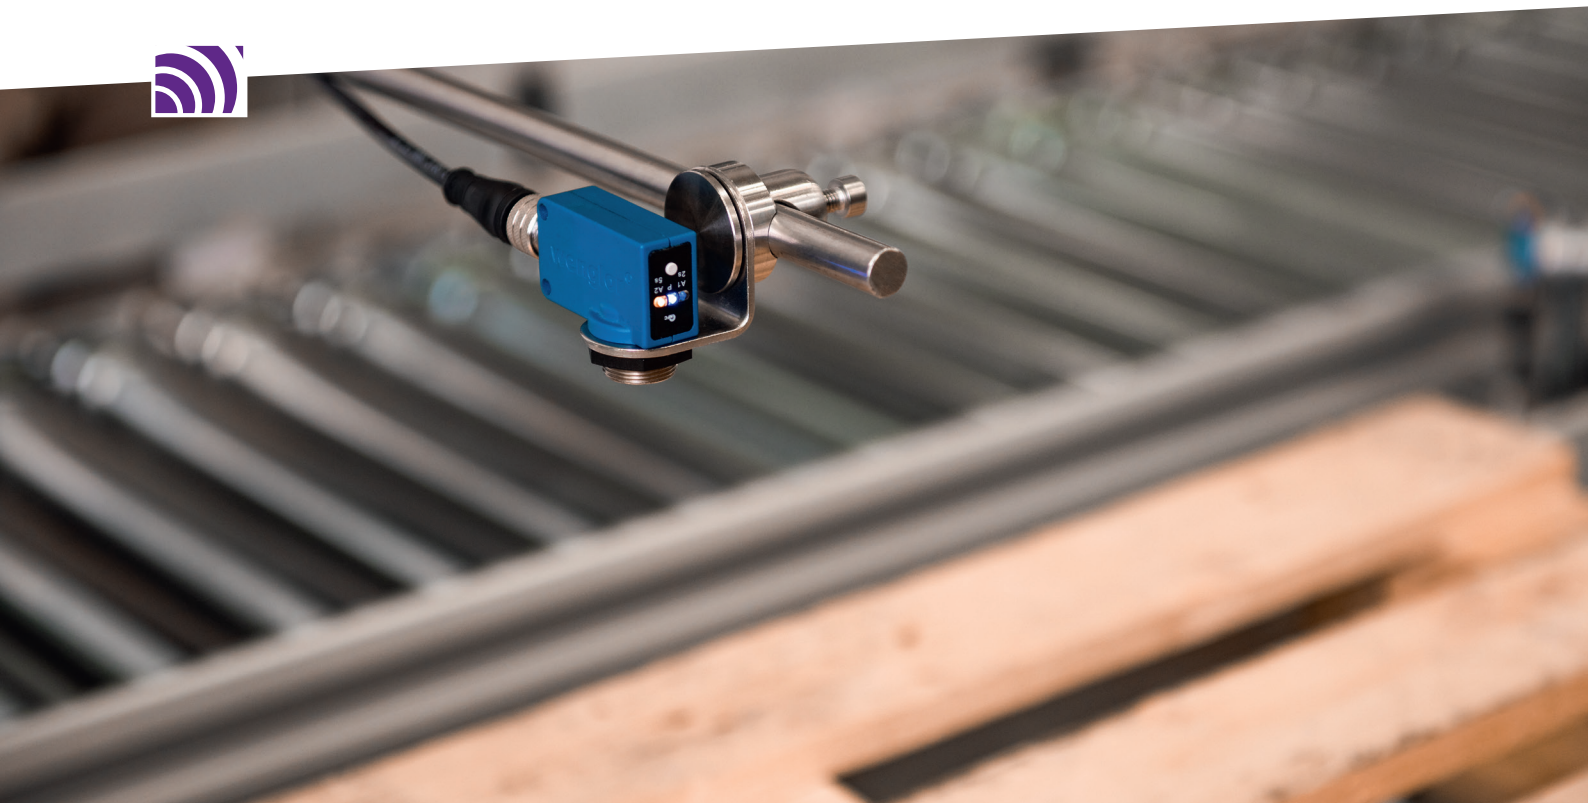

High Degree of Protection

- Models with sturdy plastic housings
- Robust models with stainless steel 316L and IP69K degree of protection for use in washdown and hygienic environments



High Flexibility and Functionality

- Reflex, barrier, multiplex and synchronous operation possible depending on the sensor variant
- Object detection regardless of material, color and physical state
- Metric and cubic designs available




Wide Temperature Range


- Reliable in cold temperatures (down to $-30\text{ }^{\circ}\text{C}$) and hot temperatures (up to $+60\text{ }^{\circ}\text{C}$)
- Suitable for use in the deep-freeze area



Strong Performance


- Constant measurement results thanks to integrated temperature compensation
- Insensitive to contamination, mist and dust

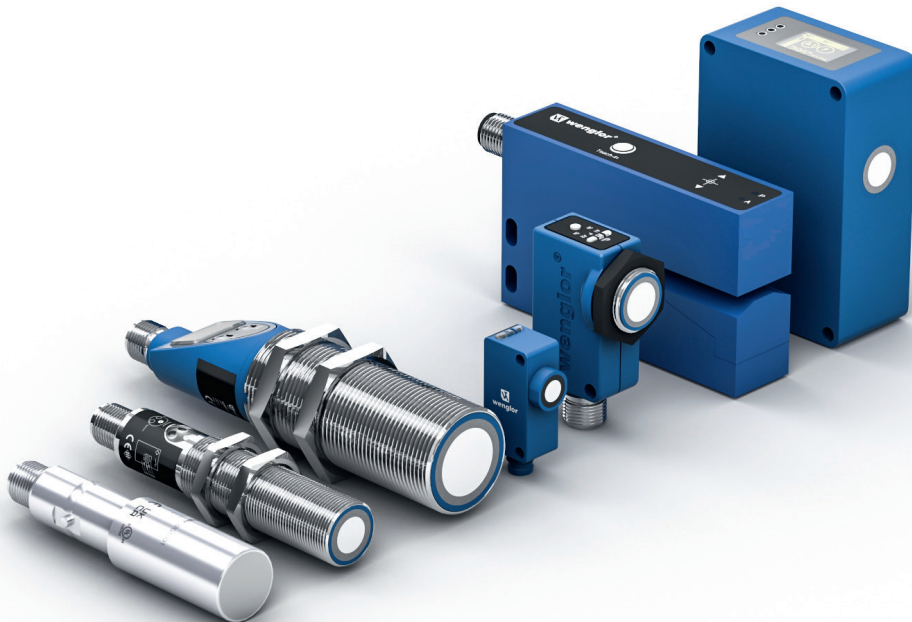

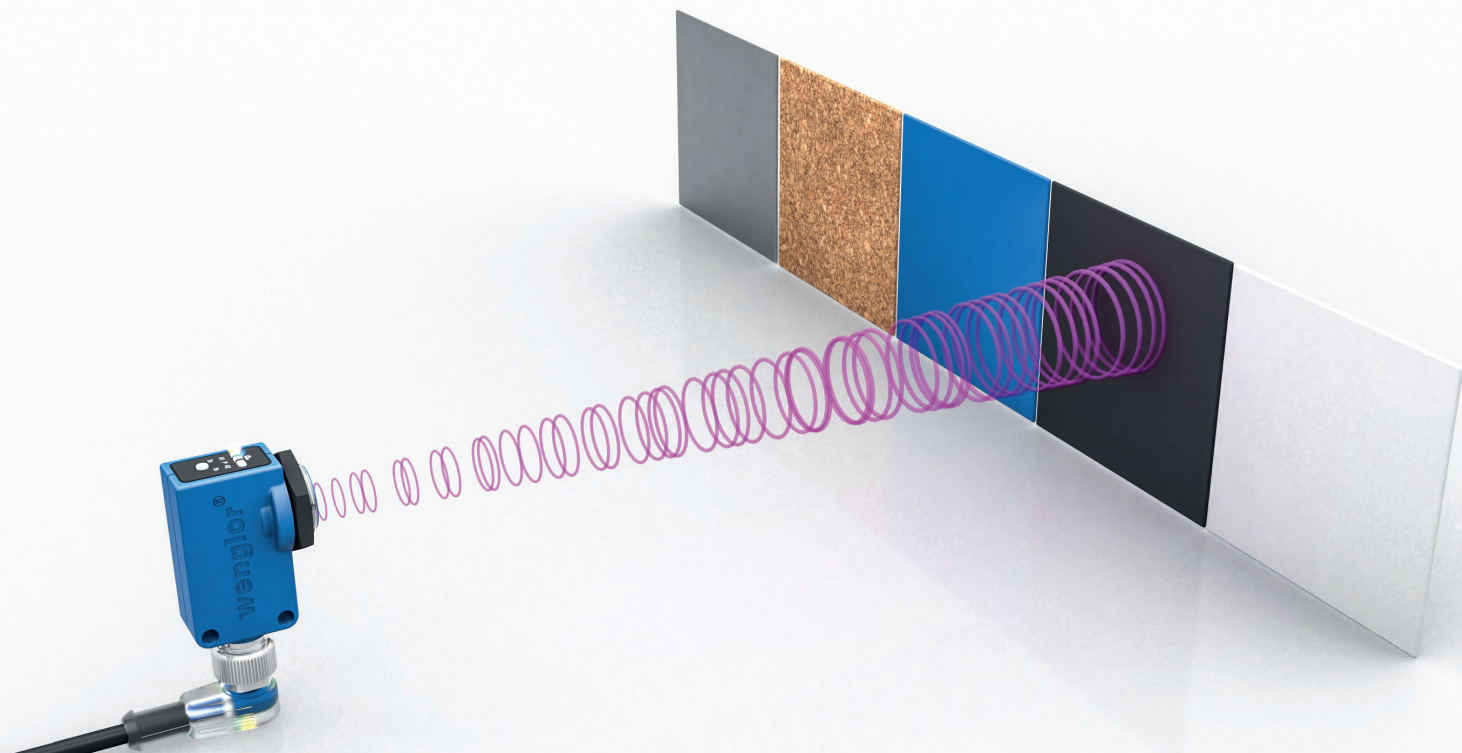


Overview of Operating Modes

Ultrasonic sensors from wenglor are ideally suited for the detection of transparent, glossy and dark objects, reflective surfaces and all kinds of material. A wide range of applications can be reliably solved thanks to different operating modes.



Through-Beam Sensors

- Ultrasonic sensors are positioned opposite each other as emitters and receivers
- Offer very long ranges



Reflex Sensors

- Emitter and receiver are enclosed in a single housing
- Suitable for distance measurement, detection and measurement of objects



Synchronous Mode

- Ultrasonic sensors emit their ultrasonic pulses simultaneously (synchronously)
- Detection of one or more objects in a larger area



Multiplex Mode

- Ultrasonic sensors alternately emit pulses which do not affect each other
- Suitable for multiple, independent measurements in tight spaces

Wide Range of Uses



Presence check



Film tear monitoring



Fill level monitoring



Sag detection



Robot positioning



Stacking height monitoring





Label detection



End position control

Fill Level Monitoring in Vibrating Spiral Conveyors

To reliably replenish the supply of screws, rivets or bolts in vibrating spiral conveyors, the fill level must be constantly monitored. Due to the vibration of the container, the objects are transported away via a spiral so that the container is emptied. The fill level is monitored by an ultrasonic distance sensor with IO-Link.

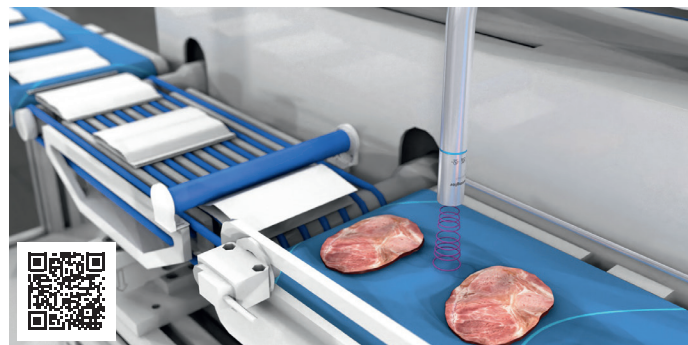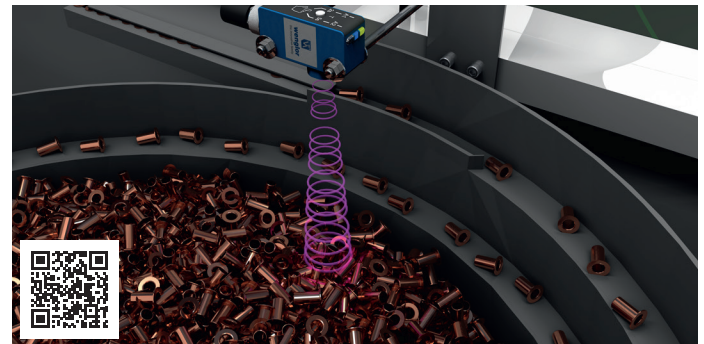

Detection of Food on Conveyor Belts








When packaging foods, the objects portioned into slices are transported on conveyor belts and first wrapped in paper. To ensure that the paper is placed at the right moment, an ultrasonic sensor must first reliably detect the incoming food despite different colors, shapes and surfaces.



You can find all the details and even more about ultrasonic applications on our website.



Product Overview

Product	Format	Working range in reflex mode	Working range in through-beam mode	Interface
 U1KT	32 × 16 × 12 mm	30...400 mm	1...800 mm	IO-Link
 U1RT	56.5 × 26 × 24 mm / M18	100...1,200 mm 80...400 mm	1...2,000 mm	IO-Link, NFC
 U2GT	D20	50...600 mm 150...1,300 mm	1...1,200 mm 1...2,600 mm	IO-Link
 UMD	M18	50...400 mm 100...1,200 mm	–	IO-Link
 UMF	M30	50...400 mm 200...3,000 mm	–	IO-Link
 UMS	81 × 55 × 30 / 47 mm	100...1,200 mm 200...3,000 mm 300...6,000 mm	–	IO-Link
 U1HJ	54 × 90 × 20 mm	Fork width: 3 mm		–



Z1KG001 soundpipe for narrowing the sonic cone of the U1KT



You can find all the details about the ultrasonic portfolio on our website.





wenglor
the innovative family



www.wenglor.com
info@wenglor.com