


Bağlantı kablosu

M12 × 1; 4 pin'li

S27-2MPUR

Sipariş numarası

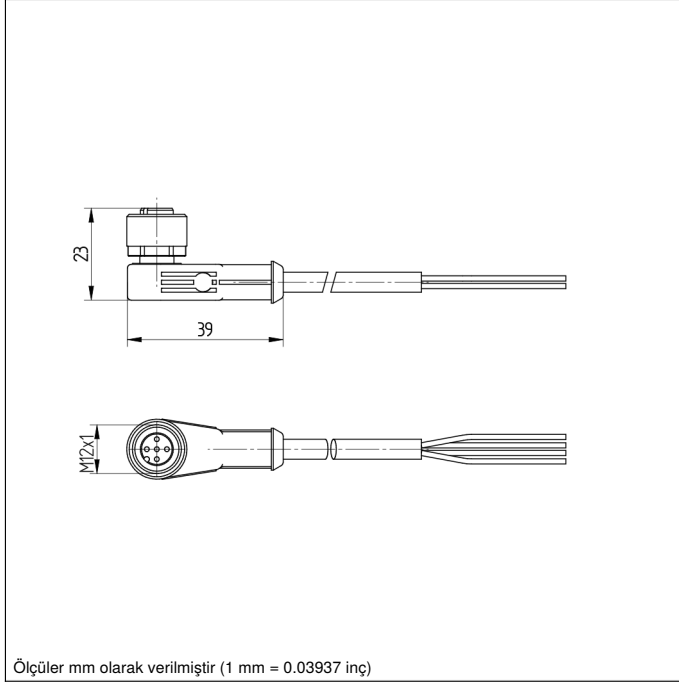

* Kontak başına



Teknik Veriler



Elektriksel veriler

Besleme gerilimi ≤ 24 V DC

Mekanik veriler

Bağlantı 1	Soket, açılı
Bağlantı türü 1	M12 × 1, 4 pin'li
Bağlantı 2	siyirilmiş
Sıkma torku	M12: 0,6 Nm
Kablo uzunluğu	2 m
Dış çap (d)	4,7 mm
Damar kesiti	0,34 mm ²
Gösterge	LED
Koruma sınıfı	IP67
Sıcaklık aralığı (sabit döşenmiş)	-40...80 °C
Sıcaklık aralığı (hareketli kullanım)	-25...80 °C
Kablo kılıfı materyali	PUR
Kablo damar izolasyonu materyali	PP
Rakor somun materyali	Pirinç, nikel kaplı
Halojen içermez	Evet
Hareketli kullanıma uygun	Evet
Bükülme yarıçapı (sabit döşenmiş)	5 × d
Bükülme yarıçapı (hareketli kullanım)	10 × d
Hareket hızı (5 m yatay hareket yolu uzunluğunda)	≤ 3 m/s
İvmelenme	≤ 5 m/s ²
Test edilen büküm sayısı	≤ 1000000
Paketleme birimi	1 adet
Bağlantı şeması no.	S03
Bağlantı tekniği no.	2

- Halojen içermez, hareketli kablo kanallarında kullanım için uygundur
- PUR, LED'li, açılı

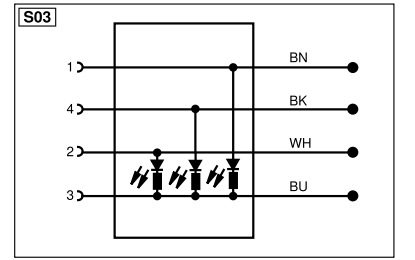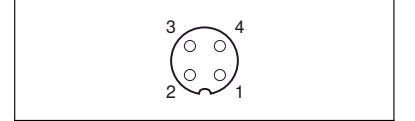

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/Ė (TTL)
-	Supply Voltage 0 V	U	Test Input	ENa	Encoder A
~	Supply Voltage (AC Voltage)	Ũ	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ũ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	QLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	RSV	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ė (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARIS422	Encoder A/Ė (TTL)		