

# Reflex Sensor with Background Suppression


## P1KH017

Part Number



- Condition monitoring
- Detect extremely small parts starting at 0.1 mm
- High-end
- IO-Link 1.1
- Laser class 1

The reflex sensor with background suppression works with laser light according to the angle measurement principle. It has a IO-Link interface with a data storage function as well as additional configuration and diagnostic options. The interface can also be used to configure the sensors (PNP/NPN, NC/NO, switching distance, error output), as well as for reading out switching statuses and distance values. The teach-in function also provides another configuration option. Two independent switching outputs can be used, for instance, to monitor minimum and maximum values of distances or fill levels and stack heights.

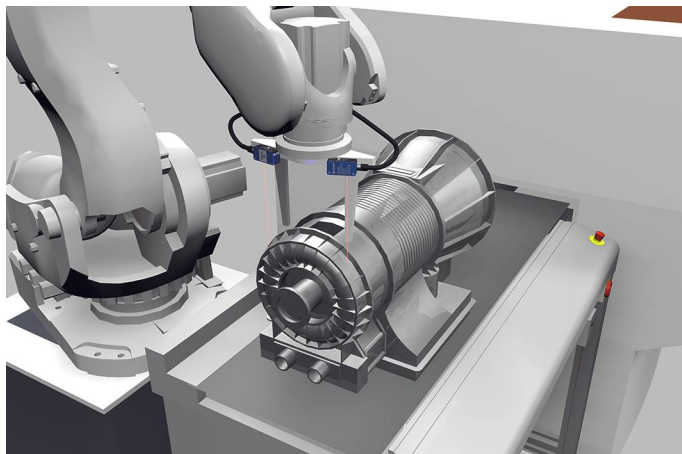

### Technical Data

Optical Data	
Range	120 mm
Setting Range	30...120 mm
Switching Hysteresis	< 10 %
Light Source	Laser (red)
Wavelength	680 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data	
Supply Voltage	15...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (U <sub>b</sub> = 24 V)	< 15 mA
Switching Frequency	100 Hz
Switching Frequency (1 Switching Output)	1000 Hz
Response Time	5 ms
Response time (1 switching output)	0,5 ms
Temperature Drift	< 5 %
Temperature Range	-40...50 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Interface	IO-Link V1.1
Data Storage	yes
Protection Class	III
FDA Accession Number	1710976-001


Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic, ABS/PC
Degree of Protection	IP67
Degree of Protection	IP68
Connection	M8 × 1; 4-pin
Optic Cover	Plastic, PMMA

Safety-relevant Data	
MTTFd (EN ISO 13849-1)	1480,59 a
Scope of delivery	1 × initial start-up instructions 1 × sensor

PNP NO	●
IO-Link	●
Connection Diagram No.	<b>221</b>
Suitable Connection Equipment No.	<b>7</b>
Suitable Mounting Technology No.	<b>400</b>


### Complementary Products

IO-Link Master Software	
-------------------------	--

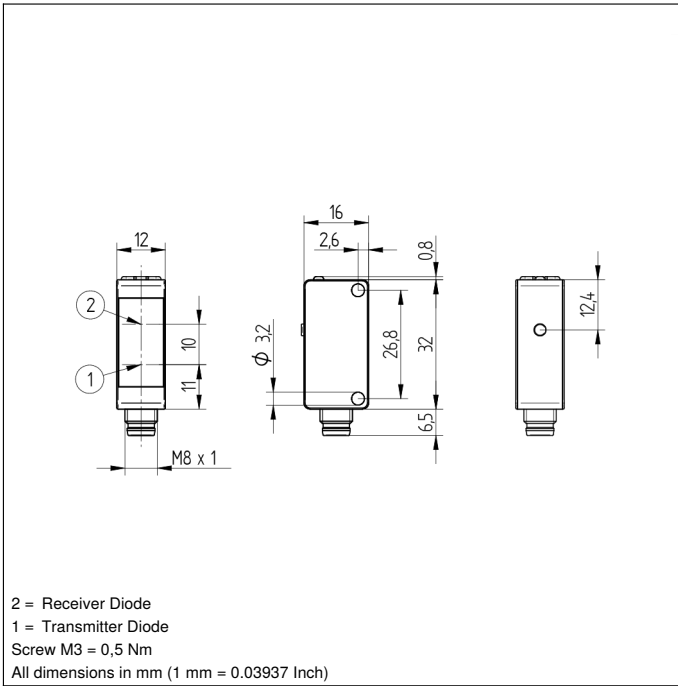


### Ctrl. Panel

A 23



- 06 = Teach Button
- 30 = Switching Status/Contamination Warning
- 5a = Switching Status Indicator, O1
- 68 = Power LED
- 6a = Switching Status Indicator, O2

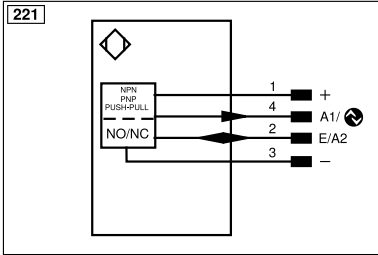


Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	Not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ū	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Ṽ	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
R	Reset input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	≡	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
QSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring
			ENAR5422 Encoder A/Ā (TTL)
			ENBR5422 Encoder B/B̄ (TTL)
			ENA Encoder A
			ENB Encoder B
			AMIN Digital output MIN
			AMAX Digital output MAX
			AOK Digital output OK
			SY In Synchronization In
			SY OUT Synchronization OUT
			OLT Brightness output
			M Maintenance
			rsv Reserved
			Wire Colors according to DIN IEC 60757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow

Table 1

Detection Range	40 mm	80 mm	120 mm
Light Spot Diameter	2,5 mm	1,5 mm	1 mm

### Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

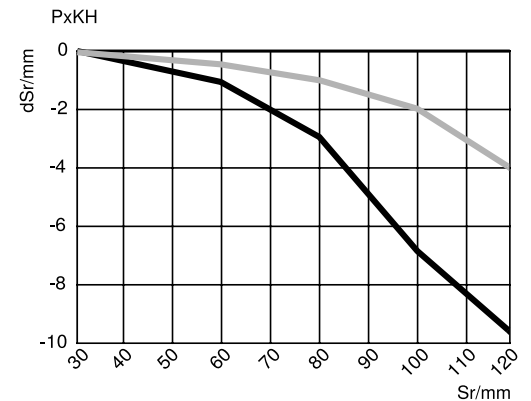

dSr = Switching Distance Change  
 Sr = Switching Distance

— grey 18 % remission  
 — black 6 % remission

