wenglor
the innovative family


Technical Data

P1NL412

Retro-Reflex Sensor

Universal



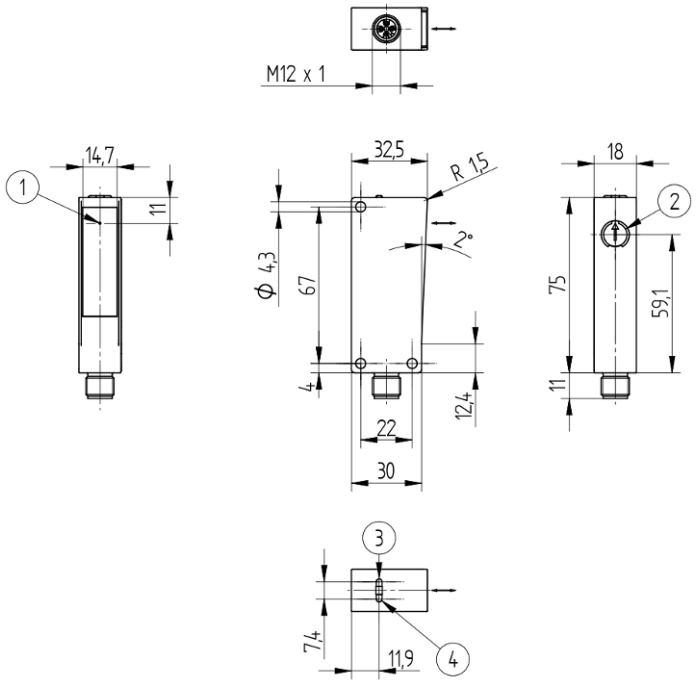

Symbol	Key
1	Optical axis
2	Switching distance adjuster
3	Power LED
4	Switching status indicator/contamination warning

EN

Dimensions in mm
Subject to change without notice
Version 0
www.wenglor.com

Technical data

Optical Data	
Range	5000 mm
Reference Reflector/Reflector Foil	RE6151BM
Min. Distance to Reflector	0 mm
Smallest Recognizable Part	0.3 mm
Switching Hysteresis	< 15 %
Light Source	Laser, red
Light spot geometry	Focused
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	1.5 mm
Focus Distance	180...220 mm
Optics	Single-Lens Optic
Optical axis	Aligned
Switching point	Calibrated

Electrical Data	
Supply Voltage	10...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (Ub = 24 V)	< 20 mA
Switching Frequency	5000 Hz
Response Time	0.1 ms
On-Delay	20 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
FDA Accession Number	1911373-000

Mechanical Data	
Setting Method	Potentiometer
Housing Material	Plastic, ABS/PC
Degree of Protection	IP67 IP68
Connection Type	Plug variant
Connection	M12 × 1; 4-pin
Optic Cover	Plastic, PMMA


Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2369.59 a

General Data	
Scope of delivery	1 × initial start-up instructions 1 × sensor

All other parameters can be found in the product documentation.

BMECat data	
eCl@ss 5.1.4	27-27-09-02 Reflection light barrier
eCl@ss 6.x	27-27-09-02 Reflection light barrier
eCl@ss 7.0	27-27-09-02 Reflection light barrier
eCl@ss 7.1	27-27-09-02 Reflection light barrier
eCl@ss 8.x	27-27-09-02 Reflection light barrier
eCl@ss 10.0.1	27-27-09-02 Reflection light barrier

Technical illustrations

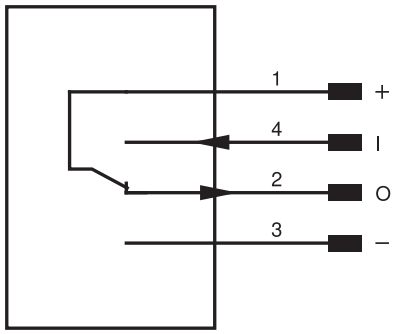

Pin	Pin function	Polarity	Circuit
1	Supply Voltage +		
2	Switching output	PNP	NC
3	Supply voltage 0 V		
4		High activ	

Table 1			
Working Distance	1 m	2,5 m	5 m
Light Spot Diameter	14 mm	37 mm	77 mm

Reflector data	
RQ100BA	0...6.5 m
RE18040BA	0...4.5 m
RQ84BA	0...6 m
RR84BA	0...7.8 m
RE9538BA	0...2.5 m
RE6151BM	0...5 m
RR50_A	0...5 m
RE6040BA	0...6.7 m
RE8222BA	0...3.7 m
RR34_M	0...4.2 m

Reflector data	
RE3220BM	0...3 m
RE6210BM	0...1.8 m
RR25_M	0...2.6 m
RR25KP	0...1.2 m
RR21_M	0...1.5 m
Z90R004	0.15...2.6 m
Z90R005	0.15...3.6 m
ZRAE02B01	0...2.8 m
ZRME01B01	0...1 m
ZRME03B01	0...3.3 m
ZRMR02K01	0...1.3 m
ZRMS02_01	0...1.4 m
RF505	0...1.5 m
RF255	0...1.3 m
RF508	0...1.4 m
RF258	0...1.5 m
RF4050	0...1.2 m
ZRAF07K01	0...1.3 m
ZRAF08K01	0...1.5 m
Z91R001	0...4.2 m
ZRDF03K01	0...5 m
ZRDF10K01	0...4.4 m

Reflector type, mounting distance