

SG4-30IS105C1

Part Number



- Completely integrated electronics
- Quick alignment through visible red light

Technical Data

Optical Data

Range	0,5...20 m
Safety Field Height (SFH)	1080 mm
Resolution	30 mm
Light Source	Red Light
Wavelength	650 nm
Opening Angle	± 2,5 °

Electrical Data

Sensor Type	Emitter
Supply Voltage	24 V DC
Current Consumption (U _b = 24 V)	100 mA
Temperature Range	-20...50 °C
Storage temperature	-25...70 °C
Protection Class	III

Mechanical Data

Housing Material	Aluminum
Disc Material	Polycarbonate
Degree of Protection	IP67
Connection	M12 × 1; 4-pin

Safety-relevant Data

ESPE Type (EN 61496)	4
Safety Category (EN ISO 13849-1)	4
Performance Level (EN ISO 13849-1)	PL e
PFHD	3,08 × E-8 1/h
Mission Time TM (EN ISO 13849-1)	20 a

Function


Hand Protection	yes
-----------------	-----

Connection Table No.	27
Control Panel No.	S5
Suitable Connection Equipment No.	2 2s
Suitable Mounting Technology No.	700

Suitable Receiver


SG4-30IE105C1

These safety light curtains are distinguished by their compact design. They are also equipped with numerous auxiliary functions, allowing for adaptation to the respective application in a highly individualized fashion. The adequate mounting angle BEF-SET-33 is included in the delivery.

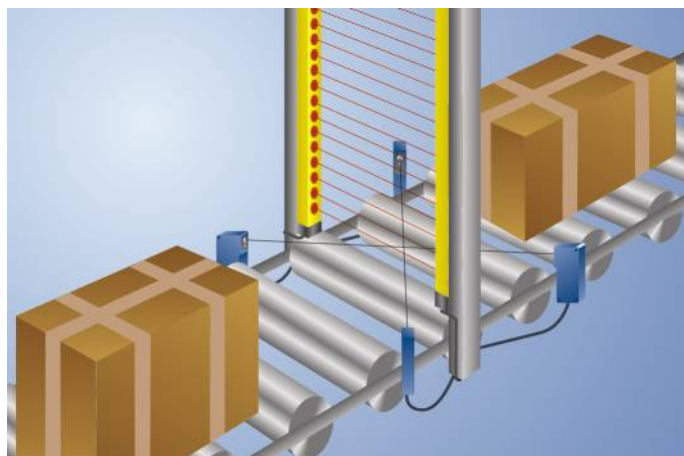

Complementary Products

Laser Alignment Tool SZ0-LAH1
Path-Folding Mirror Z2UG003
Protection Column with Path-Folding Mirror SZ000EU170NN01
Protection Column with Protective Screen SZ000EG170NN01
Software




2 = Receiver

All dimension

All dimensions in mm (1 mm = 0.03937 Inch)

S5



03 = Error Indicator

04 = Function Indicator

20 = Enter Button